
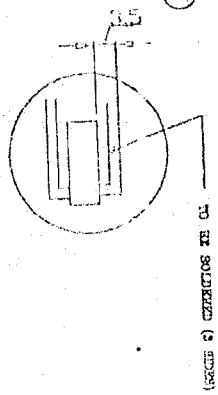


INSTRUCTIONS CONTAINED IN THESE
 DRAWINGS ARE TO BE OBSERVED
 EXCEPT WHERE SHOWN OTHERWISE
 OR WHERE INDICATED OTHERWISE
 BY A NOTE OR DIMENSION LINE
 OR BY A DIMENSION LINE WITH
 A NOTE

CASSETTE CONTAINER (SPECIAL)

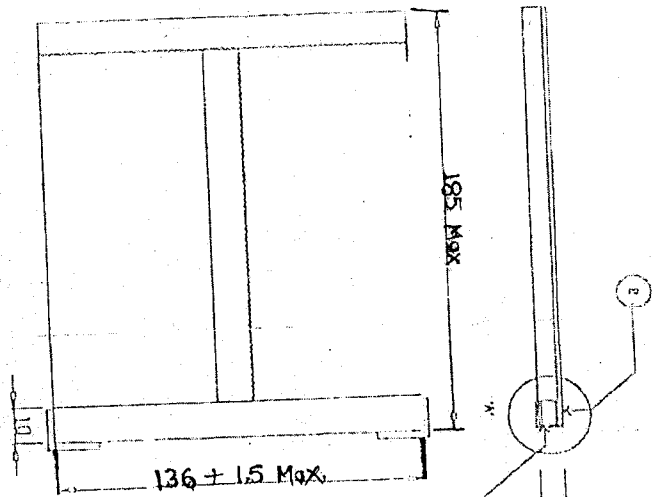

NOTE: SOLDERING SHOULD BE WITH SOLDER SN40 IS; 193-1982
 UN SOLDERED PART OF LOCKING STRIP SHOULD BE
 FOLDED AFTER INSERTING THE CAP AS SHOWN.



LIST OF COMPONENTS

QTY	DESCRIPTION	DRG. NO.	REV.	QTY	REV.
1	CONTAINER	HEXCEL DSG. 1450	1	1	1
2	CAP	HEXCEL DSG. 1450	2	2	1
3	LOCKING STRIP	HEXCEL DSG. 1450	3	3	2

NO.	DESCRIPTION	DATE	BY	CHKD.	APP'D.
1	DESIGN				
2	CONSTRUCTION				
3	TESTING				
4	FINAL				

L.F.No : 4221280011

RESTRICTED

4	3	2	1
PART No.		DRG. CONVENTIONS CONFORM TO IS SPECIFICATIONS	
ER145711		DIM. ARE IN mm	
GEN. TOL. MEDIUM/COARSE/FINE CLASS TO IS:2102			
D			
C			
B			
A			
R No.	DATE	AUTHORITY	REVISION
			ZONE
			AHSP D.O. SIG.
DRG. SEALED:-			
DRN:- SNK	CHD:-	TRD:-	COMP:-
C.D'MAN	OIC D.O.	SCALE:- 1:1	ASSY. DRG. HEMRL DRG 1457/8
APPD. <i>[Signature]</i>	FOR DIRECTOR	EST MASS:-	DESIGN AUTHORITY
MATL: GALVANISED STEEL SHEET, 1mm THICK. IS. 277-1985		GAUGE SCD:-	HEMRL PUNE-411021
PROTECTIVE FINISH:-		DATE:- 15-10-96	
Class:-		DRG. No.	HEMRL DRG. 1457
<p><u>LOCKING STRIP</u></p>		DET. NO. 11	SHTS. SHT. NO.
		PART No.	
		D. S. CAT. No.	
		AHSP:-	

RESTRICTED