


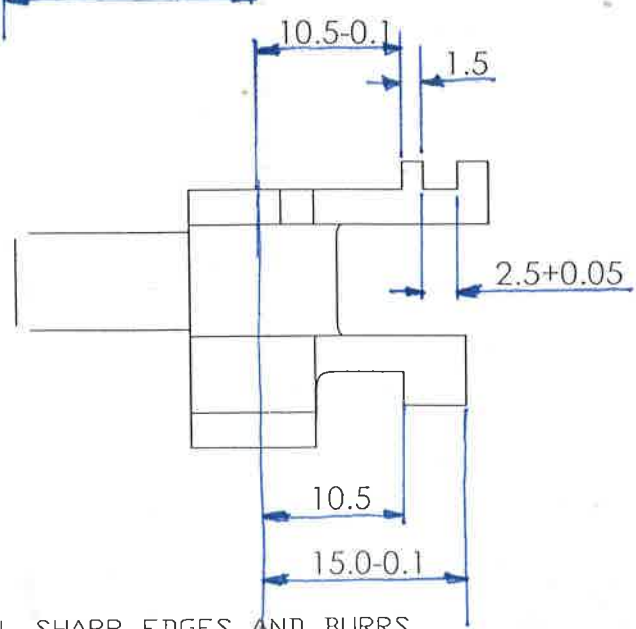
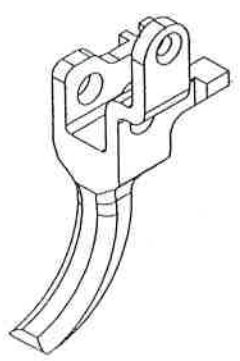
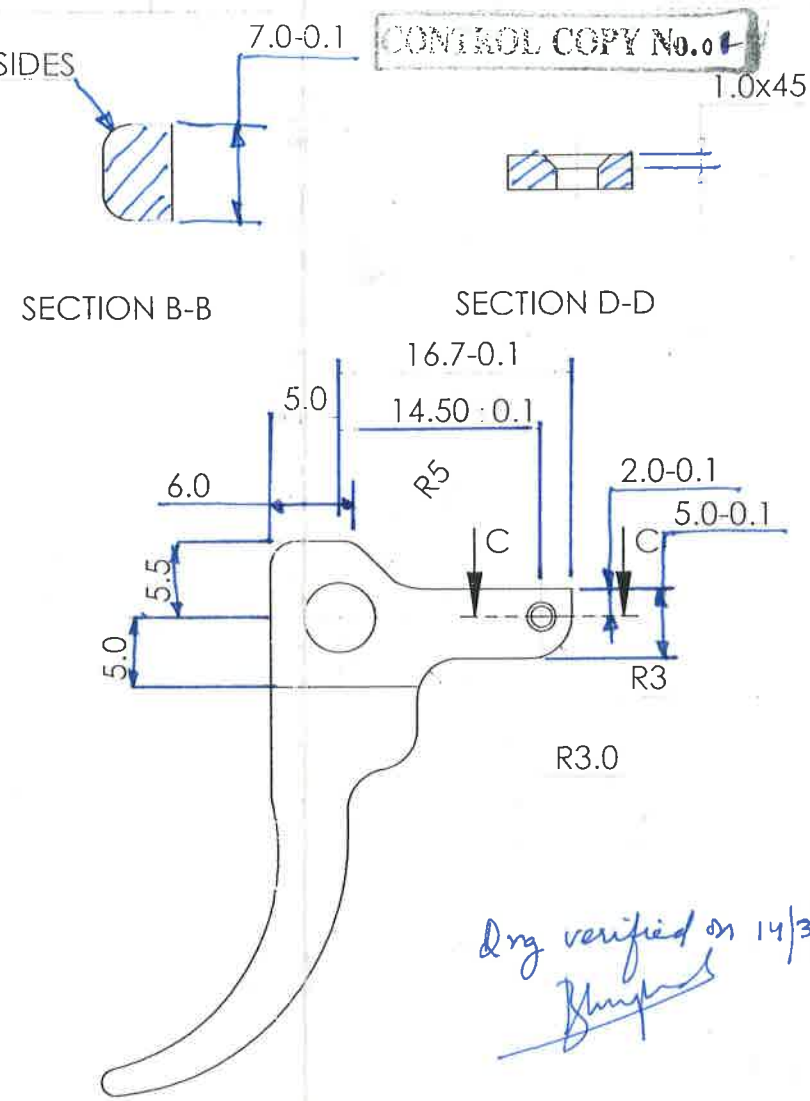
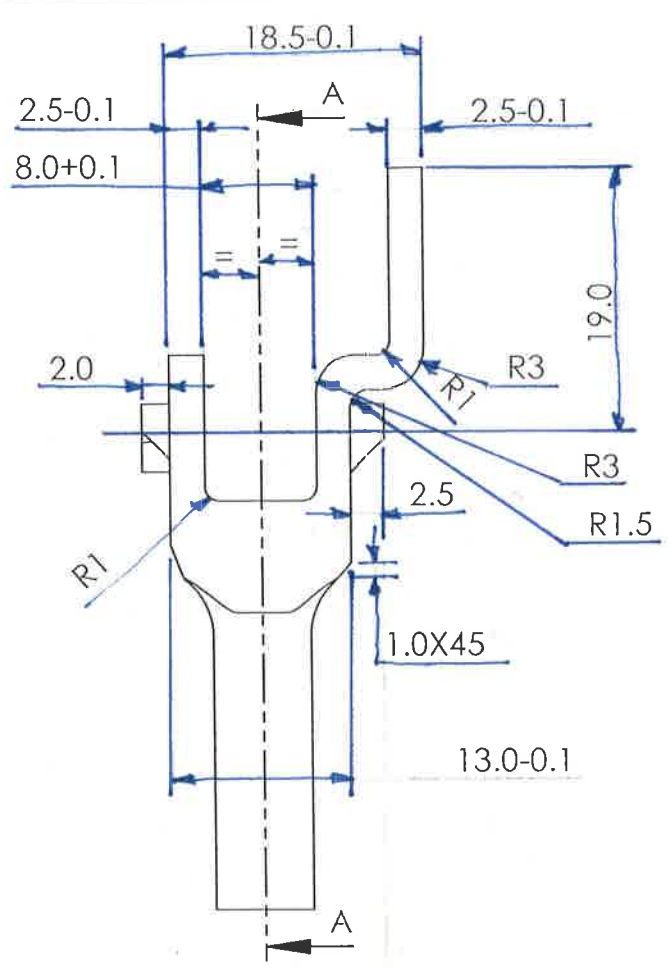


GEN.TOL. : ± 0.2 DRAWING CONVENTION CONFIRM TO INDIAN STDS.
DIMN.IN mm UNLESS OTHERWISE STATED

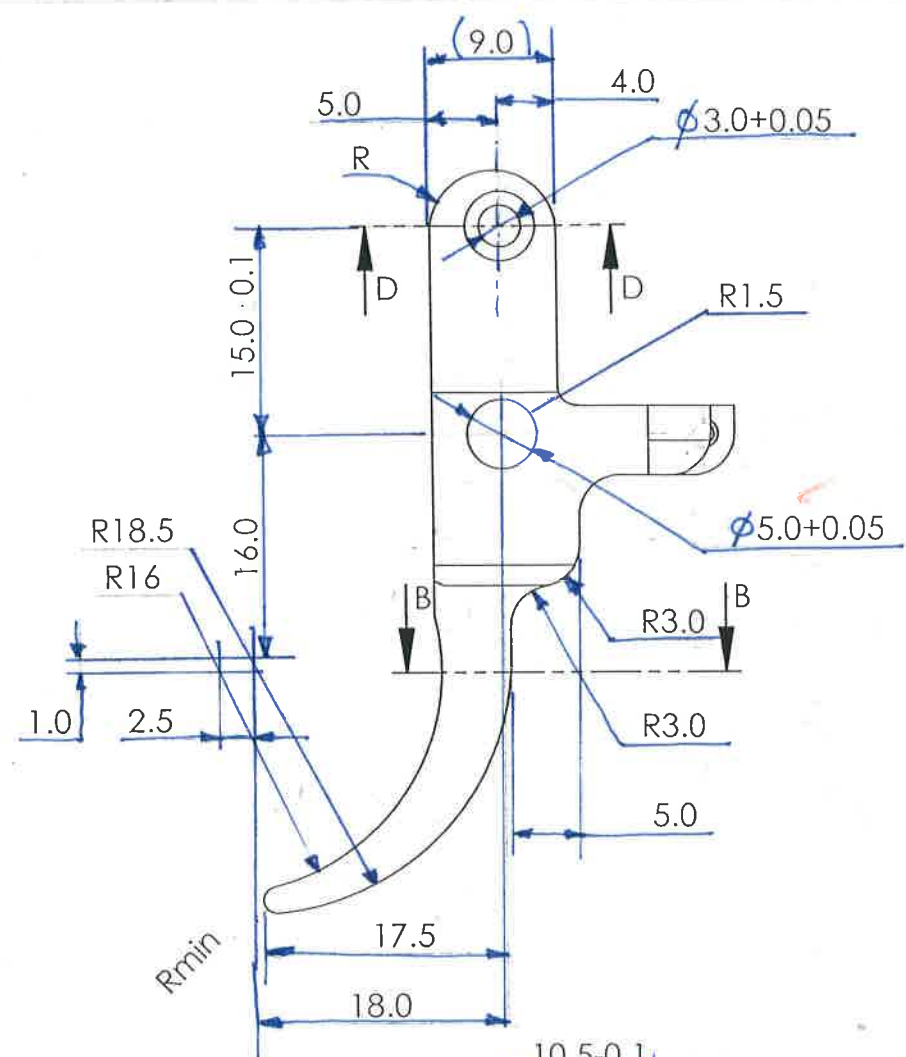

SECTION C-C

SECTION A-A *Received on 29/11/15*

[illegible]

TRIGGER FRONT

- NOTES:
1) REMOVE ALL SHARP EDGES AND BURRS.
2) TOL FOR ANGLES 30' UNLESS OTHERWISE SPECIFIED.
3) CASE HARDENED TO 500-550 HV WITH CASE DEPTH 0.13 TO 0.26
4) ALT. MATERIAL: MIM 9310 (AISI 9310 Equivalent).
HARDNESS 500-600 HV CASE DEPTH 0.1-0.3 mm

CONTROL COPY No. 1