
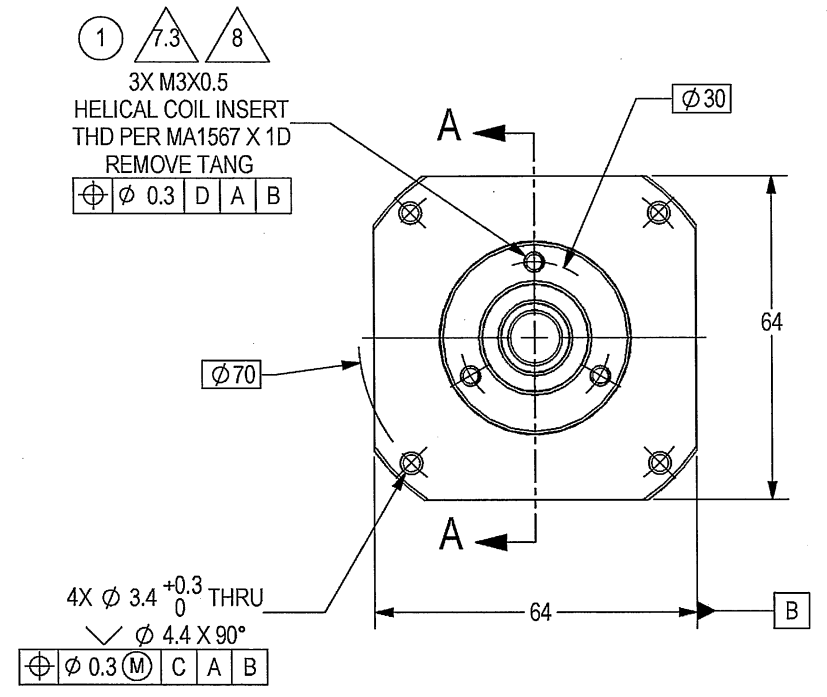


THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PROPRIETARY AND CONFIDENTIAL TO OFT. NO PERSON OR ENTITY IS ALLOWED TO COPY, REPRINT, REPRODUCE OR PUBLISH ANY PART OF THIS DOCUMENT, NOR DISCLOSE ITS CONTENTS TO OTHERS, NOR MAKE ANY USE OF IT, NOR ALLOW OR ASSIST OTHERS TO MAKE ANY USE OF IT UNLESS BY THE PRIOR WRITTEN EXPRESS AUTHORIZATION OF OFT AND THEN ONLY TO THE EXTENT AUTHORIZED.
COPYRIGHT-OFT.


SHEET REV STATUS
ALL SHEETS ARE THE SAME REVISION

REVISION RECORD				
REV	ECO	DESCRIPTION	DATE	APVD
04		Freeze	12-Mar-13	
05		Freeze	25-Aug-13	
06		Freeze	01-Dec-13	
07		Restricted	16-Jul-14	L. Goldshtein
--	T00065	Identical To Previous	Released	09-Apr-18 L. Goldshtein

- NOTES:
- INTERPRET THIS DRAWING IAW ASME Y14.100M.
 - MATERIAL: ALUM. ALLOY PLATE 6061-T651 PER AMS-QQ-A-250/11.
 - UNLESS OTHERWISE SPECIFIED, UNDEFINED MACHINED FILLET RADII SHALL BE 0.2..0.3.
 - DEBURR AND REMOVE SHARP EDGES, APPROX. 0.2X45 Deg.
 - ALL DIMENSIONS ARE BEFORE COATING.
 - GENERAL TOLERANCES ACCORDING TO ISO 2768-m.
 - FINISH:
 - CHEMICAL CONVERSION COATING PER MIL-DTL-5541F TYPE I CLASS 3.
 - ANODIC COATING PER MIL-A-8625 TYPE II, 20±5 MICRON THICK CLASS 2, COLOR BLACK #37038 PER FED-STD-595.
 - SURFACES DEFINED BY AND THREADS SHALL BE PROTECTED AGAINST ANODIC COATING.
 - INSTALL INSERTS AFTER FINISH PER MS33537 USING PRIMER EPOXY PER MIL-P-53022.
 - QUALITY ASSURANCE PROVISIONS:
 - QUALITY ASSURANCE PROVISIONS FOR THIS ITEM PER RDMQD00012P.
 - PARENTHEICAL FIGURES ARE FOR REFERENCE ONLY.
 - PACKAGING AND PACKING: THE FINISHED PART SHALL BE PRESERVED AND PACKAGED IN ACCORDANCE WITH MANUFACTURER'S BEST COMMERCIAL PRACTICE.
 - IDENTIFY PER MIL-STD-130 PARA 4.1.B, BY LABELING ITS CONTAINER WITH THE PART NUMBER. CHARACTERS MINIMUM TEXT HEIGHT 1.25 MM.

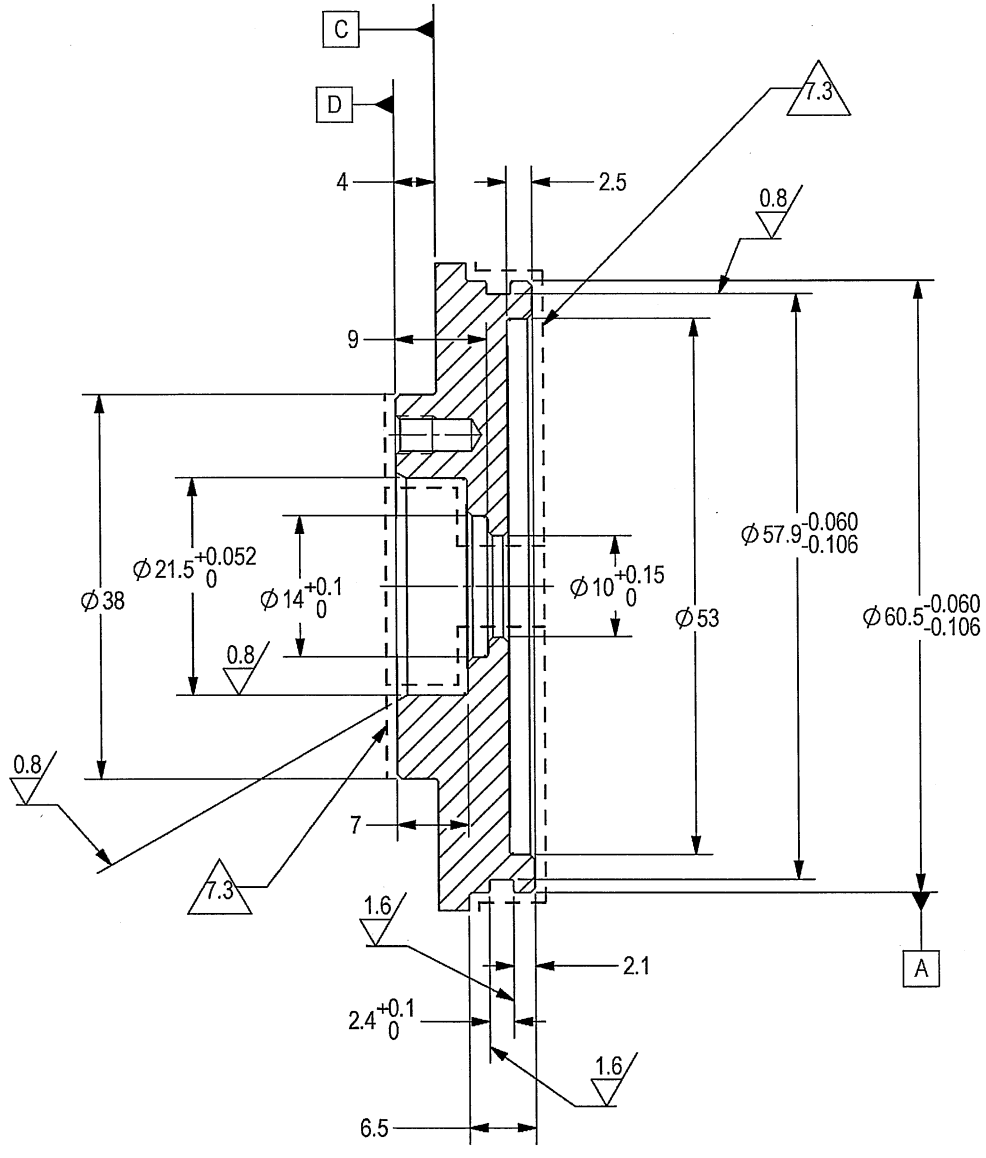

SECTION A-A
SCALE 2 : 1

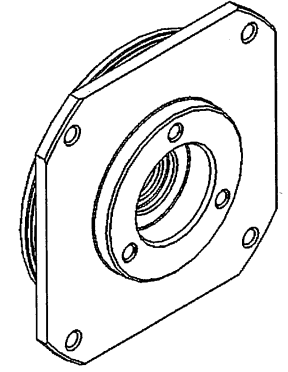

(WEIGHT: 0.07 Kg APPROX.)

SEE ATTACHED MEDIA
SEE SEPARATE PARTS LIST

UNLESS OTHERWISE SPECIFIED		SIGNATURE	DATE	ORDNANCE FACTORY TIRUCHIRAPPALLI	
DIMENSIONS ARE IN MM PER ASME Y14.5 - 2009		DRAWN	17/04/14	FOR: SOLENOID SHOT ASSY	
TOLERANCES		CHECKED		TITLE COVER SOLENOID 1	
LINEAR	ANGULAR	HOS/DDO	10/0	OF: 12.7MM SRCG	
SEE NOTE 6	SEE NOTE 6	OFFICER/PRODN		SIZE	CAGE CODE
1st ANGLE PROJECTION		OFFICER/OC		C	2291A
SURFACE TEXTURE IN Micro Meter		OFFICER/DDO		DWG NO	065281A-00
PROJECT OFFICER		PROJECT		SCALE	1:1
PLM Control		FORM NO		AUTOMATED DRAWING (SW)	YES
		065281A-00 COVER_SOLENOID_1		SHEET 1 OF 1	
				STATUS	WIP

DWG NO 065281A-00
SR 1

OFT

ASSEMBLY PARTS LIST

Assembly Parts List For: 065281A-00

Rev: -

Status: Released

Description: COVER SOLENOID 1

FN	CMD	PART NUM	ECO	DESCRIPTION	MB	QTY	U\M	REF. DES./REMARKS	MFG. PN / CUSTOMER	LA	LI
1	HM	99662212M		INSERT HCOIL CRES M3X1D	P	3	Each		60043-TNM3X0.5C-3(SEE NOTES)		