
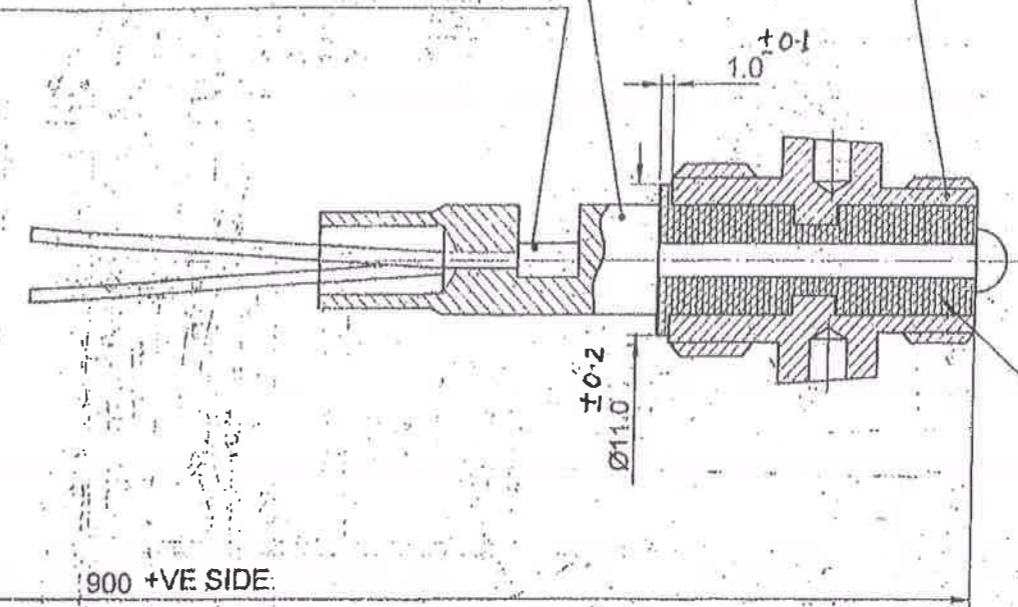


INSULATION TO BE REMOVED AND SOLDERED TO ITEM 3

ELECTRICAL WIRE MULTISTRAND WITH INSULATION CABLE

ELECTRICAL INSULATION TO BE REMOVED AND SOLDERED TO ITEM 2

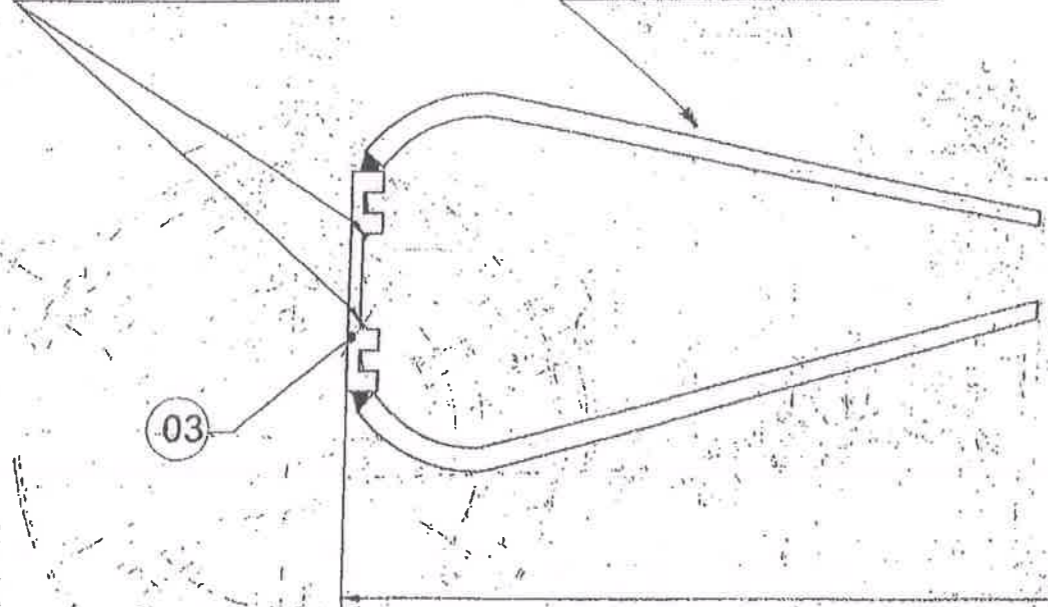

**REFERENCE**

PHENOL FORMALDEHYDE TO SPEC JSS: 9330-05-2002 OR SP-16

ENSURE ONLY SATISFACTORY FITMENT

ISSUED BY STANDARD CELL  
for EOI  
DATE: 9/9/19  
SIGNATURE: *[Signature]*

**NOTES:-**

1. DIA OF COPPER WIRE WITH PVC INSULATION : 1.9
2. NUMBER OF STRANDS : 16 TO 19
3. DIA OF EACH STRAND : 0.21
4. GAUGE NO. OF WIRE (INDIVIDUAL STRAND) : 35
5. I R OF WIRE : > 20 ML WITH 500-V MEGGER
6. CONNECTOR TO BE SOLDERED WITH WIRE, ONLY AFTER ASSEMBLY WITH CORE TO DRG. NO NASK 1068/9.

SL NO	DESCRIPTION	DRG NO.	QTY	REMARKS
03	CONNECTOR	NASK1068/8/3 (PROV)	01	
02	CONTACT	NASK1068/8/2 (PROV)	01	
01	BODY	NASK1068/8/1 (PROV)	01	

**LIST OF COMPONENTS**

R.No	DATE	ZONE	BRIEF RECORD	AUTHORITY	INITIALS	PROTECTIVE FINISH	GAUGE SCHEDULE No.
	14.1.11		NOTE - 6 ADDED	ARD2413	<i>[Signature]</i>		
	02-06-09		APPROVED	DGNAI	<i>[Signature]</i>		

SCALE N.T.S.	DIMENSIONS ARE IN mm	TOL	D.S.CAT No	ASSY.DRG. No.1068
DGN. -	DRM P. Singh	COMP. <input checked="" type="checkbox"/>	CHD. <i>[Signature]</i> 4 CD	ASSY.DRG.LIST No.
PASSED <i>[Signature]</i>	APPROVED <i>[Signature]</i>	THREADS TO CONFIRM IS: 4218		DTE GEN OF NAVAL ARMAMENT INSPECTION IHQ, MoD (NAVY), N DELHI
		GEN.SPEC: IS: 2102		
		STORE SPEC. NO.		
		STORE REF. No.		
		GAUGE SCHEDULE No.		

**ASSY CENTRE CONTACT**

DRG.No. **NASK1068/8**  
(PROVISIONAL)