DS CAT No. 1005-557944

DRAWING CONVENTIONS CONFORM TO JSG:0104
DIMNS. ARE IN m m. | GEN. TOL. 'MEDIUM' TO IS:2102



SECTION–AA

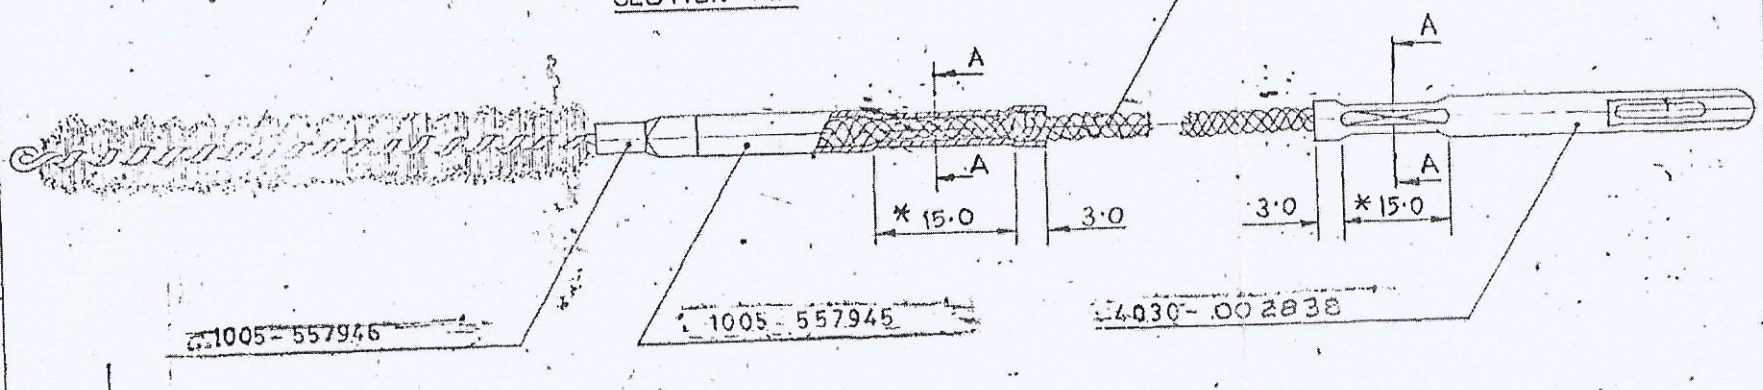

NOTE:- FOR USE OF WEIGHT, PULL THROUGH CUM CLEANING PATCH ROD (CQA(SA)SK-369/2), REMOVE BRUSH ASSY FOR PULL THROUGH CQA(SA)SK-369/3

SYNTHETIC/NYLON CORD, ACCEPTANCE TEST :-

1. FLEXIBILITY :- THE SPECIMEN CORD (APPROX) 100 Cm LENGTH SHALL MAINTAIN PERFECT FLEXIBILITY AFTER COLD AND HOT TEST NO SIGN OF CRACKING OR OTHER DETERIORATION SHALL BE VISIBLE AND THE SPECIMEN SHALL CONTINUE TO WITHSTAND PULL TEST OF 35 Kg.
2. BREAKING LOAD (15 cm BETWEEN THE GRIPS) :- MIN. 100 Kg.
3. COLD TEST :- THE SPECIMEN CORD TO BE PLACED IN A COLD CHAMBER FOR 6 HOURS MAINTAINED AT A TEMP. OF -40 °C.
4. HOT TEST :- THE SPECIMEN CORD TO BE PLACED IN A HOT CHAMBER FOR 6 HOURS MAINTAINED AT A TEMPRATURE OF +60°C.
5. ✕ SUITABLY SQUARE CRIMPED AS PER SECTION A-A TO WITHSTAND 35 KG PULL TEST

NSN: B1/1005-72-0000944

DATE	AUTHY.	BRIEF RECORD	ZONE	I/C, DO	G.O.
30-7-10	26532-SA	NSN ADDED			
4-3-08	26403-SA	MATERIAL AMENDED.			
20-10-2000	24847-SA	NOMENCLATURE AMENDED AND D.S.CAT. NOS ADDED			
11-11-99	24583-SA	BREAKING LOAD INSERTED & TENSILE STRENGTH DELETED	S/D		
26-07-99	24438-SA	NOTE AMENDED.	C/1-4		
05-07-99	24423-SA	DRG. PROV. SEALED			
SEALED PROV.		DC NO. 24423-SA DT. 05-07-99.		SIGN.	

NOMENCLATURE - PULL THROUGH 5·56mm. 1A (NYLON)

DRN. | CHD. | TRD. | COMP.
SCALE - NOT TO SCALE
EST MASS -
APPROVED.
DT. 04.5.99 I/C. DO. DT. 04.5.99 FOR CQA(SA)
MATERIAL - SYNTHETIC/NYLON CORD TO SPECN IS:4227:1998, VARIETY No. 7.
HT./HARDNESS -
PROTECTIVE FINISH -

AHSP CQA(SA), ICHAPUR
ASSY.
DGNR'S REF. CQA(SA)SK-369
PART No.
DRG. No.
DS CAT No. 1005-557944

09/06/20