


ORG. CONVENTIONS CONFORM TO IS: SPECIFICATIONS
DIMENSIONS ARE IN mm.

GEN. TOLERANCE MEDIUM CLASS TO SPEC. IS:2102(PART1):1980(RA1991).

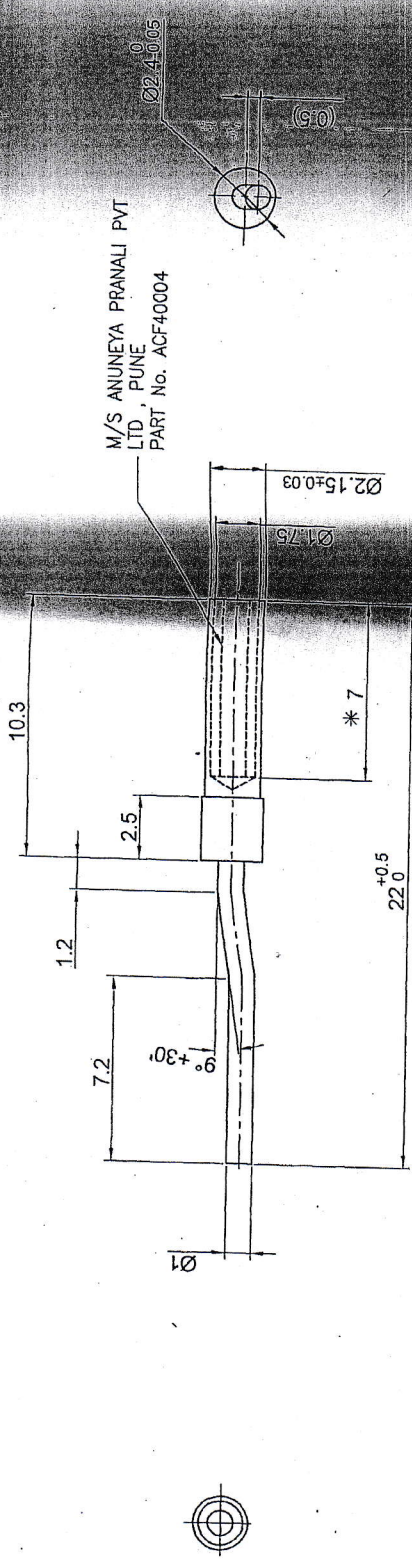

NOTE :-

1. DIMENSIONS APPLY AFTER PLATING.
- * 2. DIMN. OF SOCKET & PIN TO BE ADJUSTED TO MAX.7.0 mm CONTACT LENGTH.
3. SOCKET TO BE FIXED IN THE CAVITY FIRMLY.

PROTECTIVE FINISH:

TO BE GOLD PLATED Zn/CU/Ni/Au (99) TO SPEC.IS:3266 -1982
TO BE GOLD PLATED LAYER THICKNESS 1.27 MICRONS.

DRG. NO.	DATE	AUTHORITY	REVISION	ZONE	AHSP. D.O.	SIG.	DRG. SEALED
MATERIAL: BRASS TO SPEC. IS:319-2007 Gr.-II, CONDITION: HB			FINISH: AS ABOVE				
DESIGNER'S REF. ARDE 9707 00 01 17 18 001 00TA			PART NO.				
DIS. CAT. NO.			DESIGNER'S REF.				
PART NO.			DESIGNER'S REF.				
DIS. CAT. NO.			DESIGNER'S REF.				

SOCKET FOR CONTAINER CLEARING CHARGE