
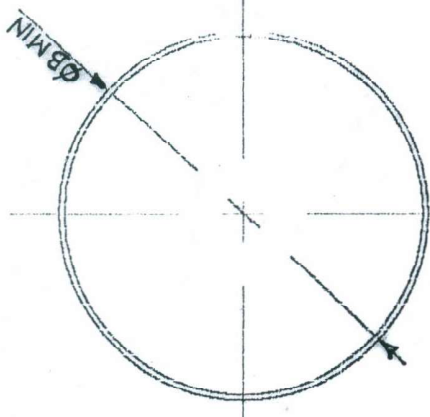


15

SEALD CLOSED END
LINE X-X INDICATES HEAT

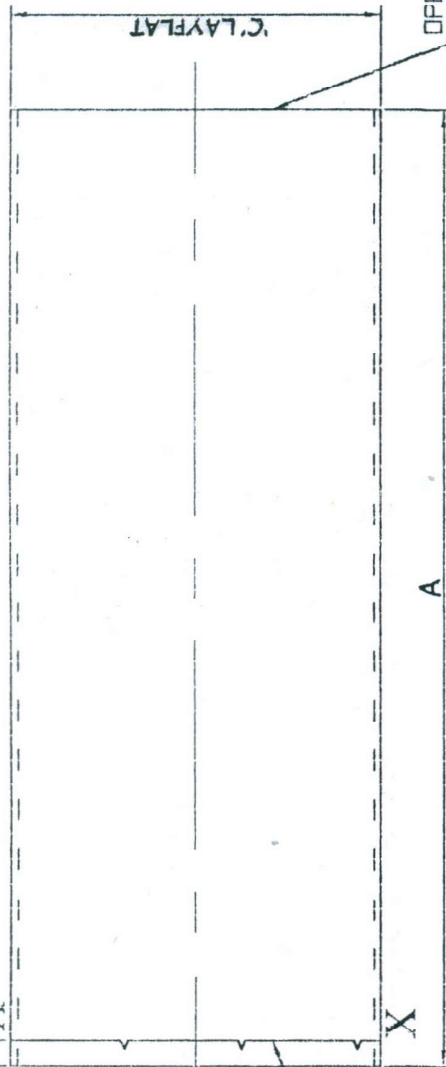

NOTES :-

1. ALL DIMENSIONS ARE IN mm.
2. THE MINIMUM THICKNESS OF THE POLYTHENE BAG SHOULD BE ± 0.1 mm.
3. THE FILM SHOULD BE FREE FROM ANY OBJECTIONABLE ODOUR
4. THE FILM SHOULD BE UNIFORM IN COLOUR, TEXTURE & FINISH. THE MATERIAL SHOULD BE SUBSTANTIALLY FREE FROM PIN HOLES, UNDISPERSED RAW MATERIALS, STREAKS AND PARTICLES OF FOREIGN MATTER. THERE SHOULD NOT BE ANY OTHER VISIBLE DEFECTS, SUCH AS HOLES, TEARS OR BLISTERS. THE EDGE SHOULD BE FREE FROM NICKS AND CUTS VISIBLE TO UNAIDED EYE.

MATERIAL SPECIFICATION: ③
L.D.P.E. GRADE TYPE-1 TO
SPCN. JSS: 9330-03: 2014, REV NO-3

LENGTH 'A'		DIA. 'B'	THICKNESS 'D'	LAY FLAT 'C'
MIN	MAX			
1160	1180	205	± 0.1 0.4	± 15 320 ± 0.0

SL. NO.	DATE	BRIEF NOTES	AMENDMENTS
③	16-06-16	LATEST MATL (IS) SPECN. UPDATED BY REF: 08/03/16 (LATEST MATL (IS) ADDED.	
②	29/11	1/2 MATL L.D.P.E. GRADE 'A' ADDED. REF: No. OFA/STD. 004/515 VET/DEG/08	
①	17-4-08	DT: 15-4-08	

ORDNANCE FACTORY, AMBARNATH		DRAWN	
POLYTHENE PROTECTIVE BAG FOR CARTG. CASE 130 MM		JWMIQCA	
DRG NO: CCI30/SK/0007/C			
SCALE	DATE	PROJ.	SHT. NO.
NTS	24.02.04	3rd	1 OF 1

THIS DRG. SUPERSEDES OF DRG. NO. MISC/SK/764/1 DTD. 24/11/95 (Last Amendment)

DDO/ICZ/DDO DRG/SJFGZ/MISC