



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

JSS C V VV S SS OI  
 0 0 9 0 1 0 1 0 1 0 1 0 1 0  
 GENERAL TOL. - FINE / MEDIUM / COARSE DRG. CONVENTIONS CONFIRM TO INDIAN STANDARDS  
 CLASS TO IS: 2102 DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED.


ROLLED COPY No.: 01





VIEW X




DETAIL T  
SCALE 1:1

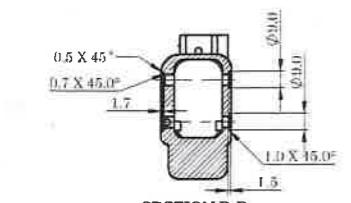



SECTION D-D

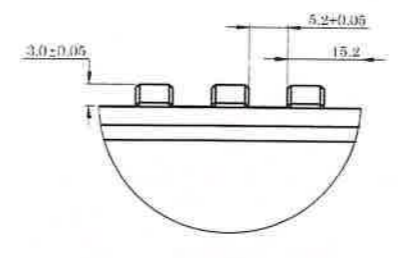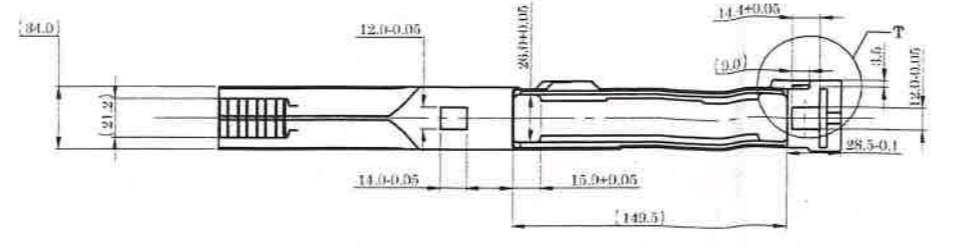


DETAIL R  
SCALE 2:1




SECTION C-C  
SCALE 1:1

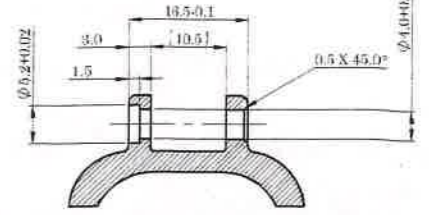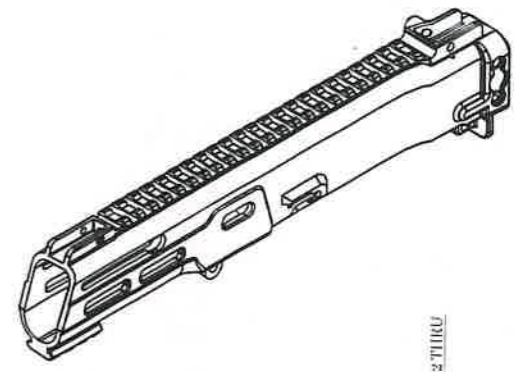



SECTION B-B  
SCALE 2:1

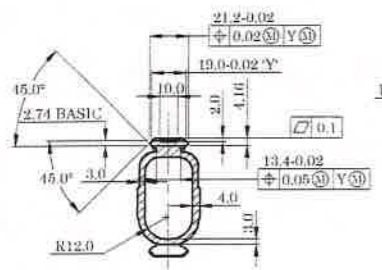


SECTION F-F

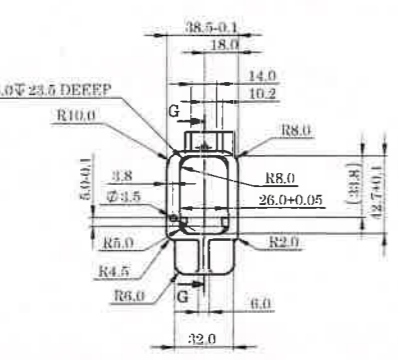


MERGE THIS RADIUS WITH OUTER PROFILE

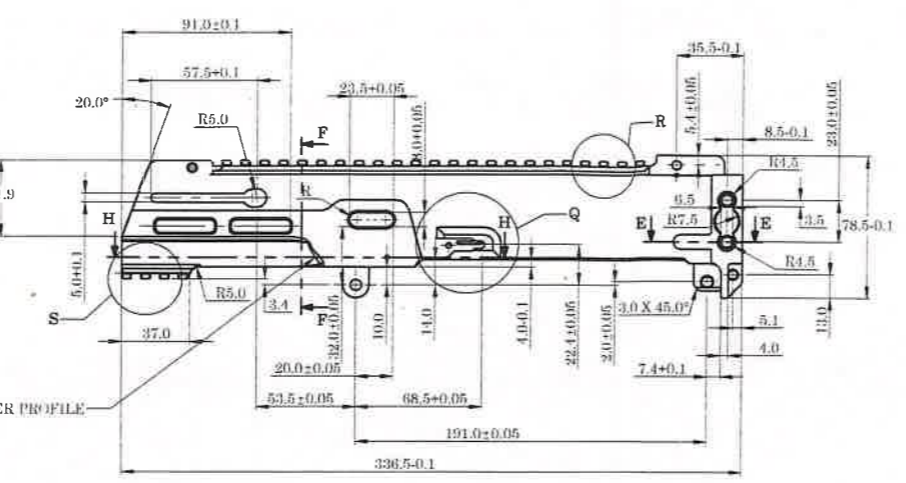


DETAIL P  
SCALE 1:1

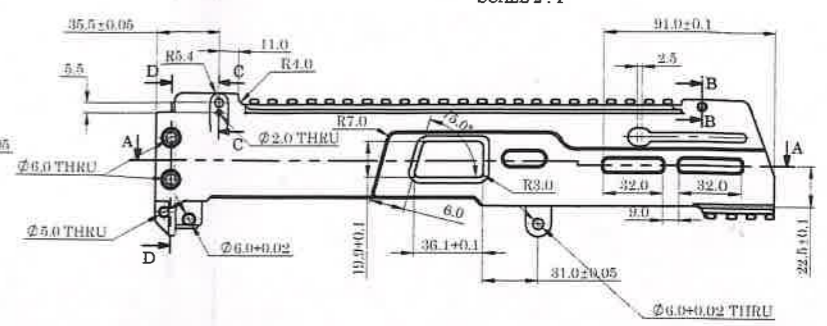


SECTION A-A

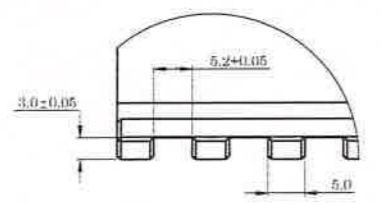


DETAIL S  
SCALE 2:1

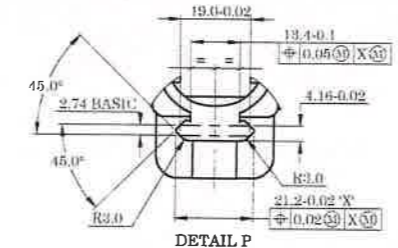


DETAIL P  
SCALE 1:1

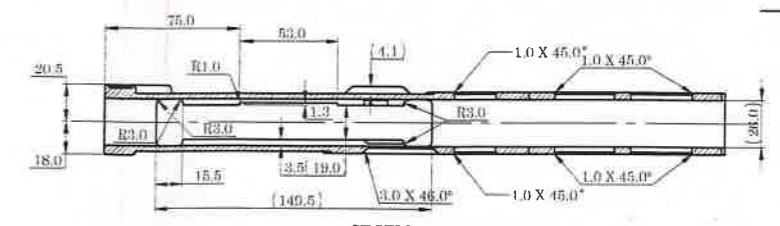


SECTION A-A

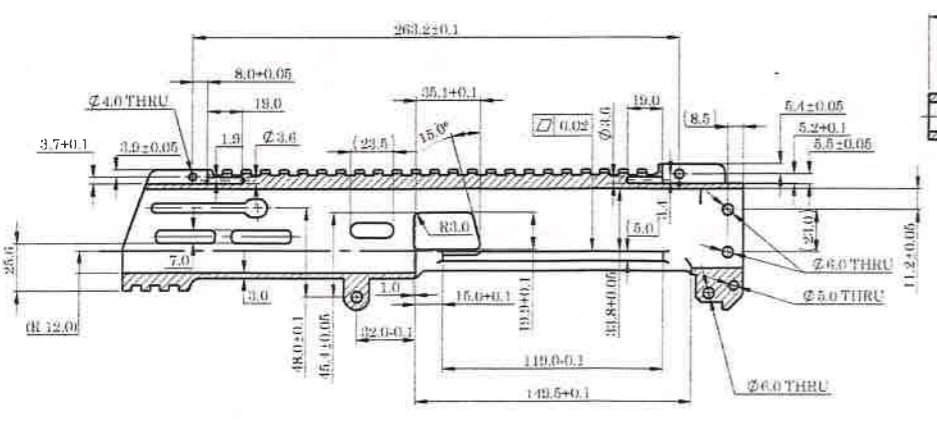


SECTION G-G

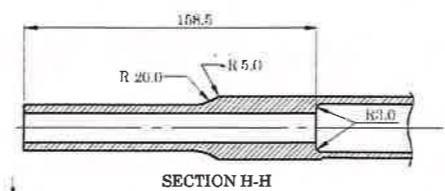


SECTION H-H



SECTION E-E  
SCALE 1:1

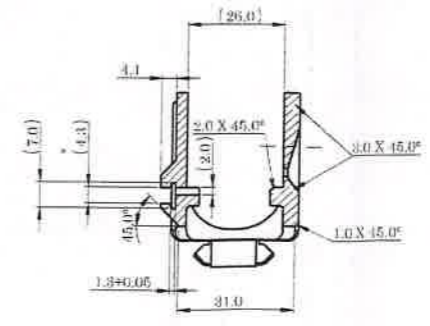

SECTION I-I  
SCALE 1:1

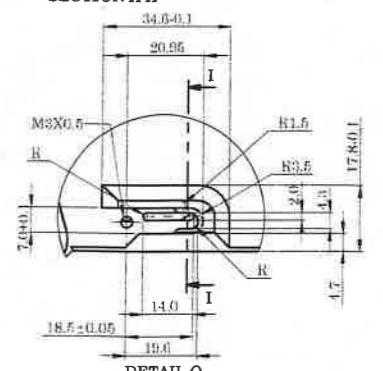

DETAIL Q  
SCALE 1:1

**NOTE:**  
 1. REMOVE ALL SHARP EDGES AND BURRS  
 2. ANGULAR TOLERANCE IS 30° OR OTHERWISE STATED.  
 3. MATERIAL: ALUMINIUM ALLOY TO DTD 5124 OR IS: 738:1983 Gd76528  
 OR ASTM B 221M-0.5 AL 7075 TEMPER T6511  
 4. BLACK HARD ANODIC COATING TO IS 6057:1988  
 COATING THICKNESS - 0.050-0.075 mm  
 COATING HARDNESS - 400-450 HV  
 IS 5523 ANODIC COATING TESTING

SR No	DATE	AUTHORITY	BRIEF RECORD	ZONE	CD	GO
DRN: AKASH			MATERIAL			SIGN
SIGN:	DATE: 24/08/2022	CHECKED:	SEE NOTES			
APPD:	DATE: 24/08/2022		PROTECTIVE FINISH:			
SEALED DATE:			SEE NOTES			
SHEET SIZE: A1	EST. MASS:	TITLE:	RECEIVER BODY			
SCALE: 1:2	492.0 gm					
DESIGN AUTHORITY: ARDE						
PUNE-411021						
ORG No. 2101 01 02 01 05 001 00DA						
IC SS S AA A C SST						
9 mm	PART No.	DS/CAT No.		AHSP		

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16