


SK-6536/TE

√ Rz 20 (M)

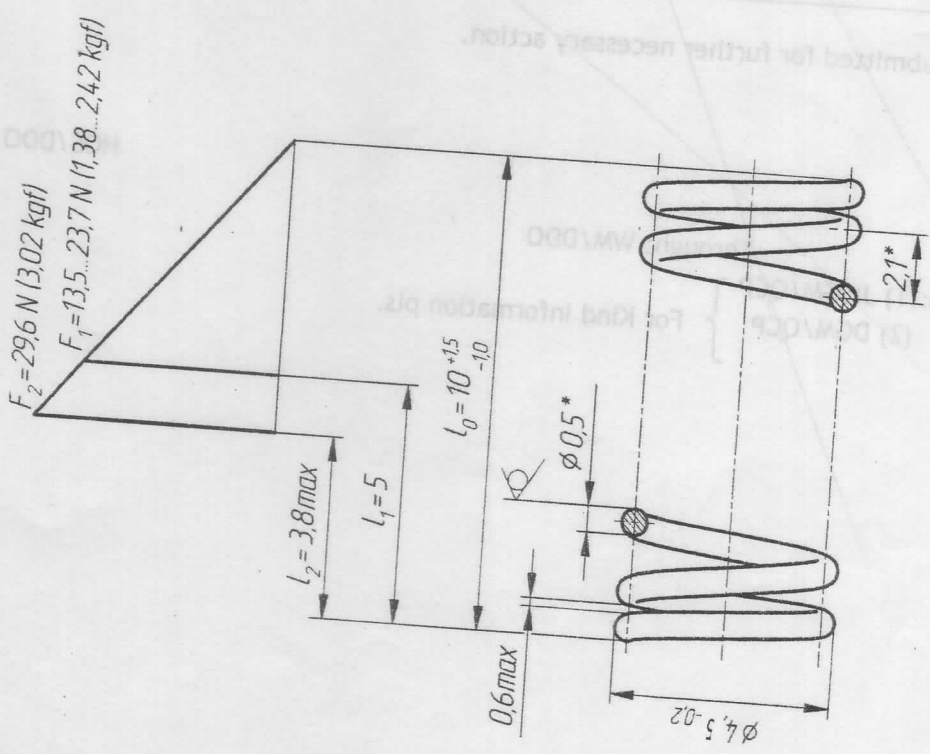

1051 mm
 Certified as correct copy
 of drg. no. 2510805
 Jr. Works Manager

- 1 $G^* = 78,4 \text{ GPa}$ (8000 kgf/mm²).
- 2 $\tau_3^* = 1,57 \text{ GPa}$ (169 kgf/mm²).
- 3 $l = 85 \text{ mm}$.
- 4 $n = 4$.
- 5 $n_r = 6 \pm 0,5$.
- 6 Tempering from 240 °C to 260 °C.
- 7 $D_r = 5 \text{ mm}$.
- 8 *Reference dimensions and parameters.
- 9 Prestress until coils come into contact. Prestressing time is not less than 24 hours.

Weight: 0,15 g	
DRAWN	SEEN BY
DATE	CHECKED
APPROVED	DATE
	7/08/2023
DRG. NO.	HOS/DDO
SK-6536/TE	
SHT. 1	OF 1

7.62x39mm AR-SAF

Spring

SMALL ARMS FACTORY
 KANPUR

SCALE
 N T S

Wire 1-0,56 GOST 9389-75