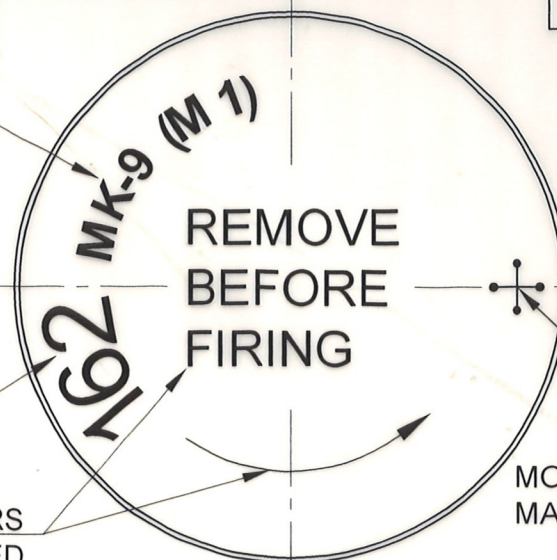
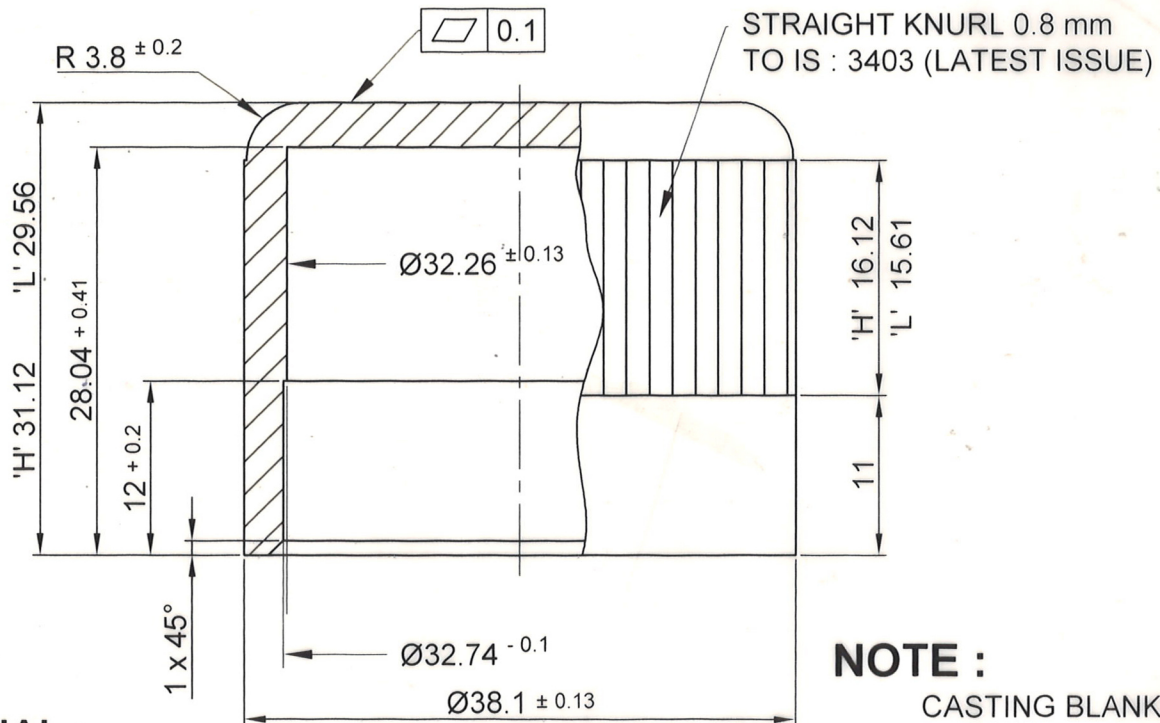


C - 2325

ALL DIMNS. ARE IN mm.

MK OF FUZE IN 2.5 TYPE
TO BE DEPRESSEDNo OF FUZE IN 5 TYPE
TO BE DEPRESSEDLEGEND IN 2.5 LETTERS
TO BE DEPRESSEDMONOGRAM OF FACTORY
MANUFACTURING SAFETY CAP**NOTE :**CASTING BLANKS
ARE TO BE PACKED IN
WAX PAPER**MATERIAL :**ZINC BASE ALLOY (DIE CASTING) TO SPECN. BS : 1004
(LATEST ISSUE) ALLOY 'A' OR SPECN. IS : 742 (LATEST ISSUE)
ALLOY ZnAl 4. CASTING MUST BE TO THE CURRENT ISSUE
OF SPECIFICATION DEF 17B(a) JAN.1969 CLASS-2

		SCHEDULE No.		COMPT. SAFETY CAP FOR FUZE 162 MK-9 (M1)	STORE DRG. No. IQX - 41 GE
		SCALE - 2:1	PROJECTION : THIRD ANGLE		
		DRAWN BY : D.K.DAS		DIE CASTING BLANK (FOR Fz 162 MK-9 SAFETY CAP)	PART No. : IQX - 14
		CHECKED BY :			
		APPROVED BY : 			
DRG. No. : C - 2325					
DT. & SIG.	DESCRIPTION	CONCURRED BY : JWM / FUZE		M / C:	No. OF SHEETS : 1
AMENDMENTS		DATE : 12/07/17	SIGN. : 	G & S FY. COSSIPORE	SHEET No. : 1