
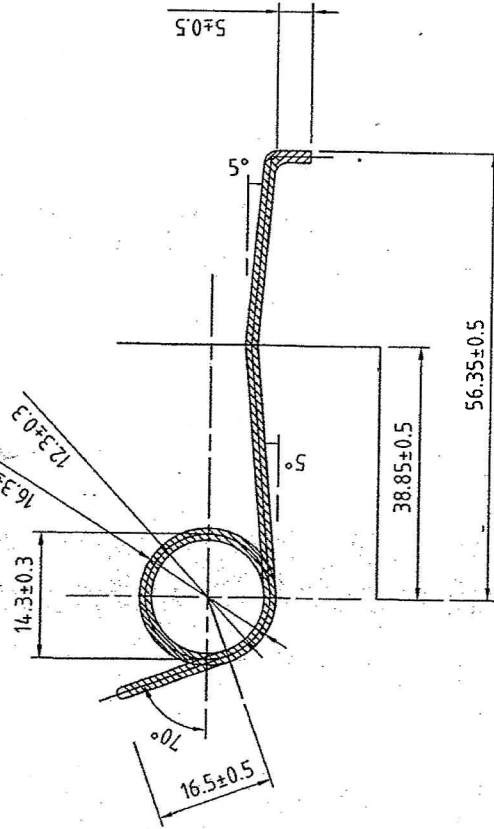


DRG. NO. K-2063

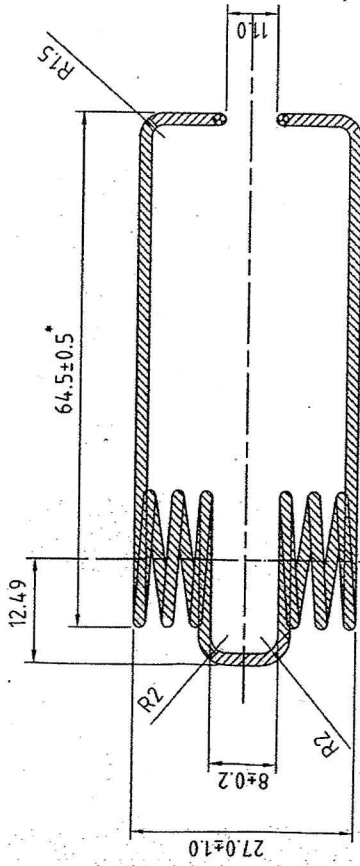

NOTE:

THREE STRANDS OF WIRE DIA - 0.9 MM
 NO OF EFFECTIVE COILS - 3+3
 WOUND AS SHOWN

* SIZES & PARAMETERS ARE GIVEN FOR REFERENCE
 PROTECTIVE FINISH :

PHOSPHATE TO SPECN JSS:0465-01:1994 CLASS-II
 (ACCELERATED) OIL FINISH

MATERIAL : IS: 4454, Pt.1,2001,Gr.SH.

ALT. MATL. : BS: 5216-1975,Gr.-4 CODE 'M'
 (OR) IS: 4454-2001, PART-1 GRADE 'DH'

STRESS RELIEVE: 200°C-240°C, 1Hr.

DIMENSIONS ARE IN mm.
 UNTOLERATED DIMNS. AS PER IS : 2102 (MED)
 MARK DRAWING No.

16/11/01
[Handwritten signature]

PART NO.		DESCRIPTIONS		NO OFF		MATERIAL		TREATMENT		REMARKS	
TRACED		SIGNATURE & DATE								SCALE	
DRAWN		✓								STORE DRG. NO. K-2063	
CHECKED		P. K. S.								OPERATION NO. ----	
OIC/D&DO		S. K. S.								DRG. No.: TAR-RB-K-2063	
OFFICER/PRODN.		S. K. S.								DES. REF. NO.	
OFFICER/D&DO										FOR: SUB: SPRING HAMMER, TRIGGER	
APPROVED ON .04.2011										OF: TRICHY ASSAULT RIFLE-RB-K	
AMENDMENTS										ORDNANCE FACTORY TIRUCHIRAPPALLI-16.	
SIG. & DATE										SHEETS: 1	
										SHEET No.: 1	