


Special 27.178 x 14 Thread - Class 2

$\phi 25$ MAX *

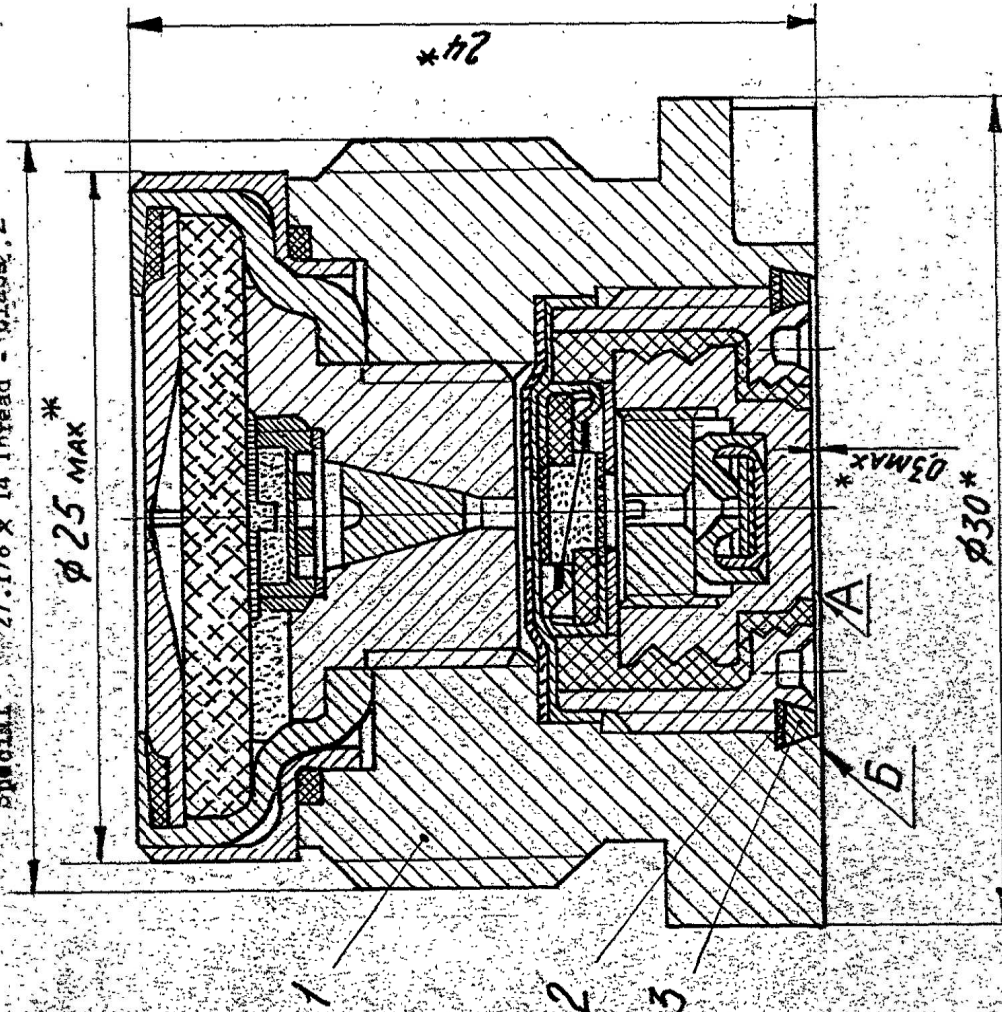

- * 1. Dimension for reference.
2. When press fitting parts 2 and 3 apply a force ensuring complete filling of circular groove.
3. Trim surfaces A and B to remove extruded material. Coat damaged pieces with varnish MA-592 diluted with petrol.
4. Filament resistance 1 to 3.6 Ohms.
5. Deformation of plastic and parts of assembly unit Cd.10 is not permitted

| No. | Designation | Nomenclature | Qty. | Remark |
|-------|----------------------|----------------------------------|------|--------------|
| 1. | Cd11 | primer | 1 | |
| 2. | 22 | Packing | 1 | |
| 3. | 23 | Ring | 1 | |
| | | Aviation petrol as per | | |
| | | GOST 1012 - 72. | | |
| | | Varnish MA -592 | | |
| | | TY 6-10-846-75. | | |
| APPD. | <i>Savvash</i> | 3-027321 | 482 | |
| | FOR CI(A) | COMBINATION CASE LITATION PRIMER | | |
| | AHSP:- C.I.(A)KIRKEE | TYB-7 for High pressure gun. | | CD |
| | | D.S. CAT NO | | |
| | | 1315-001025 | | |
| | | | | 2SHTS. SHT.1 |

| | | | | | |
|---------|---------------|----------------------|------|-------|------|
| 11-9-93 | RF-35581-A | D.S. CAT NO ADDED | | | |
| 4-6-85 | D.C.I-33760-A | DRAWING SEALED PROJ. | | | |
| DATE | AUTHORITY | REVISION | ZONE | AHSP. | D.O. |
| | | | | | SG |