


DIMENSIONS ARE IN MM.

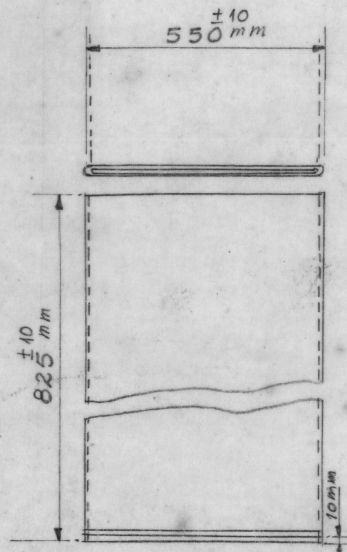

NOTES :-

- * MATERIAL TO BE USED 0.127 mm ± 0.005 mm (500 GAUGE ± 5 GAUGE)
- # ⊕ * TUBE OF POLYTHENE TO SPECN JSS 9330-03-1995-DC 3490 - ME DATED 14-01-98 (LOW DENSITY POLYETHYLENE GRADE A TYPE - I)
- * TUBE TO BE DOUBLE HEAT SEALED 10 mm FROM BOTTOM END POSITION.
- * CAPACITY OF EACH BAG - 25 KGS. HEXAMINE ONLY. LENGTH - 825 ± 10 MM WIDTH - 550 ± 10 MM

| SL NO | DATE | DESCRIPTION | SIGN. |
|-------|------------|--|--------|
| 3 | 24.02.2010 | # TUBE OF POLYTHENE TO SPECN CHANGED FROM JSS 9330-03-1995-DC 3490-ME DTD. 14.1.1998 (L.D.P.GD. A TYPE-1) TO JSS 9330-03-2007 (REV. NO 2) (LOW DENSITY POLYTHYLENE TYPE-I) | DVO/ID |
| 2. | 11.12.08 | ⊕ TUBE OF POLYTHENE TO SPECN CHANGED FROM JSS 9330-03-1995-DC 3336 - ME DTD: 15.09.95 TO JSS 9330-03-1995-DC 3490-ME DATED: 14.01.98. ⊕ GRADE A DELETED | DVO/ID |
| 1 | 26-11-94 | TOLLERENCES ARE ADDED IN NOTES. | DVO/ID |

| | |
|----------------------------|---------------------|
| ORDNANCE FACTORY BHANDARA | |
| BAG POLYTHENE FOR HEXAMINE | |
| DATE:- 16.XI.75 | SCALE:- N.T.S. |
| DRN:- <i>Bhasker</i> | DRG. No:- |
| TCD:- | O.F.BA'HEX'30 |
| CKD:- | FINAL APPROVAL |
| APPROVED BY | <i>P.N. Chavhan</i> |
| | GENERAL MANAGER |