

1

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20


MATERIAL: DTD 5044 OR DTD 5124
HARDNESS: 110 HB - 130 HB (10/500)
PROTECTIVE FINISH: ANODIZING AND DYING.

SYMBOL NOTE:
O = SYMBOL INDICATES THE DIMENSIONS OF LOCATING SURFACES WHICH ARE SITUATED ON THE SAME LEVEL, BUT WHICH ARE MACHINED WITH MORE THAN ONE OPERATION.

P.H. = PLANE OF HORIZONTAL.
P.V. = PLANE OF VERTICAL.
P.T. = PLANE OF TRANSVERSE.

SURFACE FINISH: -
AS PER IS: 3073
WHERE NOT SPECIFIED SHOULD BE V

MANUFACTURER'S CODE } LETTER SIZE 52 mm
Yr. of Manufacture }
Certified as correct copy
of dry. on... 21.6

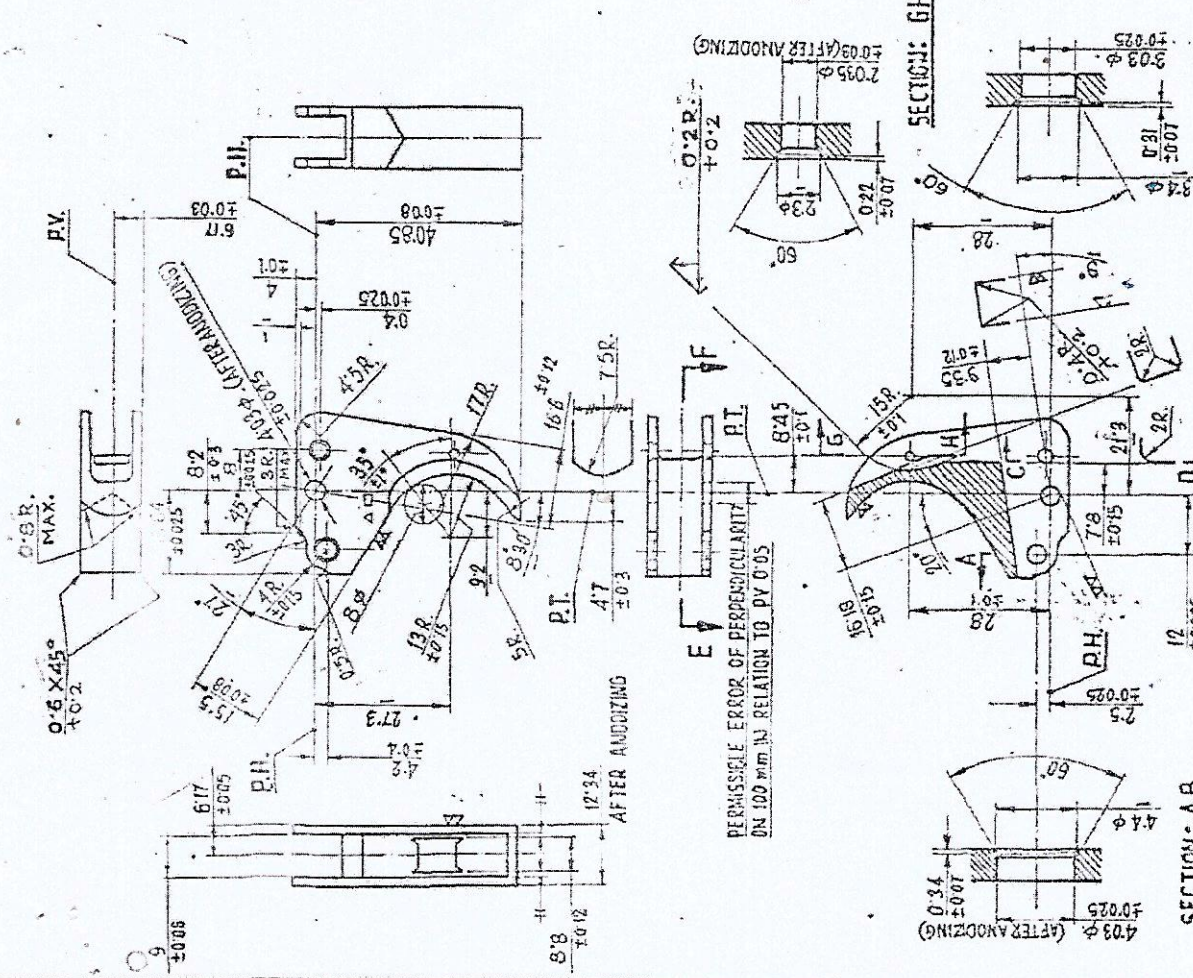

PERMISSIBLE ERROR OF PERPENDICULARITY ON 100 mm IN RELATION TO PY 0.05

26752-5A03-04-15	1-16/11	MFG'S CODE & Yr OF MFG ADDED	350
25743-25-04-2002	2002	RECORD OF RECEIPT CANCELLED AND DRG. CANCELLED	
23630-64-23-12-96	23-12-96	WORK SURFACE FINISH SPECIFICATION SYMBOL NOTE ADDED & MACRO ETCH TEST DELETED.	0.4C
22283-5A 84-9-93	84-9-93	NOTE FOR MACRO ETCH TEST AND NIMR TEST ADDED.	MS
21794-22-6-92	22-6-92	NEG. RE-TRACED & DRG. RE-VALUED AS SECOND OF RECEIPT & ADDRESS AMENDED.	
		PREVIOUS DC U NOS. 15594-SA, 17027-SA, 21309-SA, 21672-SA, (COP)	
AUTHY.	DATE	ZONE	BRIEF RECORD
DGN	DATE	NAME	SUB ASSY. D.S. CAT NO
DRN			1005-006652
CHO			MATERIAL: AS STATED.
T60 (S.S. 316)			DIMENSIONS ARE IN MILLIMETRES
COIN (S.S. 316)			
BY: P. C. 93 JCT. DO.			
SCALE: 1:1, 4:1			
SEALED: D.C. NO.			
25343-5A			
DT. 26-04-2002			

BODY TRIGGER

SECTION: CD

SECTION: EF

SECTION: AB

SECTION: GH

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z