IMPD-0982

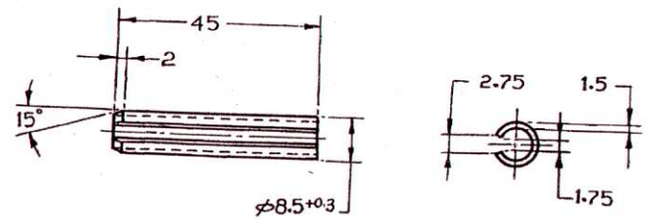

ADAPTOR SLEEVE 8×45
[ADAPTOR ϕ8×45 mm LONG]

MATL:- GERMAN MATL AND SPEC :- 55 Si 7 HEAT TREATED
ALTERNATIVE MATL AND SPEC :- BS 1449 EN 42 G, 42 J, 44 D, 44 E

NOTE :-

1. HARDNESS BETWEEN VPN 442 TO 512.
2. GALVANISED AND CHROMATIZED TO 20 - 30 μ.
3. TENSILE STRENGTH 140 TO 180 kg/mm².

COPY ISSUED
यह प्रति ... द्वारा की गई है।
Remarks :
Date 28/4/14

DRG BASED ON ISK-0355 DS No. 14/5420-000153

DRN		DRG NOT TO BE SCALED.	PERTAINS TO
TCD	S M BAKSHI	ALL SHARP EDGES & CORNERS TO BE ROUNDED OFF.	IMSA-0167&0168
CHD	SL	ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED.	
PSD	O/M ACIE(DRG)	NOMENCLATURE	
APPD		AS STATED	IMPD-0982
DATE	23/11/10		
TOLERANCE UNLESS OTHERWISE SPECIFIED GEN / DEC / ANG — — —		SCALE:- 1:1	
		CONTROLLERATE OF INSPECTION ENGINEERING EQPT.	

DC(I)	DATE	ZONE	BRIEF RECORD	SIG