


909000-9001 ON
D.S. CAT. 1005-000606

DRAWING CONVENTIONS CONFORM TO JSG:0104.
DIMNS. ARE IN mm.

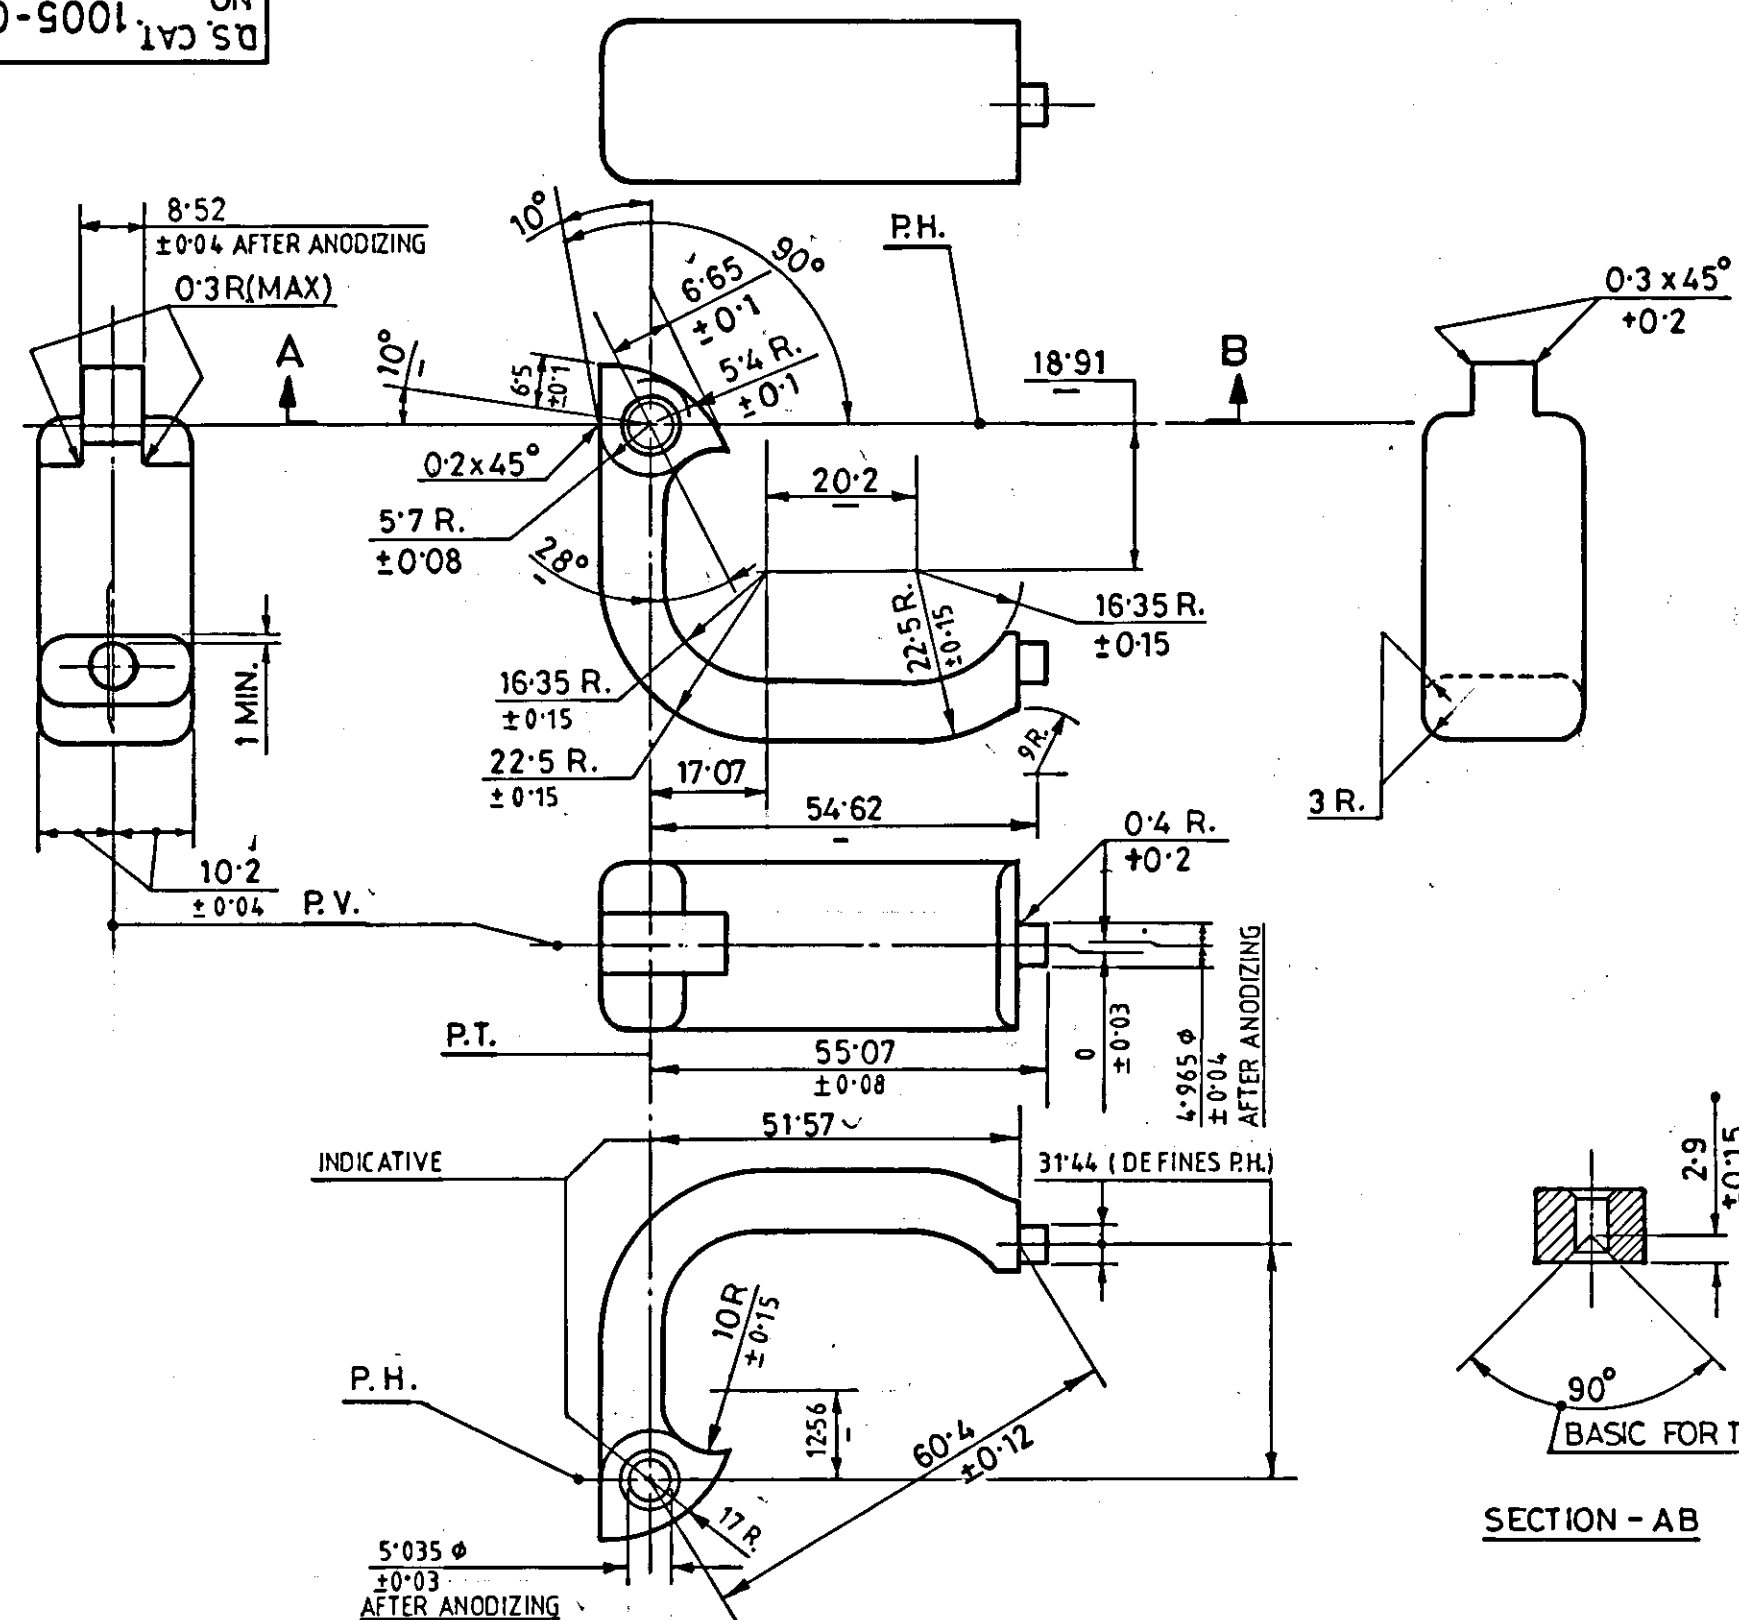

ALLOWED DEVIATION FOR
P.V. ± 0.03
P.H. ± 0.03
P.T. ± 0.03

ABBREVIATION :-
P.V. = PLANE VERTICAL
P.H. = PLANE HORIZONTAL
P.T. = PLANE TRANSVERSE

NOTE :-
MARKING SUITABLY ON SAMPLE
YEAR OF MANUFACTURE
MANUFACTURER'S CODE
D.S. CAT. NO.

SECTION - AB
160 EVERYWHERE

				DRN.	CHD.	TRD. <i>[Signature]</i>	COMP. <i>[Signature]</i>	AHSP CQA(SA), ICHAPUR
				SCALE:- 1:1		EST. MASS		ASSY. 1005 - 006847
				DT. 23-02-07	<i>[Signature]</i> I/C;D.O.	APPROVED DT. NEG. RE-TRACED		
23-02-07	26298-SA	PROFORMA CHANGED, NEG. RE-TRACED AND DRAWING RE-SEALED.		<i>[Signature]</i> CD	<i>[Signature]</i> JSG	MATERIAL:- ALLUMINIUM ALLOY TO SPECN.BS 1472 HF 15		D.G.N.R.'S REF.
		PREVIOUS DC.NOS. 20856-SA, 21685-SA, 23242-SA, 25310-SA.		COPY	COPY	H.T./HARDNESS:- ≥ 110 HB (10/500) (130 H.V.)		PART NO. 105
DATE	AUTHY	BRIEF RECORD		ZONE	I/C;D.O.	SIGN.		DRG. NO. A 1393
SEALED :- D.C. NO. 25310-SA DT. 30-03-2002								D.S. CAT. NO. 1005-000606
NOMENCLATURE :-		TRIGGER GUARD			PROTECTIVE FINISH :-		ANODIZING AND DYING	