

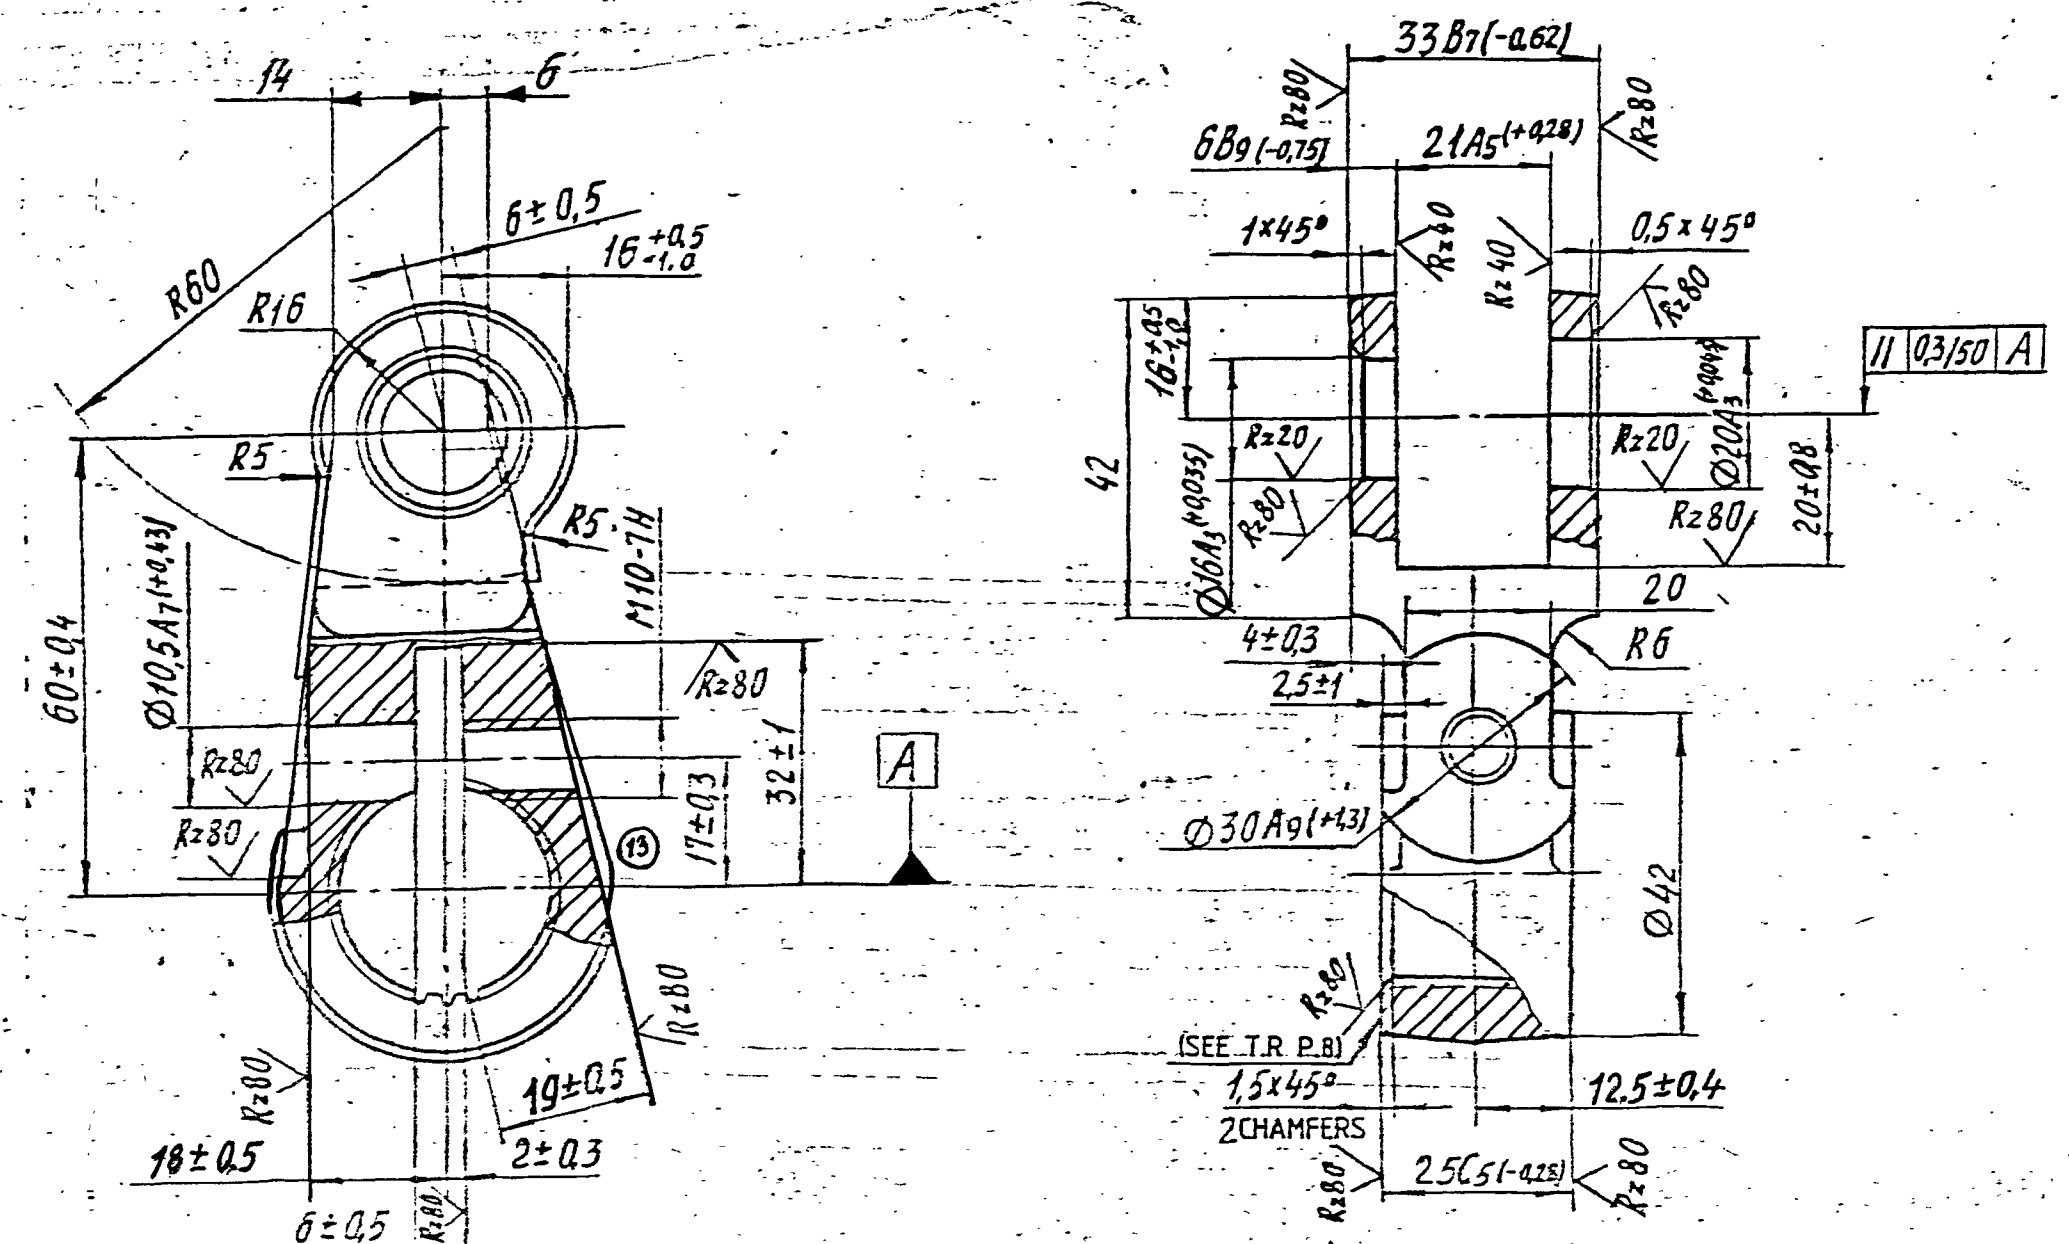


DRAWING NUMBER
175 64 058

✓(✓)

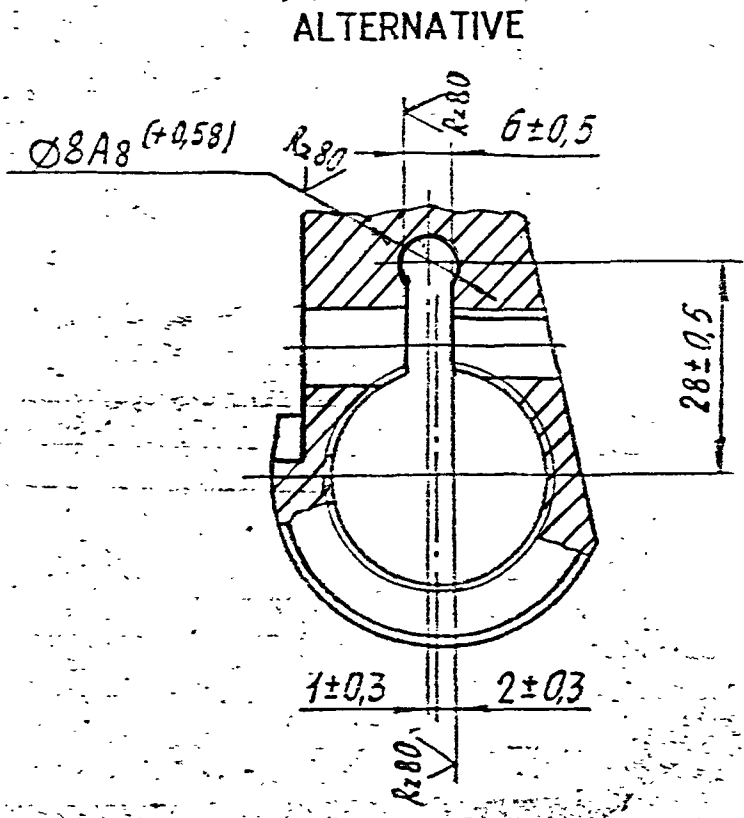

TEETH PROFILE
SCALE 5 : 1

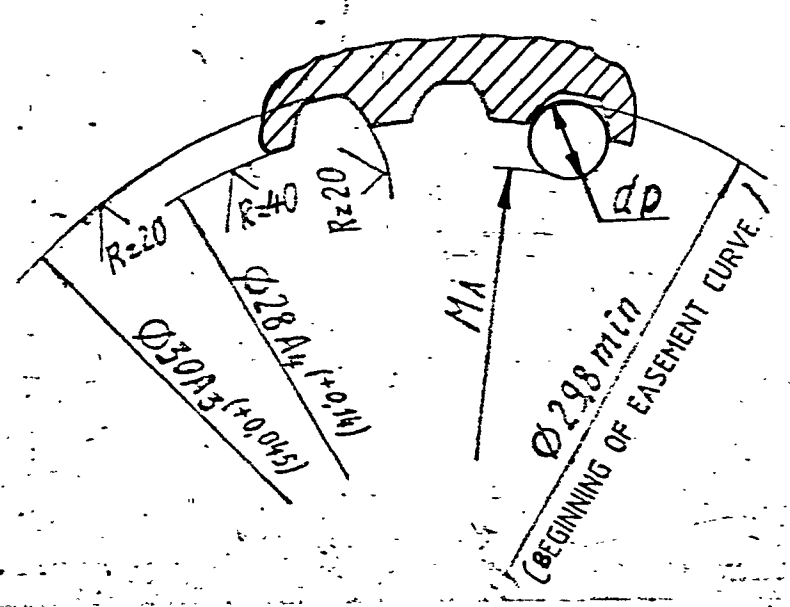

1. BHN 302-255 (IND. DIA 3.5 - 3.8) TO BE CHECKED IN BLANK.
2. EXTERNAL DRAFTS SHOULD NOT EXCEED 7° UNSPECIFIED RADII- 3mm.
3. PERMISSIBLE DEVIATIONS OF ROUGH DIMENSIONS ARE AS PER GOST 7505-74 CLASS II
4. NON SQUARENESS OF THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 RELATIVE TO THE PLANE OF SLOT HAVING DIMENSION 21A5 IS TO BE CHECKED BY FREE ROTATION OF A RING WITH A THICKNESS OF 20.4mm AND DIAMETER OF 35mm ON STEPPED SHAFT ϕ 16X AND ϕ 20X.
5. THE SPLINES SHOULD BE POSITIONED IN SUCH A WAY THAT THE PLANE OF SYMMETRY OF THE TOOTH SPACE COINCIDES WITH THE PLANE PASSING THROUGH THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 AND THE AXIS OF HOLE ϕ 28A4 DEVIATION NOT EXCEEDING 1° IS ALLOWED.
6. THE SPLINES ARE TO BE CHECKED WITH A COMPLEX PLUS GAUGE, MADE TO MAXIMUM DIMENSIONS OF MATING COMPONENT BEFORE CUTTING THE SLOT OF DIMENSIONS 6.
7. MACHINING AS PER THE DOTTED LINE IS ALLOWED.
8. ON THE FACE OF THE GUIDE ALONG THE AXIS OF SYMMETRY OF TOOTH SPACE OF SPLINE PASSING THROUGH THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 AND AXIS OF HOLE ϕ 28A4 A MARK OF A LENGTH EQUAL TO THE WALL THICKNESS AND OF A DEPTH AND WIDTH OF 0.5+0.5mm IS TO BE MADE.
9. THE REMAINING REQUIREMENTS ARE IN COMPLIANCE WITH 520 SPEC 1.
10. IN HOLES ϕ 16A3 AND ϕ 20A3 WITH SURFACE ROUGHNESS R_{a20} TOOL MARKS ARE ALLOWED.

CONVENTIONAL DESIGNATION OF HOLE AS PER GOST 6033-51	9B 30x1x28A3S4	
MODULE	m	1
NUMBER OF TEETH	Z	28
DIAMETER OF PIN	dp	2.02
DISTANCE OVER PINS	MA	25.655 ^{+0.180} _{+0.072}
WIDTH OF TOOTH SPACE ALONG THE CHORD OF REFERENCE CIRCLE	Sj	2.147 ^{+0.10} _{+0.04}
DIAMETER OF REFERENCE CIRCLE	Id	28

PILOT SAMPLE SHOULD BE APPROVED BY A H S P BEFORE BULK PRODUCTION.

EST. WT. 0.34 Kg
TO BE STAMPED OR MARKED WHERE INDICATED THIS # (LETTERS)
ALL SHARP EDGES AND CORNERS TO BE REMOVED UNLESS OTHERWISE STATED MACHINED CORNERS TO HAVE R OUTSIDE R INSIDE EQUIVALENT CHAMFERS ARE PERMISSIBLE.

DRN	CHD	TCD	APPD	DATE	SCALE	DIMENSIONS IN mm.	TOLERANCE ON DIMNS UNLESS OTHERWISE STATED IS 2102-69	ALL THREADS TO CONFORM TO
				24-08-88	1:1			
MATERIAL :- STEEL 38XC GOST 4543-71.					USED ON :- 175 64 025 Cb			
CONTROLLERATE OF QUALITY ASSURANCE (HEAVY VEHICLES)					A V A D I			
TITLE					GUIDE			
D S CAT NUMBER					DRAWING NUMBER			
15 15-1-89. Amdt. List 6/II. Book-9.					175 64 058			
ISSUE	DATE	NATURE OF AMENDMENTS						

INDIANISED DRAWING PREPARED BASED ON ISSUE 14.

COMPLETING ARTICLES SHOP (69)
Vendor Qualification Criteria (VQC)

ENCLATURE & DRAWING No.: GUIDED to Drg. No. 175.64.058, LF No. 6206420118

1	2	3	4	5	6
FACTURING TECHNOLOGY & INSPECTION FACILITIES REQUIRED TO PRODUCE THE ITEM		MUST BE POSSESSED BY THE VENDOR IN HIS OWN PREMISES - (P&M LIST & TESTING/INSPECTION EQUIPMENT LIST TO BE SUBMITTED)	PROVIDE DETAILS OF THE FACILITIES ASKED IN COLUMN (3) THAT ARE AVAILABLE IN-HOUSE (SELF-DECLARED P&M LIST • (Nomenclature of machine, Make/Model, Capacity/Size & accuracy, Date of Installation, Vintage of machine/Vear of Manufacturing of machine) AND TESTING/INSPECTION EQUIPMENT LIST (Nomenclature of the Testing/Inspection Equipment, Make/Model, Size & Range, Date of calibration) ALSO TO BE SUBMITTED)	MAY BE POSSESSED BY THE VENDOR IN HIS OWN PREMISES OR OUT SOURCED - (MOUT/TE-IP WITH THE OUTSOURCING VENDORS/SUB-VENDOR AND THEIR P&M LIST & TESTING/INSPECTION EQUIPMENT LIST TO BE SUBMITTED)	PROVIDE DETAILS OF THE FACILITIES ASKED IN COLUMN (5) THAT ARE AVAILABLE IN-HOUSE OR OUT-SOURCED FIRMS (NAME AND ADDRESS OF THE OUTSOURCING VENDOR TO BE DECLARED BY THE FIRM IN FIRM'S LETTERHEAD, SELF-DECLARED P&M LIST • (Nomenclature of machine, Make/Model, Capacity/Size & accuracy, Date of Installation, Vintage of machine/Vear of Manufacturing of machine) AND TESTING/INSPECTION EQUIPMENT LIST (Nomenclature of the Testing/Inspection Equipment, Make/Model, Size & Range, Date of calibration) AND MOUT/TE-IP ALSO TO BE SUBMITTED)
Technology 1 STEEL FORGING				Forging: 175.64.058, Est.: 0.88kg.	
Technology 2 HEAT TREATMENT				Normalizing & Hardening 302-255 BHN.	
Technology 3 SURFACE CLEANING				Shot Blasting	
Technology 4 *MACHINING		Conventional/CNCVMC/ HMC Bed Cap. 297x242mm Min.			
Technology 5 BROACHING				Spline Broaching to Module - 1	
Technology 1 TESTING MACHINE				Brinell Hardness Tester	
Technology 2 MEASURING INSTRUMENTS /GAUGES		Required Measuring Instruments/Suitable Standard Gauges.			

MEASURING GEOMETRICAL ACCURACY tion 3	3D/CMM Table working area 500 x 500 mm min.
TESTING MACHINE tion 4	Spectroscope/NABL Certified lab report for Chemical composition, Mechanical properties specified as per material produced.

ic: (1) Facilities must be available with vendors own premises - including facilities available with Sister / Parent Concerns / Strategic Partners shall be Considered for Capacity Verification subjected to documentary evidence to prove the relationship / ownership.

(2) *The firm may indicate the alternate machines/process by which the component can be manufactured as per technical specification/drawing. ** Firm should give undertaking that they will develop the all the testing facility if they get order.

(3) Firm should be capable to arrange the raw material like forging material as per drawing & specification.

(4) Firm should be capable to arrange Suitable Furnace for carrying out Hardening and Tempering.

[Signature]
 ANTARYAMI PRADHAN
 JWM/QA(OE)(CA)

[Signature]
 LAKSHMINARAYANAN.C
 JWM/CA

[Signature]
 M. GNANASEKARAN
 DGM/CA

**RESTRICTED
(DRAFT/PROVISIONAL)
QUALITY ASSURANCE PLAN**

FOR

(GUIDE)

DRG.NO. 175.64.058

(LF NO: 6206420118)

No HVF/T-72C/QAP/64/GUIDE/242667 - 00

ISSUE No: 00

DATE: NOV- 2021

QUALITY ASSURANCE (RIG-SUB ASSEMBLY)

HEAVY VEHICLES FACTORY

AVADI CHENNAI - 600 054

QUALITY ASSURANCE PLAN (QAP)

FOR


GUIDE

DRG. NO. 175.64.058


PREPARED BY


(C.NANDA KUMAR)
JWM/QA (RIG-SA)

REVIEWED BY


(HANUMANTHA RAO GOLLA)
JWM/QA (RIG-SA / TA)

APPROVED BY


(SUBHAM BIJLWAN)
AWM/QA-RIG-(SA)

ISSUED BY

QUALITY ASSURANCE (RIG- SUB ASSEMBLY)
HEAVY VEHICLES FACTORY
AVADI CHENNAI – 600 054

Sl. no	CONTENTS	PAGE .No.
1.	IMPORTANT NOTES	4
2.	INTRODUCTION	4
3.	AIM	4
4.	SCOPE	5
5.	DOCUMENTS	5
6.	ITEM USED ON	6
7.	LIST OF DRAWINGS	6
8.	BILL OF MATERIAL	6
9.	CONDITIONS OF USE/ STORAGE INSTRUCTIONS	6
10.	SAMPLING PLAN	7
11.	VISUAL INSPECTION	7
12.	DIMENSIONAL CHECKS	8
13.	MATERIAL CHECKS	8
14.	ACCEPTANCE / PERFORMANCE TESTS	9
15.	FITMENT AND PERFORMANCE TEST	10
16.	INTERCHANGEABILITY	11
17.	CALIBRATION CHECKS	11
18.	MARKING/IDENTIFICATION	11
19.	PRESERVATION CHECK	11
20.	PACKING CHECK	11
21.	DOCUMENTATION	12
22.	REFERENCE	12
23.	ANNEXURE-A	13
24.	FIGURE	14
25.	APPENDIX-A	15

1.IMPORTANT NOTE

Note-1

This is only a provisional and will be amended from time to time according to the requirement. No addition, deletion and reproduction will be done without permission of The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 54.

Note –2

Any instruction contained in this does not prejudice the terms and conditions of the contract what so ever. In case of any contradiction between the contents of this QAP and the clause in the contract, the latter will prevail.

Note-3

The stores should be manufactured strictly only as per the drawings supplied by the Inspection Authority and not as per the samples, if any received by the manufacturer for guidance purpose.

Note-4

Any amendment issued by the Inspection Authority shall be incorporated in the QAP and the records for the amendments carried out should be maintained as per the Performa at Appendix-“A”.

Note-5

In case of any contradiction between the contents of this QAP and drawings issued along with the contract, the latter will prevail.

2.INTRODUCTION

1. This quality plan lays down the inspection and testing procedure to be carried out on the component **GUIDE TO DRG.NO 175.64.058** being procured indigenously. This is prepared, based on the acceptance standards and inspection parameters laid down in collaborators documents and on the inspection test standards followed in respect of similar indigenous items.
2. This QAP is the property of Government of India and is liable for amendments as and when required. The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054, is the inspecting Authority for this assembly. Any query / clarification on the content of this QAP shall be referred to this Factory. Any departure from these instructions is allowed only after written approval from the above authority. Notwithstanding the tests indicated in this QAP, the inspecting Officer has the right to carry out any test to check conformance to the paper particulars quoted in the Supply Order, which he may consider necessary to satisfy himself about the stores which he has to accept.

3.AIM

The QAP is aimed at standardizing the Inspection procedure and acceptance norm for **GUIDE TO DRG.NO:175.64.058**.

It also aims at giving adequate information to the manufacturer on the quality requirements so that the required quality control methods are established. This is also meant to guide authorized Inspection Officer in his routine inspection and to set out main points to which his attention must be drawn to ensure that the accepted stores meet the stipulated standards.

4. SCOPE:

This QAP outlines in general terms, the checks and methods to be used during inspection of **GUIDE TO DRG. NO. 175.64.058** including the technical requirements of the drawings. The recommended Quality Plan stipulated herein is mandatory and should be strictly adhered to.

For inspection purpose, only the latest issue of this QAP will be made applicable and copies of this QAP can be obtained from the issuing authority i.e. The Sr. General Manager, Heavy Vehicles Factory, Avadi, and Chennai.

NOTE-I:

- i. Tender enquiry (TE) and supply order (S.O) will be issued with QAP stating that inspection will be done as per QAP.
- ii. In case of TE, It is responsibility of the vendor to obtain the copy of QAP and give the statement of compliance that vendor will abide by the QAP in case supply order is placed.
- iii. In case of S.O, it is the responsible of the vendor to obtained copy of QAP and give the statement of compliance that the vendor will follow QAP. However, GM/HVF reserves the right to revise/update the QAP from time to time.

5. DOCUMENTS:

- a) On placement of firm supply order, One set of relevant specification and technical instructions on the subject item can be obtained by the contractor from AHSP through DDO/HVF
- b) Any clarification required on these documents should be obtained from the Inspecting Authority i.e. The Sr. General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054. Equivalentents to the collaborators specifications and standards will be decided only by the Inspecting Authority and should not be unilaterally decided. For any change in the specifications, standards or written approval, any alterations in specification can be affected and not otherwise.
- c) The process instruction sheets supplied by the collaborators are available with the Authority Holding Sealed Particulars, i.e. The Controllerate of Quality Assurance (Heavy Vehicles), Avadi, Chennai for the reference. The relevant process sheets may be studied at the premises of the AHSP after obtaining necessary permission.
- d) The supplier after scrutiny of the concerned process sheets and connected paper particulars should establish the necessary production and inspection facilities. Particularly the inspection test rigs, stands, fixtures, template, gauges

etc should be provided as recommended in these process sheets. If process sheet / Process Book is not available the details particulars/parameters available in the drawings to be strictly adhered.

6. ITEM USED ON:

1. 175.64.025CB - GUIDE.

7. LIST OF DRAWINGS:

SI. NO.	DRG. NO	NOMENCLATURE	REMARKS
1	175.64.058	GUIDE	-

8. BILL OF MATERIALS: (Individual items as mentioned in table to Para 7)

SI. NO	DRG. NO	NOMENCLATURE	MATERIAL SPECIFICATIONS	Qty
1	175.64.058	GUIDE	STEEL 38XC GOST 4543-71	1

Note: Vendor / Contractor may use approved alternate material if any specified in drawing/ specification. * Also refer Para no.13.

9. CONDITIONS OF USE/STORAGE INSTRUCTIONS

This assembly/item should be properly packed to protect from transit / handling damage and influence of atmospheric precipitations. In addition, the following parameters should be ensured:

- (a) The threaded parts if any should be covered with suitable plastic caps to prevent damages.
- (b) If the item consists of assemblies, each assembly should be packed separately.
- (c) The stores are to be suitably covered for preventing ingress of dust and Dirt/entry of sunlight / moisture.
- (d) The packaging slip shall contains
 - (i) Certificate of testing- NABL Certificate.
 - (ii) Guarantee/ Warranty Certificate
 - (iii) Service and maintenance instructions
 - (iv) Delivery Slip with Inspector's Acceptance Mark
 - (v) Undertaking letter / certificate of conformance.
- (e) The stores are not permitted to be stored together with oils. Petrol, acids, alkaline and other substances to avoid damage to the metal / rubber components.

10. SAMPLING PLAN:

Sl. No.	Sampling Plan	Pilot	Bulk
(i)	Visual Inspection	100%	100%
(ii)	Dimensional Inspection	100%	General Inspection level III, single sampling, Normal Inspection, AQL 2.5 of IS 2500 (Part-I)-2000
(iii)	Material Inspection	1 No	1 No. for each batch of raw material or heat treatment lot as required by specifications.
(iv)	Acceptance test	100 %	100 %
(v)	Pressure testing	-----	-----
(vi)	Machining/Fitment/ Performance trial on higher assembly / Tank	01 Nos.	01 Nos. per batch/As required.
vii)	Interchangeability Test	02 Nos.	02 Nos. per batch on randomly basis, except selective assembly.
viii)	Test stand/Jigs/ Fixtures/Gauges/Man drels/etc.	100 %	100 %
ix)	Marking/Identification	100%	100%
x)	Packing/ Preservation	100%	100%

Note:-

A New (First time supplier of this item) supplier should obtain clearance from HVF for bulk production which will be issued only after inspection/evaluation of pilot samples by HVF.

11. VISUAL INSPECTION[Sampling plan as per Para- 10 (i)]

The stores are to be visually examined on 100 % of pilot /bulk and same should be free from any defects and all the finishing requirements shall satisfy as indicated in technical conditions of the assembly / component drawing.

The components shall be checked for the following and should be free from the defects:

- Defects in construction
- Cracks/Dents/Scratches
- Fitment of all components
- Presence of foreign particles
- Moisture and dust
- Corrosion of metal parts

- Mechanical imperfections & distortion
- Any form of deterioration of material and finishing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

12. DIMENSIONAL CHECK [Sampling plan as per Para- 10(ii)]

The dimensions of individual component, sub assembly and major assembly shall be checked and ensured as per respective drawing. Dimensional check should be carried out as per sampling plan. However, the inspecting authority/rep. may at his discretion, tighten the inspection level and acceptance quality level on the critical items and adopt check point during manufacture.

12.1 GUIDE TO DRG.NO 175.64.058

1. All dimensions should be confirmed as per drawing.
2. Surface finish/Roughness should be confirmed as per drawing and specification.
3. Refer drawing / specification for admissible alternate manufacture in dimensions/material if any specified for the component.

13) MATERIAL CHECKS [SAMPLING PLAN AS PARA – 10 (iii)]

Material specimen /test bars of the components shall be in conformity as per the material mentioned in the relevant documents/drawing. NABL test reports for all the parameters as per relevant specifications to be submitted. Test samples to be submitted by the vendor to HVF, if required. The material check will be carried out as per sampling plan.* However, if the manufacturer proposes any alternative material at the stage of tender enquiry, the same has to be approved and a written concurrence should be obtained from AHSP through DDO/HVF, before usage of such materials.

13.1 GUIDE TO DRG.NO.175.64.058

a) The component should be manufactured from STEEL 38XC GOST 4543-71.

b) **Chemical properties:** As per STEEL 38XC GOST 4543-71.

Grade	CONTENT OF ELEMENTS%							
	C	Si	Mn	Cr	S	P	Cu	Ni
					MAX			
38XC	0.34 to 0.42	1.00 to 1.40	0.30 to 0.60	1.30 to 1.60	0.035	0.035	0.30	0.30

Note: For mass fraction of other elements refer GOST 4543-71.

c) **Mechanical properties:** As per STEEL 38XC GOST 4543-71.

Grade	Yield point, (kgf/mm ²)	Ultimate strength, (Kgf/mm ²)	Elongation %	Relative reduction of area %	Impact strength (Kgm/cm)
	Not less than				
38XC	75	95	12	50	7

Note: For other properties refer GOST 4543-71

14) PERFORMANCES / ACCEPTANCE TEST: GUIDE TO DRG.NO:175.64.058

1. BHN 302-255 (IND.DIA 3.5 - 3.8) TO BE CHECKED IN BLANK.
2. EXTERNAL DRAFTS SHOULD NOT EXCEED 7° UNSPECIFIED RADII - 3mm.
3. PERMISSIBLE DEVIATIONS OF ROUGH DIMENSIONS ARE AS PER GOST 7505-74 CLASS II
4. NON SQUARENESS OF THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 RELATIVE TO THE PLANE OF SLOT HAVING DIMENSION 21A5 IS TO BE CHECKED BY FREE ROTATION OF A RING WITH A THICKNESS OF 20.4mm AND DIAMETER OF 35mm ON STEPPED SHAFT ϕ 16X AND ϕ 20X.
5. THE SPLINES SHOULD BE POSITIONED IN SUCH A WAY THAT THE PLANE OF SYMMETRY OF THE TOOTH SPACE COINCIDES WITH THE PLANE PASSING THROUGH THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 AND THE AXIS OF HOLE ϕ 28A4 DEVIATION NOT EXCEEDING 1° IS ALLOWED.
6. THE SPLINES ARE TO BE CHECKED WITH A COMPLEX PLUG GAUGE, MADE TO MAXIMUM DIMENSIONS OF MATING COMPONENT BEFORE CUTTING THE SLOT OF DIMENSIONS 6.
7. MACHINING AS PER THE DOTTED LINE IS ALLOWED.
8. ON THE FACE OF THE GUIDE ALONG THE AXIS OF SYMMETRY OF TOOTH SPACE OF SPLINE PASSING THROUGH THE COMMON AXIS OF HOLES ϕ 16A3 AND ϕ 20A3 AND AXIS OF HOLE ϕ 28A4 A MARK OF A LENGTH EQUAL TO THE WALL THICKNESS AND OF A DEPTH AND WIDTH OF 0.5+0.5mm IS TO BE MADE.

9. THE REMAINING REQUIREMENTS ARE IN COMPLIANCE WITH 520 SPEC 1.
 10. IN HOLES $\phi 16A_3$ AND $\phi 20A_3$ WITH SURFACE ROUGHNESS R_{a20}
 TOOL MARKS ARE ALLOWED.

OTHER DETAILS:

CONVENTIONAL DESIGNATION OF HOLE AS PER GOST 6033-51	$\exists B 30 \times 1 \times 28 A_3 S_4$	
MODULE	m	1
NUMBER OF TEETH	Z	28
DIAMETER OF PIN	d_p	2.02
DISTANCE OVER PINS	M_A	$25.655^{+0.180}$ $+0.072$
WIDTH OF TOOTH SPACE ALONG THE CHORD OF REFERENCE CIRCLE	δ_j	$2.147^{+0.10}$ $+0.04$
DIAMETER OF REFERENCE CIRCLE	Πd	28

15) FITMENT AND PERFORMANCE TEST:

- Pilot samples should be checked for fitment and Performance test to ascertain the efficacy of the system under different operating conditions by fitting in higher assembly and repeating it for functional checks, wherever required.
- Items of Bulk supplies may be subjected to performance trial in tank in case of repeated failure/defects during exploitation.

EXPLANATORY NOTE:

- Stage wise process and inspection of the component as specified in TD Book/ Process Book/ illustration book/specification is to be confirmed by the supplier during manufacturing the components.
- Firm shall submit details of manufacturing process, inspection process and also reports for the same to HVF.
- If required/applicable HVF shall witness/verify stage wise inspection /process details during manufacturing of the components.
- The component may be subject to endurance test, when fitted in higher assembly as specified in process / illustration /TD book.

16) INTERCHANGEABILITY:

The assemblies/component should be interchangeable component wise and assembly wise, except the Component are to be supplied as a set and to be assembled selectively as per sampling plan.

17) CALIBRATION CHECKS

(TEST STANDS/JIGS/FIXTUERS/GAUGES/INSTRUMENTS):

The supplier / Contractor should have suitable Instruments, Test Stand, jigs, fixture, mandrels and gauges to carry out quality checks, to ensure conformance of components/assembly as per drawing and Specification /T.R points.

The supplier/contractor should submit calibration reports for instruments/fixtures/gauges/mandrels etc., which are used during process of inspection activities.

18) MARKING/IDENTIFICATION

Marking of the items is to be carried out as called for in the relevant drawing, drawing/T.R points.

Inscription if any on the components is to be carried out as called for in the drawing/T.R points. Unless otherwise specified in the drawing/ specification, marking should not be carried out over the components.

For traceability, marking of part No., Manufacturer name, supply order No, Serial No/Qty, batch No. and manufacture date & year are to be carried out. Suitable method can be adopted, provided that the above parameters are legible and considering the parameters mentioned in the drawing and specification.

19) PRESERVATION CHECK

a) Preservative coatings are to be strictly adhered to as called for in the drawing. However, equivalent BIS Standards can also be followed, subject to the thickness of the coating/preservative is maintained as per the drawing/specification.

b) Other preservations as necessary to prevent damages due to moisture and dust during process, storage and transit are to be carried out. Conventional Methods can also be resorted to.

20) PACKING CHECK

Components / Assemblies are to be packed separately to avoid damages during transit / handling of the same. Part No. and No. of sets are to be marked on the packing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

Finished products shall be wrapped / packed using black and opaque polyethylene sheet or bags.

21) DOCUMENTATION

- i. Firm has to maintain all the documents as per QAP with respect to the SI.No.to have traceability.
- ii. Vendor has to submit Bill of materials, Material test reports, Class 'C' /Endurance test reports (wherever specified in drawing/TY specification/QAP) and Complete PIR (pre-inspection report)at the time of offering the item for inspection. HVF will commence inspection only after scrutiny of these documents.
- iii. The testing/inspection responsibility to test all the parameters as per QAP and drawing specifications as mentioned in Annexure -A (enclosed).
- iv. Pre inspection reports (PIR) of firm like, 1. Chemical analysis (NABL Certificate), 2.Mechanical properties (NABL Certificate), 3. Pre-forming process, 4. Coating certification. 5. Calibration reports of instruments and 6. 100 % Dimensional inspection reports.

22) REFERENCE:

1. Drawing No: 175.64.058
2. Material specification as per drawing:
STEEL 38XC GOST 4543-71.
3. GOST 4543-71 & GOST 7505-74.
4. Specification: 520.TY1.

SL. NO.	CATEGORY	ASSEMBLY/SUB ASSEMBLY	TESTS/INSPECTION PARAMETERS	STANDARDS TO BE REFERRED	ACCEPTANCE CRITERIA	INSPECTION RESPONSIBILITY			REMARKS
						Firm	HVF	DGQA	
1	GUIDE TO DRG. NO 175.64.058	Pre inspection reports (PIR) of firm	Firm has to produced all the document as per Para 21 (iv)	As per the relevant drawing and QAP.	Confirm to drawing and QAP as per bill of material	P	V	R	100% by firm/ vendor.
2		Bill of material (BOM)	Firm has to prepare the BOM as per QAP	Refer QAP Para no: 8 or item list.	Confirm to QAP.	P	V	R	100% by firm/ vendor.
3		Material tests	Chemical composition & Mechanical / Physical Properties	As per-GOST 4543-71.	All the values to confirm with QAP (Para no:13.1 (a), (b) & (c))	P	W/W	R	SP followed by HVF.
4		Hardness checks	Hardness 302...255 BHN (Dia of Ind.3.5 to 3.8)	Refer QAP Para no: 14(1)	Confirm to QAP Para no: 14(1)	P	W/W	R	SP followed by HVF.
5		Dimensional checks	Dimensions as per the drawing	Refer drawing /QAP Para no: 12.1	Confirm to drawing and QAP	P	W/P	R	100% by firm/ vendor SP followed by HVF.
6		Marking / traceability	Firm has to make marking / traceability records.	Refer QAP Para no: 18	Confirm to QAP Para no: 18	P	V	R	100% by firm/ vendor.
7		Preservation & packing	Firm has to make Preservation & packing records	Refer QAP Para no: 19 & 20	Confirm to QAP Para no: 19 & 20	P	V	R	100% by firm/ vendor.

Note:

For conformity of the items (Chemical/Physical/Mechanical properties).

1. One sample per heat / batch shall be tested under NABL Lab/Govt. Approved lab by firm. In case of non-compliance to standards entire lot shall be rejected or not to use in production further.

2. For cross conformation of material, manufacturer has to submit test sample pieces for the items used / test slab and button for rubber items / HVF will draw samples from supplied lot for Witnessing (W) at HVF premises. In case of non-compliance to standards entire lot will be rejected.

P- Perform

W- Witness

V-Verify

R-Review

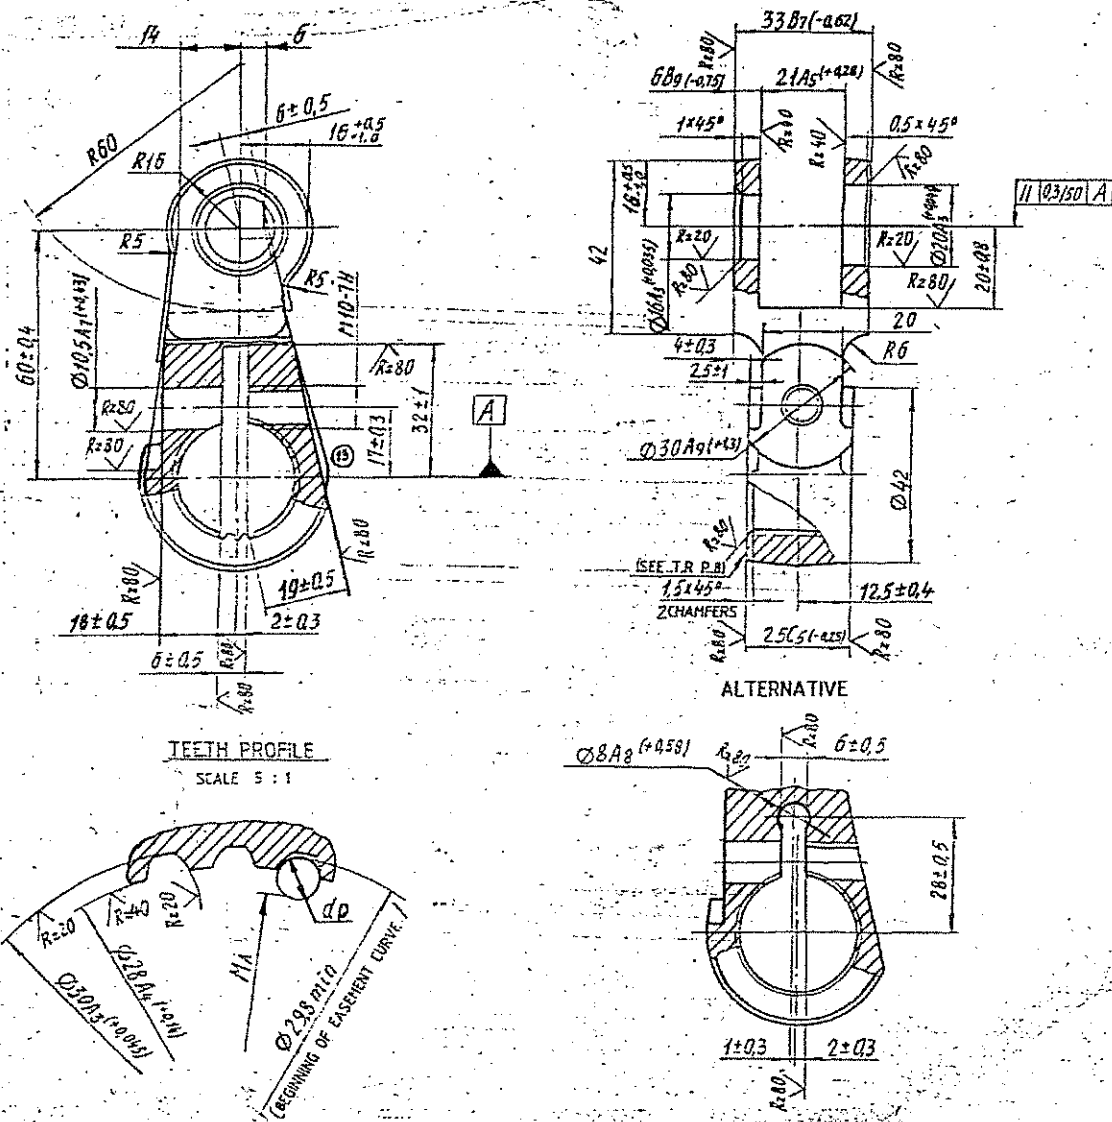


FIG: GUIDE TO DRG. NO 175.64.058
 (For reference only)

RECORD OF AMENDMENTS

Sl. No	Amendment No. & date	Amended by	Date of Insertion	Initial