

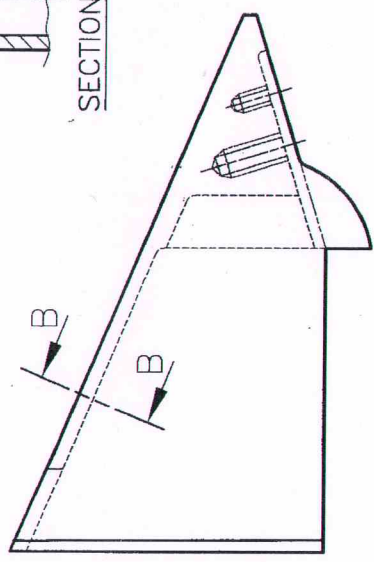


DRG. NO. 33P 3014

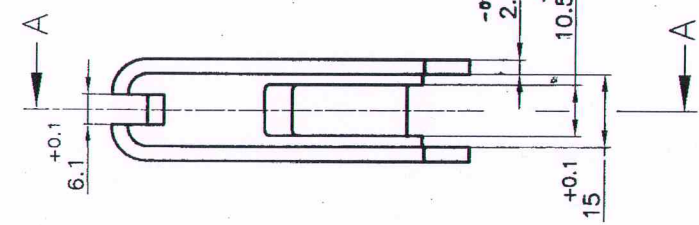

1.5 X 45°
2 SIDES

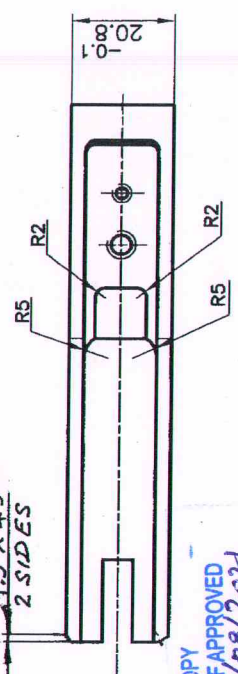

SECTION-AA

NOTE:—
ALL THE THREAD HOLES ARE PROTECTED FROM
HARD ANODIC COATING.

UN CONTROLLED COPY
CERTIFIED CORRECT COPY OF APPROVED
DRAWINGS AT THIS DATE: 10/08/2021
DESIGN & DRAWING OFFICE,
ORDNANCE FACTORY, TIRUCHIRAPPALLI

MATERIAL : AL 7075 WITH T6 CONDITION.
ALTERNATE MATERIAL : DTD - 5124.
HARDNESS : 375 - 425 HV. (HARD ANODIC COATING)

DIMENSIONS ARE IN mm.
UN TOLERATED DIMNS. AS PER IS : 2102 (MED)
SHARP CORNERS SHOULD BE BLUNT TO R 0.5
PROTECTIVE FINISH : HARD ANODIC COATING TO IS:6057, 1988
COATING THICKNESS: 0.05 mm MIN. TO 0.075 mm MAX.
DIMENSIONS ARE TO BE READ AFTER PROTECTIVE HARD ANODISING.

PART NO.	DESCRIPTIONS & SIGNATURE & DATE.	NO. OFF.	MATERIAL	TREATMENT	REMARKS
	TRACED				
	DRAWN				SCALE N T S
	CHECKED				STORE DRG. NO.
	HOS/D&DO				OPERATION NO.
	MMO OFFICER FOR MSL				SHEETS: 1
	OFFICER/D&DO				SHEET No.: 1
	APPROVED ON: 23/12/2014				
	SUB: HOUSING TRIGGER MECHANISM				
	FOR: MECHANISM S.A				
	OF: 38mm MSL				
	DES. REF. NO.				
	DRG. No.: 33P 3014				
	ORDNANCE FACTORY TIRUCHIRAPPALLI-16.				

