

**RESTRICTED
(DRAFT/PROVISIONAL)
QUALITY ASSURANCE PLAN**

**FOR
(BODY OF SUCTION PUMP RH)**

DRG.NO. 172.46.077/C

(LF NO: 3806407046)

**No. HVF/T72C/QAP/46/BODY OF SUCTION PUMP
RH/245811-00**

ISSUE No: 00

DATE: JULY-2023

QUALITY ASSURANCE (RIG-(OE))

HEAVY VEHICLES FACTORY

AVADI CHENNAI – 600 054

QUALITY ASSURANCE PLAN (QAP)

FOR


BODY OF SUCTION PUMP RH

172.46.077/C


PREPARED BY

REVIEWED BY


(C.NANDAKUMAR)
JWM/QA (RIG-GA&OH)


(V.RAJA)
JWM/QA (RIG-OE/CT&ST)

APPROVED BY


(NEERAJ KUMAR)
JT.GM/QA (RIG-OE)

ISSUED BY

QUALITY ASSURANCE (RIG-OE)
HEAVY VEHICLES FACTORY
AVADI CHENNAI – 600 054

SI. No	CONTENTS	PAGE .No.
1.	IMPORTANT NOTES	4
2.	INTRODUCTION	4
3.	AIM	4
4.	SCOPE	5
5.	DOCUMENTS	5
6.	ITEM USED ON	6
7.	LIST OF DRAWINGS	6
8.	BILL OF MATERIAL	6
9.	CONDITIONS OF USE/ STORAGE INSTRUCTIONS	6
10.	SAMPLING PLAN	7
11.	VISUAL INSPECTION	8
12.	DIMENSIONAL CHECKS	8
13.	MATERIAL CHECKS	9
14.	ACCEPTANCE / PERFORMANCE TESTS	10
15.	FITMENT AND PERFORMANCE TEST	11
16.	INTERCHANGEABILITY	11
17.	CALIBRATION CHECKS	11
18.	MARKING/IDENTIFICATION	11
19.	PRESERVATION CHECK	12
20.	PACKING CHECK	12
21.	DOCUMENTATION	12
22.	REFERENCE	13
23.	ANNEXURE - A	14
24.	FIGURE OF THE SAMPLE	15
25.	APPENDIX - A	16

1. IMPORTANT NOTES

Note-1

This is only a provisional and will be amended from time to time according to the requirement. No addition, deletion and reproduction will be done without permission of The Chief General Manager, Heavy Vehicles Factory, Avadi, Chennai – 54.

Note –2

Any instruction contained in this does not prejudice the terms and conditions of the contract what so ever. In case of any contradiction between the contents of this QAP and the clause in the contract, the latter will prevail.

Note-3

The stores should be manufactured strictly only as per the drawings supplied by the Inspection Authority and not as per the samples, if any received by the manufacturer for guidance purpose.

Note-4

Any amendment issued by the Inspection Authority shall be incorporated in the QAP and the records for the amendments carried out should be maintained as per the Performa at Appendix-“A”.

Note-5

In case of any contradiction between the contents of this QAP and drawings / Specifications/ GOST issued along with the contract, the latter only will prevail.

2. INTRODUCTION

1. This quality plan lays down the inspection and testing procedure to be carried out on the component **BODY OF SUCTION PUMP RH TO DRG NO. 172.46.077/C** being procured indigenously. This is prepared, based on the acceptance standards and inspection parameters laid down in collaborators documents and on the inspection test standards followed in respect of similar indigenous items.
2. This QAP is the property of Government of India and is liable for amendments as and when required. The Chief General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054, is the inspecting Authority for this assembly. Any query / clarification on the content of this QAP shall be referred to this Factory. Any departure from these instructions is allowed only after written approval from the above authority. Notwithstanding the tests indicated in this QAP, the inspecting Officer has the right to carry out any test to check conformance to the paper particulars quoted in the Supply Order, which he may consider necessary to satisfy himself about the stores which he has to accept.

3. AIM

This QAP is aimed at standardizing the Inspection procedure and acceptance norm for **BODY OF SUCTION PUMP RH TO DRG NO. 172.46.077/C**.

It also aims at giving adequate information to the manufacturer on the quality requirements so that the required quality control methods are established. This is also meant to guide authorized Inspection Officer in his routine inspection and to set out main points to which his attention must be drawn to ensure that the accepted stores meet the stipulated standards.

4. SCOPE:

This QAP outlines in general terms, the checks and methods to be used during inspection of **BODY OF SUCTION PUMP RH TO DRG NO.172.46.077/C** including the technical requirements of the drawings. The recommended Quality Plan stipulated herein is mandatory and should be strictly adhered to.

For inspection purpose, only the latest issue of this QAP will be made applicable and copies of this QAP can be obtained from the issuing authority i.e. The Chief General Manager, Heavy Vehicles Factory, Avadi, and Chennai.

Note:

- i. Tender enquiry (TE) and supply order (S.O) will be issued with QAP stating that inspection will be done as per QAP.
- ii. In case of TE, It is responsibility of the vendor to obtain the copy of QAP and give the statement of compliance that vendor will abide by the QAP in case supply order is placed.
- iii. In case of S.O, it is the responsibility of the vendor to obtain copy of QAP and give the statement of compliance that the vendor will follow QAP. However, CGM/HVF reserves the right to revise/update the QAP from time to time.

5. DOCUMENTS:

- a) On placement of firm supply order, One set of relevant technical documents for manufacturing (includes details about material, casting/forging, machining, heat processes, etc and up to final inspection) the components like GOST/Drawing/Specification, Technical data book, process sheet etc, and technical instructions on the subject item is to be obtained by the contractor from AHSP through DDO/HVF.
- b) Any clarification required on these documents to be obtained from the Inspecting Authority i.e. The Chief General Manager, Heavy Vehicles Factory, Avadi, Chennai – 600 054. Equivalentents to the collaborators specifications and standards will be decided only by the Inspecting Authority and should not be unilaterally decided. For any change in the specifications, standards or written approval, any alterations in specification can be affected and not otherwise.
- c) The process instruction sheets supplied by the collaborators are available with the Authority Holding Sealed Particulars, i.e. The Controllerate of Quality Assurance (Heavy Vehicles), Avadi, Chennai for the reference. The relevant

process sheets may be studied at the premises of the AHSP after obtaining necessary permission.

- d) The supplier after scrutiny of the concerned process sheets and connected paper particulars should establish the necessary production and inspection facilities. Particularly the inspection test rigs, stands, fixtures, template, gauges etc should be provided as recommended in these process sheets. If process sheet / Process Book is not available the details particulars/parameters available in the drawings to be strictly adhered.

6. ITEM USED ON/TO MANUFACTURE:

1. 172.46.077 -

7. LIST OF DRAWINGS:

SI. NO.	DRG. NO	NOMENCLATURE	REMARKS
1	172.46.077/C	BODY OF SUCTION PUMP RH	-

8. BILL OF MATERIALS: (Individual items as mentioned in table to Para 7)

SI. NO	DRG. NO	NOMENCLATURE	MATERIAL SPECIFICATIONS	Qty
1	172.46.077/C	BODY OF SUCTION PUMP RH	CASTING C4 20 GOST 1412-85	1

Note: Vendor / Contractor may use approved alternate material, if any specified in drawing/specification. *Also refer Para no: 13.

9. CONDITIONS OF USE / STORAGE INSTRUCTIONS

This assembly / item should be properly packed to protect from transit / handling damage and influence of atmospheric precipitations. In addition, the following parameters should be ensured:

- (a) The threaded parts if any should be covered with suitable plastic caps to prevent damages.
- (b) If the item consists of assemblies, each assembly should be packed separately.
- (c) The stores are to be suitably covered for preventing ingress of dust and Dirt/entry of sunlight / moisture.
- (d) The packaging slip shall contains
 - (i) Certificate of testing (NABL)
 - (ii) Guarantee/ Warranty Certificate
 - (iii) Service and maintenance instructions(If applicable)
 - (iv) Delivery Slip with Inspector's Acceptance Mark
 - (v) Undertaking letter / conformance of certificate (as applicable).

- (e) The stores are not permitted to be stored together with oils. Petrol, acids, alkaline and other substances to avoid damage to the metal / rubber components.

10. SAMPLING PLAN:

Sl. No.	Sampling Plan	Pilot	Bulk
	Acceptance test (as below)		
(i)	Visual Inspection	100%	100%
(ii)	Dimensional Inspection Including Hardness	100%	General Inspection level III, single sampling, Normal Inspection, AQL 2.5 of IS 2500 (Part-I)-2000
(iii)	Material Inspection (Including mechanical, chemical, fracture test)	1 No	1 No. for each batch of melt/as required by specifications and as required by HVF for confirmation of material.
(iv)	Pressure testing	-----	-----
(v)	Machining/Fitment/ Performance trial on higher assembly / Tank	01 No.	01 No. per batch/As required.
(vi)	Interchangeability Test	----	-----
(vii)	Calibration Reports/Certificates of Test stand/Jigs/ Equipments Fixtures/Gauges/Man drels/etc.	100 %	100 %
(viii)	Marking/Identification	100%	100%
(ix)	Packing/ Preservation	100%	100%

Note:-

A New (First time supplier of this item) supplier should obtain clearance from HVF for bulk production which will be issued only after inspection/evaluation of pilot samples by HVF. (Refer Specification 172 TY7 and related specification for acceptance test, periodic test, Fracture and Type test of material)

During acceptance of castings, the following are to be checked as per Specification: (For details refer Specification 172 TY7, GOST 1412-85

1. Chemical composition of steel;
2. Mechanical properties of steel;

3. External view (absence of defects) and quality welding of casting defects;
4. Dimensions;
5. Hardness;
6. Absence of internal defects
7. Macrostructure/Microstructure.
8. Fracture test

11. VISUAL INSPECTION [Sampling plan as per Para- 10 (i)]

The stores are to be visually examined on 100 % of pilot /bulk and same should be free from any defects and all the finishing requirements shall satisfy as indicated in technical conditions of the assembly / component drawing.

The components shall be checked for the following and should be free from the defects:

- Defects in construction
- Cracks/Flaws/blowholes/shrinkage/porosities
- Fitment of all components
- Presence of foreign particles
- Moisture and dust
- Corrosion of metal parts
- Mechanical imperfections & distortion
- Any form of deterioration of material and finishing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

12. DIMENSIONAL CHECK [Sampling plan as per Para- 10(ii)]

The dimensions of individual component, sub assembly and major assembly shall be checked and ensured as per respective drawing. Dimensional check should be carried out as per sampling plan. However, the inspecting authority/rep. may at his discretion, tighten the inspection level and acceptance quality level on the critical items and adopt check point during manufacture.

12.1 BODY OF SUCTION PUMP RH TO DRG.NO: 172.46.077/C

1. All dimensions shall be confirmed as per drawing/specification.
2. Surface finish/Roughness should be confirmed as per drawing and specification.
3. For admissible alternate method for manufacture in dimensions/material if any, refer drawing/specification.

Note: Clarification regarding weight of casting can be obtained from HVF before manufacturing the component and refer related specification.

13) MATERIAL CHECKS [SAMPLING PLAN AS PARA – 10 (iii)]

Material specimen /test bars of the components shall be in conformity as per the material mentioned in the relevant documents/drawing. NABL test reports for all the parameters as per relevant specifications to be submitted. Test samples to be submitted by the vendor to HVF, if required. The material check will be carried out as per sampling plan. *However, if the manufacturer proposes any alternative material at the stage of tender enquiry, the same has to be approved and a written concurrence shall be obtained from AHSP through DDO/HVF, before usage of such materials.

For each heat code/batch the test bars/test samples as specified in GOST/specification is to be submitted for testing chemical, mechanical, physical properties and other parameters of the casting and also the test certificates for the same tested by the supplier is to be submitted.

13.1 BODY OF SUCTION PUMP RH TO 172.46.077/C.

a) The component should be manufactured from CASTING C4 20 GOST 1412-85.

b) Chemical properties: As per CASTING C4 20 GOST 1412-85.

Grade	CONTENT OF ELEMENTS%								
	C	Mn	Si	Cr	Ni	Mo	V	S	P
								MAX	
C4 20	3.3 to 3.5	0.7 To 1.0	1.4 to 2.4	--	--	--	--	0.15	0.2

Note: For mass fraction of other elements refer GOST 1412-85.

c) Mechanical properties: As per CASTING C4 20 GOST 1412-85.

Grade	Ultimate strength, MPa, (Kgf/mm ²)	Yield point, Mpa/mm ² (kgf/mm ²)	Elongation %	Relative reduction of area %	Impact strength KJ/m ² (Kgf.m/cm ²)
	Not less than				
C4 20	200 (20)	Refer GOST 1412-85			

Note: For details of other parameters & properties refer GOST 1412-85.

14) PERFORMANCES / ACCEPTANCE TEST OF BODY OF SUCTION PUMP RH TO DRG.NO: 172.46.077/C (TR Points)

(The following shall be ensured/followed during manufacturing the components)

1. HARDNESS HB 170 - 241 (DIA OF INDENTATION 4.6 - 3.9)
2. DRAFT SHOULD NOT EXCEED 2°.
3. UNSPECIFIED CASTING RADII R4 - 6 mm.
4. CASTING SHOULD BE FREE FROM FOUNDRY DEFECTS.
5. OTHER CASTING REQUIREMENTS SHOULD COMPLY WITH 172.TY 7
6. MACHINED DIMENSIONS ARE GIVEN IN BRACKETS.
7. ALL DIMENSIONS ARE IN MM.
8. PHANTOM LINES INDICATES MACHINED SURFACE.
9. * MARKED DIMENSIONS FOR REFERENCE.
10. PILOT SAMPLE SHOULD BE APPROVED BEFORE BULK SUPPLY.

EXPLANATORY NOTE:

- 1) Stage wise process and inspection of the component as specified in TD Book/ Process Book/ illustration book/specification is to be confirmed by the supplier during manufacturing the components.
- 2) Firm shall submit details of manufacturing process, inspection process and also reports for the same to HVF.
- 3) If required/applicable HVF shall witness/verify stage wise inspection /process details during manufacturing of the components.
- 4) The component may be subject to endurance test, when fitted in higher assembly as specified in process / illustration /TD book.
- 5) Apart from above, all other relevant test for acceptance of the component, (i.e. heat treatment process, heat treatment cycles, etc. and up to final inspection as applicable) of the item as specified in GOST / Specification / drawing / TD book shall be carried out by the firm and the report/ certificates shall be submitted to HVF.
- 6) Firm has to follow the manufacturing details/parameters for producing the component as specified in the technical data / process book and confirm as per the TD/Process Book. The inspection reports carried out for the same is to be submitted to HVF. HVF will carry out verification for cross confirmation if required.

Note:

The casting Manufacturers are required to follow the instructions strictly so far as supply of castings.

- a) The casting supplied should satisfy the required chemical and physical properties, hardness, etc.
- b) After heat treatment of the components, the firms are advised in their own interest to check the properties of material and satisfy themselves for its correctness before dispatch.

15) FITMENT / MACHINING AND PERFORMANCE TEST:

- a. Pilot samples shall be checked for fitment/machining trials at HVF and Performance test to ascertain the efficacy of the system under different operating conditions by fitting in higher assembly and repeating it for functional checks, wherever required.
- b. The item should possess appropriate material for machining as indicated in the drawing and should be supplied in such a way that the components to suit in machine/fixtures/Jigs etc to carry out machining.
- c. The component should be free from any defects after machining in trial and the casting should be in line with the parameters as specified in the GOST and Specification.
- d. The casting shall be clean, free from porosity blow holes, hard spots, Cold shut, distortion, cracks and other harmful defects as per the specification.
- e. The casting shall be well dressed and fettled and shall be readily machinable.
- f. Casting shall be cleaned / shot blasted and preservation coating is to be done after heat treatment as called for in the specification.
- g. No weld/repair should be carried out without prior permission from HVF.
- h. Testing methods for acceptance of the casting refer Specification 172.TY 7 & GOST 1412-85.
- i. Components shall be cleared for bulk supplies only after acceptance of the components in machining trials at HVF.

16) INTERCHANGEABILITY:

17) CALIBRATION CHECKS

(TEST STANDS/JIGS/FIXTURES/GAUGES/INSTRUMENTS):

The supplier / Contractor should have suitable equipments, Test Stand, jigs, fixture, mandrels, templates and gauges to carry out quality checks, to ensure conformance of components/assembly as per drawing and Specification /T.R points.

The supplier/contractor should submit calibration reports/certificates for instruments/fixtures/gauges/mandrels etc., which are used during process of inspection activities.

18) MARKING / IDENTIFICATION

Marking of the items is to be carried out as called for in the relevant drawing, drawing/T.R points.

Inscription if any on the components is to be carried out as called for in the drawing/T.R points. Unless otherwise specified in the drawing/ specification, marking should not be carried out over the components.

For traceability, marking of part No., Manufacturer name, supply order No, Serial No/Qty, batch No. and manufacture date & year are to be carried out. Suitable method can be adopted, provided that the above parameters are legible and considering the parameters mentioned in the drawing and specification.

19) PRESERVATION CHECK

- a) Preservative coatings are to be strictly adhered to as called for in the drawing. However, equivalent BIS Standards can also be followed, subject to the thickness of the coating/preservative is maintained as per the drawing/specification.
- b) Other preservations as necessary to prevent damages due to moisture and dust during process, storage and transit are to be carried out. Conventional Methods can also be resorted to.

20) PACKING CHECK

Components / Assemblies are to be packed separately to avoid damages during transit / handling of the same. Part No. and No. of sets are to be marked on the packing.

Packing and preservation should be ensured as per drawings/relevant TY specification (To be ensured on receipt at consignee end).

Finished products shall be wrapped / packed using black and opaque sheet or bags.

21) DOCUMENTATION

- i. Firm has to maintain all the documents as per QAP with respect to the SI.No. of components to have traceability.
- ii. Vendor has to submit Bill of materials, Material test reports, Class 'C' /Endurance test reports (wherever specified in drawing/TY specification/QAP) and Complete PIR (pre-inspection report)at the time of offering the item for inspection. HVF will commence inspection only after scrutiny of these documents.
- iii. The testing/inspection responsibility to test all the parameters as per QAP and drawing specifications as mentioned in Annexure -A (enclosed).
- iv. Documents to be submitted as Pre inspection reports (PIR) by firm.

SI. No	Documents
1	Chemical analysis (NABL)
2	Mechanical properties (NABL)
3	Pre-forming process
4	Coating certification (wherever applicable),

5	Calibration reports of instruments/Equipments and gauges etc,
6	100% Dimensional inspection reports
7	Pressure test (leakage test) if applicable,
8	Hardness checks reports
9	Certificates for Macro/Micro structure (wherever applicable)
10	Fracture test and other relevant test (Type test, Periodic test as applicable) reports for acceptance of the castings, etc
11	Guarantee/ Warranty Certificate.
12	Service and maintenance instructions (If applicable).
13	Undertaking letter / Conformance of certificate (As applicable).
14	Component weight details.

22) REFERENCE:

- a) Drawing No: 172.46.077/C
- b) Material specification as per drawing: CASTING C4 20 GOST 1412-85.
- c) Specification: 172 TY7.
- d) GOST 1412-85.
- e) Alternate Material: G.I. CASTING GDE FG.220 TO IS: 210-93.

ANNEXURE-A

SL. NO.	CATEGORY	ASSEMBLY/ SUB ASSEMBLY	TESTS/ INSPECTION PARAMETERS	STANDARDS TO BE REFERRED	ACCEPTANCE CRITERIA	INSPECTION RESPONSIBILITY			REMARKS
						Firm	HVF	DGQ A	
1	BODY OF SUCTION PUMP RH TO DRG. NO 172.46.077/C	Bill of material (BOM)	Firm has to prepare the BOM as per QAP	Refer QAP Para no: 8 or item list.	Confirm to QAP	P	V	R	100% by firm/ vendor.
2		Pre inspection reports (PIR) of firm	Firm has to produce all the document as per QAP	As per the relevant drawing/specification/TD book/process book and QAP.	Confirm to relevant drawing/specification/TD book/process book and QAP as per bill of material	P	V	R	100% by firm/ vendor.
3		Dimensional checks	Dimensions as per the drawing	Refer drawing / QAP Para no: 12.1	Confirm to drawing and QAP	P	W/P	R	100% by firm/ vendor & SP followed by HVF.
4		Material tests	Chemical composition & Mechanical / Physical Properties	As per GOST 1412-85	All the values to confirm with QAP (Para no:13.1(a) & (b),(c))	P	W/V	R	100% by firm/ vendor. SP followed by HVF.
5		Hardness check	Hardness HB 170-240 (Diameter of Indentation 4-6-3-9 mm)	Refer drawing /QAP Para no: 14(1)	Confirm to drawing and QAP Para no: 14(1)	P	W/P	R	100% by firm/ vendor. SP followed by HVF.
6		Machining Trial	Suitability of component for machining & free from defects after machining	Refer QAP Para no.10 (v) & Para 15	Confirm to QAP Para no.10 (v) & Para 15	-	P	R	SP followed by HVF.
7		Marking / traceability	Marking / traceability	Refer QAP Para no:18	Confirm to QAP Para no:18	P	V	R	100% by firm/ vendor. SP followed by HVF.
8		Preservation & packing	Preservation & packing	Refer QAP Para no 19 & 20	Confirm to QAP Para no 19 & 20	P	V	R	100% by firm/ vendor.
9		Other testing Parameters for acceptance	As per drawing/specification/TD book/ Process Book GOST	Refer drawing/specification TD book/ Process Book GOST	Confirm to specification 172 TY 7	P	W/V	R	As per SP of HVF by firm and SP followed by HVF.

Note:
For conformity of the items (Chemical/Physical/Mechanical properties).

1. One sample per heat / batch shall be tested under NABL Lab/Govt. Approved lab by firm. In case of non-compliance to standards entire lot shall be rejected or not to be used for production further.
2. For cross conformation of material, manufacturer has to submit sufficient quantity (as specified in GOST/Specification/supply order) test sample pieces for the items used / test slab and bution for rubber items / HVF will draw samples from supplied lot for Witnessing/Verify/Perform(W/V/P) at HVF premises. In case of non-compliance to standards entire lot will be rejected as per the Terms and Conditions.
3. For approval/acceptance of the casting all tests as per Specification 172 TY10 is to be carried out and confirmed.

P-Perform **W-Witness** **V-Verify** **R-Review** **SP-Sampling Plan**

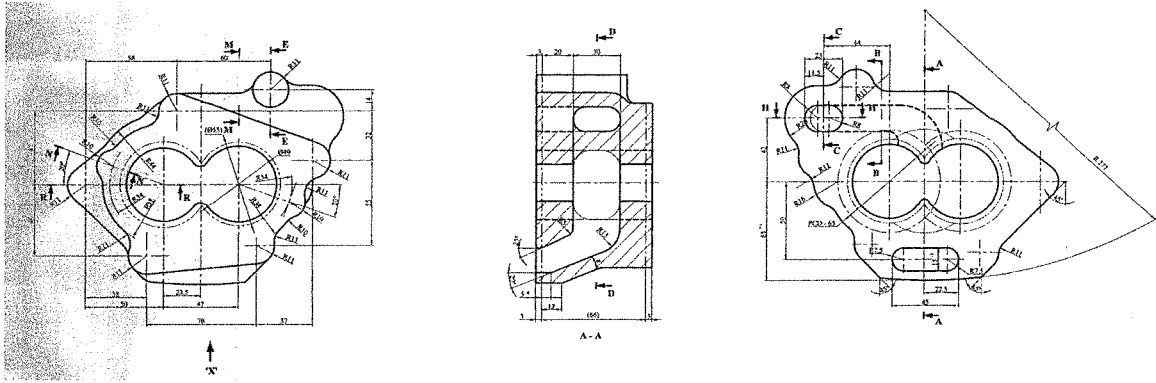


FIG: BODY OF SUCTION PUMP RH TO DRG. NO 172.46.077/C
(For reference only)

RECORD OF AMENDMENTS

Sl. No	Amendment No. & date	Amended by	Date of Insertion	Initial