


907 329-05-7 CB

ЕСКД

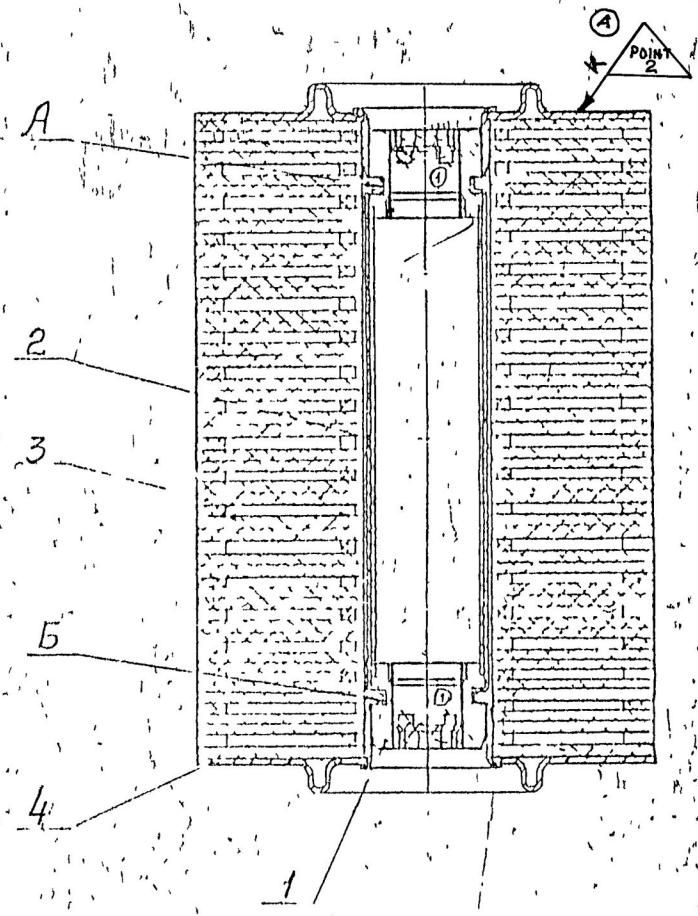

Деталь поз 2 одеть на дет.поз 1, в канавках А, Б, затянуть шнур до внутреннего диаметра канавок; связать шнур одинарным узлом. Концы шнура обернуть вокруг сетки по канавке 1-2 раза, связывая их каждый раз одинарным узлом.

1. COMP 2 SHOULD BE FITTED ON COMP 1 CORD SHOULD BE TIGHTENED UP TO THE INNER DIAMETER OF GROOVES A AND B AND TIED WITH SINGLE KNOT ENDS OF CORD SHOULD BE WOUND AROUND THE STRAINER ALONG THE GROOVE 1-2 TIMES, TIED WITH SINGLE KNOT EVERY TIME.

A 2. TO MARK CHEMICALLY AS PER UJ 581-85.

PILOT SAMPLE SHOULD BE APPROVED BY A HSP BEFORE BULK PRODUCTION

		EST. MASS 0.41 Kg.	TO BE STAMPED OR MARKED WHERE INDICATED (IUS II LETTERS)
		ALL SHARP EDGES AND CORNERS TO BE REMOVED UNLESS OTHERWISE STATED (MACHINING CORNERS TO HAVE R OUTSIDE R INSIDE EQUIVALENT DIMENSIONS ARE PERMISSIBLE)	
A	6-3-94	AUTHY NOTN NO. 87-338	MATERIAL: _____ USED ON - CB 3329-00-13 CB 20-29-00-8
ISSUE DATE		NATURE OF AMENDMENTS	
DIN	mm	SCALE: 1:1	CONTROLLER RATE OF QUALITY ASSURANCE (HEAVY VEHICLES) A V A D I
CHD	mm	DIMENSIONS IN mm	TITLE: ASSY FILTERING ELEMENT
ICD	mm	TOLERANCE ON DIMS UNLESS OTHERWISE STATED	
APPD			D/S CAT NUMBER
DATE	3.2.88	ALL THREADS TO CONFORM TO	

33084 15mm 30/11/88

