

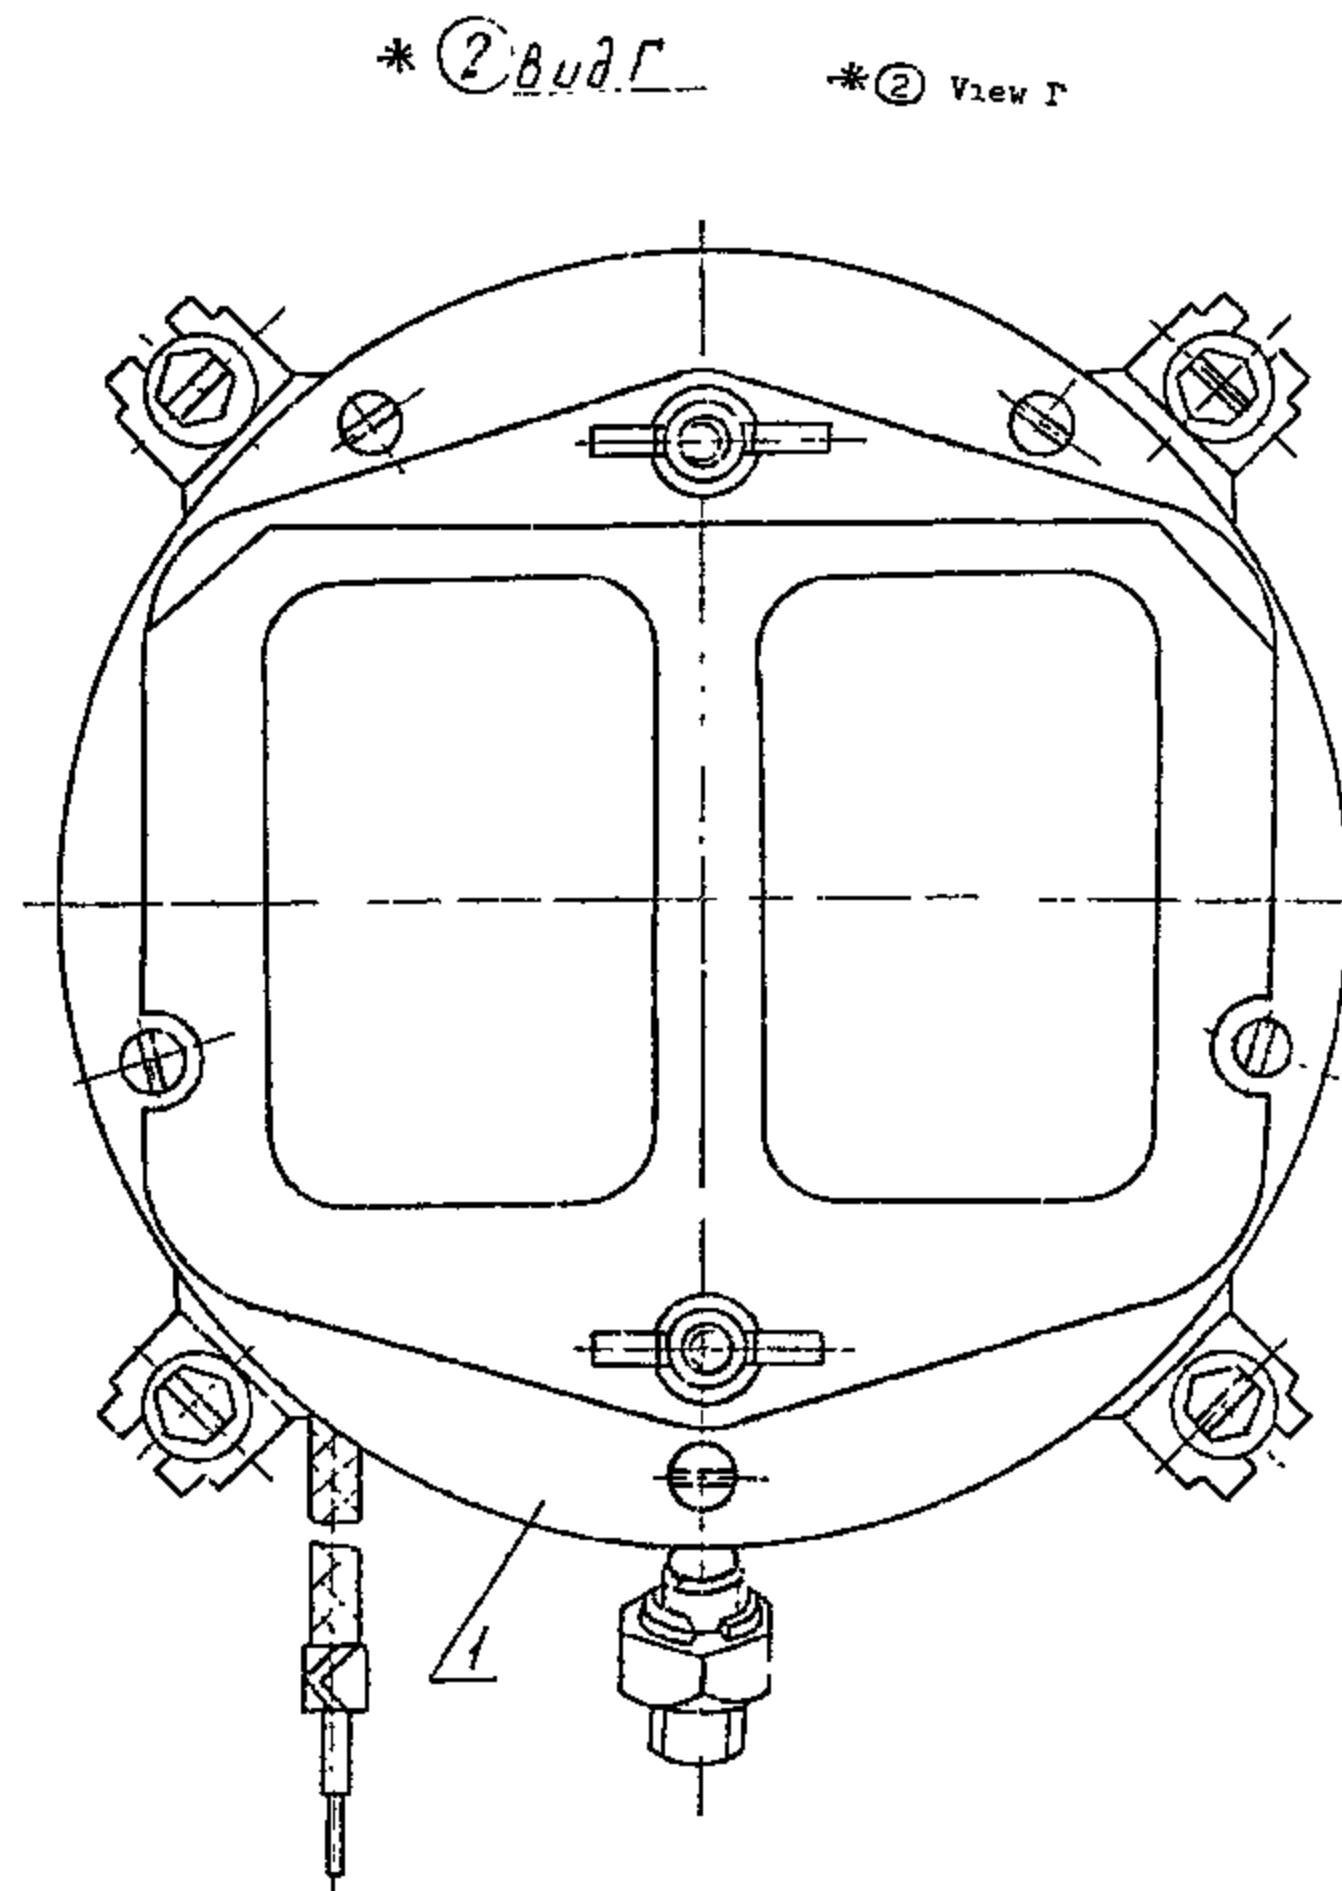


No.	Designation	Description	Qty	Remark
Ⓐ 1 5 6	675-95-c6167 CB	<u>List of Documents</u>		→ Pt No. LV2 / RCV-6230-000335 (00358-ICV) Ⓐ
		Assembly drawing		
		<u>Assembly Units</u>		
	765-95-c6118	Digital attachment	1	
		<u>Miscellaneous Items</u>		
		Headlight DR-126 TY 37.003.749-76	1	
		<u>Materials</u>		
		Sleeve III TB-50-355-5, unpainted FOCT 19034-73 ℓ = 500	1	

00358-ICV BS JUNE 93	Ⓐ RCV COM	DS CAT PART No. ADDED AND NOMENCLATURE WAS " HEAD LIGHT DR R126 "
DC(I)No. & DATE	ISSUE	AMENDMENTS

APPROVED		675-95-Sb161	DS CAT PART No. LV2/RCVs 6230-000335			
CHECKED		Ⓐ HEAD LIGHT		WEIGHT	SCALE	
CONTROLLERATE OF QUALITY ASSURANCE (ICV)						
			SHT 1	SHTS 1		

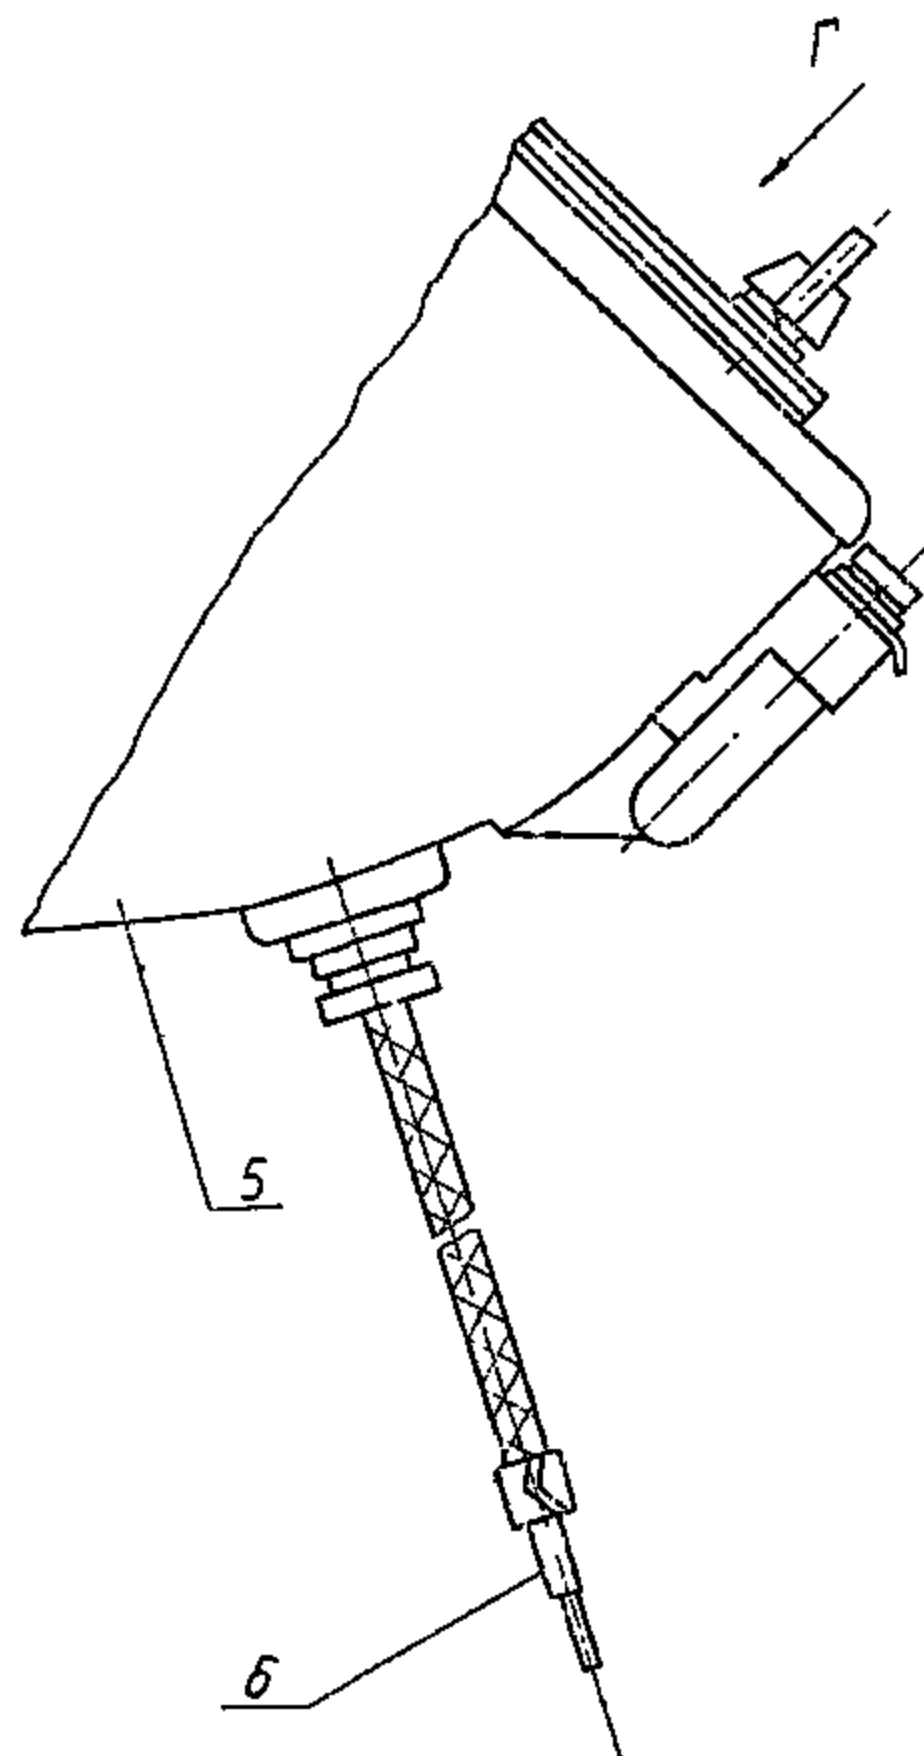

Secure the digital attachment, Ref. No. 1, to the headlight, Ref. No. 5, with standard screws

* 2 Bud. L * 2 View T


00358-ICV	A	DS CAT PART No. ADDED, AND NOMENCLATURE WAS
BA	CDM	"HEAD LIGHT 128"
JUN 93		
DC (No. DATE)	ISSUE	AMENDMENTS

APPROVED		675-95-Sb167Sb		DS CAT PART No. A	
CHECKED				LV2/RCVs 6230-000335	
CONTROLLERATE OF QUALITY ASSURANCE (ICV)		HEAD LIGHT ASSEMBLY DRAWING		A	
				WEIGHT	SCALE
			2.37	1:1	
				SHT 1	SHTS 1

THE ABBRIVATIONS AND SYMBOLS ARE BASED ON RUSSIAN SPECIFICATIONS.
ALL DIMENSIONS ARE IN mm.

19-96-591


R₂ 160

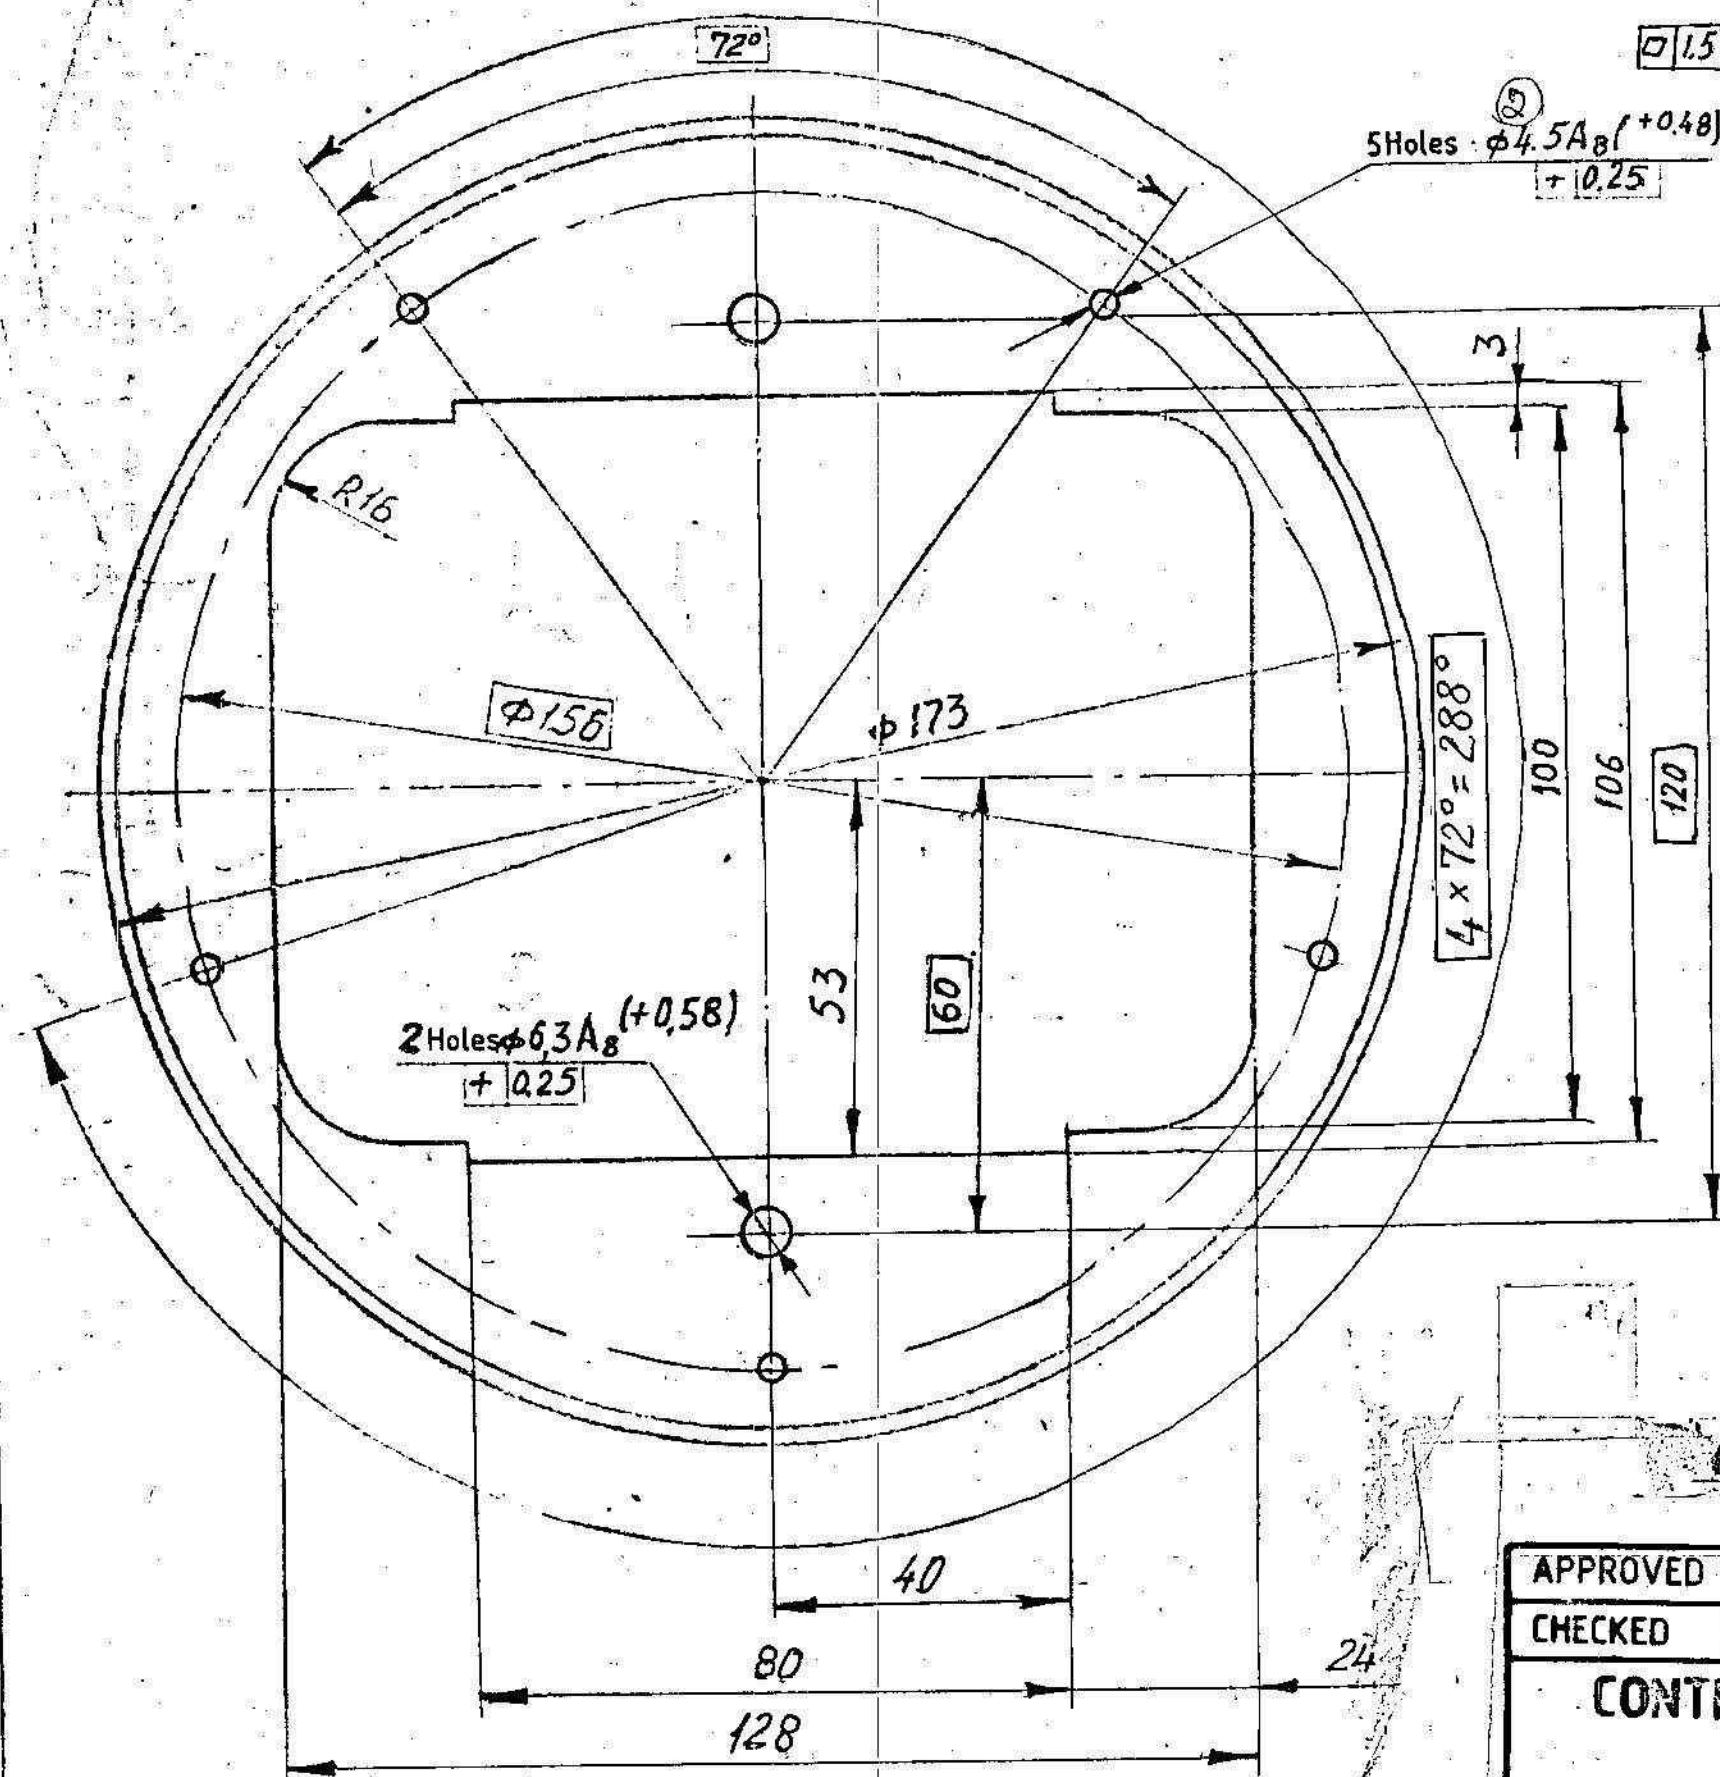

1. Alternate material is Steel 10Kn GOST 1050-74.
 2. Unspecified limit deviations of dimensions are $\pm 1\text{mm}$.
 3. Thinning at bends should not exceed 25% of nominal thickness.
 4. * Dimension is given for reference.
- (A) EQ. MATERIAL:- STEEL SHEET GRADE D/DD TO IS:1079

DD 002-ICV	(A)	EQ. MATERIAL ADDED IN THE DRAWING
18-8-2000		
DC (I) No	ISSUE	NATURE
DATE		AMENDMENT


APPROVED	M VASU	765-95-61	
CHECKED	PRASAD	HOLDER	
CONTROLLERATE OF INSPECTION (ICV)		sheet	A 1.5 GOST 19904-74
		5-II-T-10	GOST 16523-70
		WEIGHT	SCALE
		0.161	1:1
		SHT	SHTS
			95
		76 OF 84	

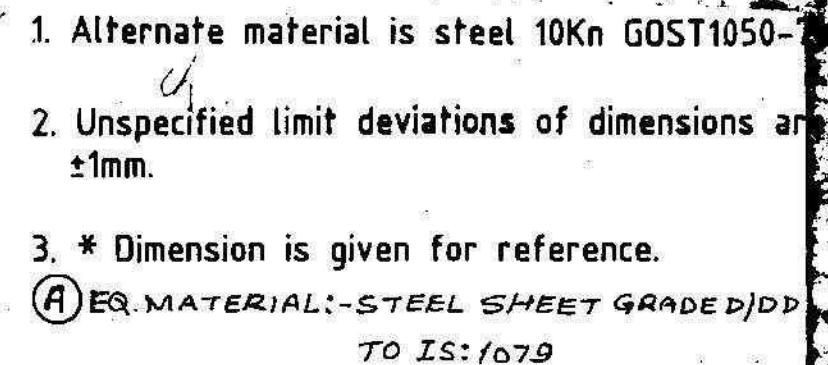

APPROVED	 M VASU	765-95-62	
CHECKED	 PRASAD	COVER PLATE	WEIGHT
CONTROLLERATE OF INSPECTION (ICV)			0.096
		SHT	SHTS
		Sheet B 10 GOST 19903-74	45
		5-III-H-10- GOST 16523-70	

765-95-63

✓✓

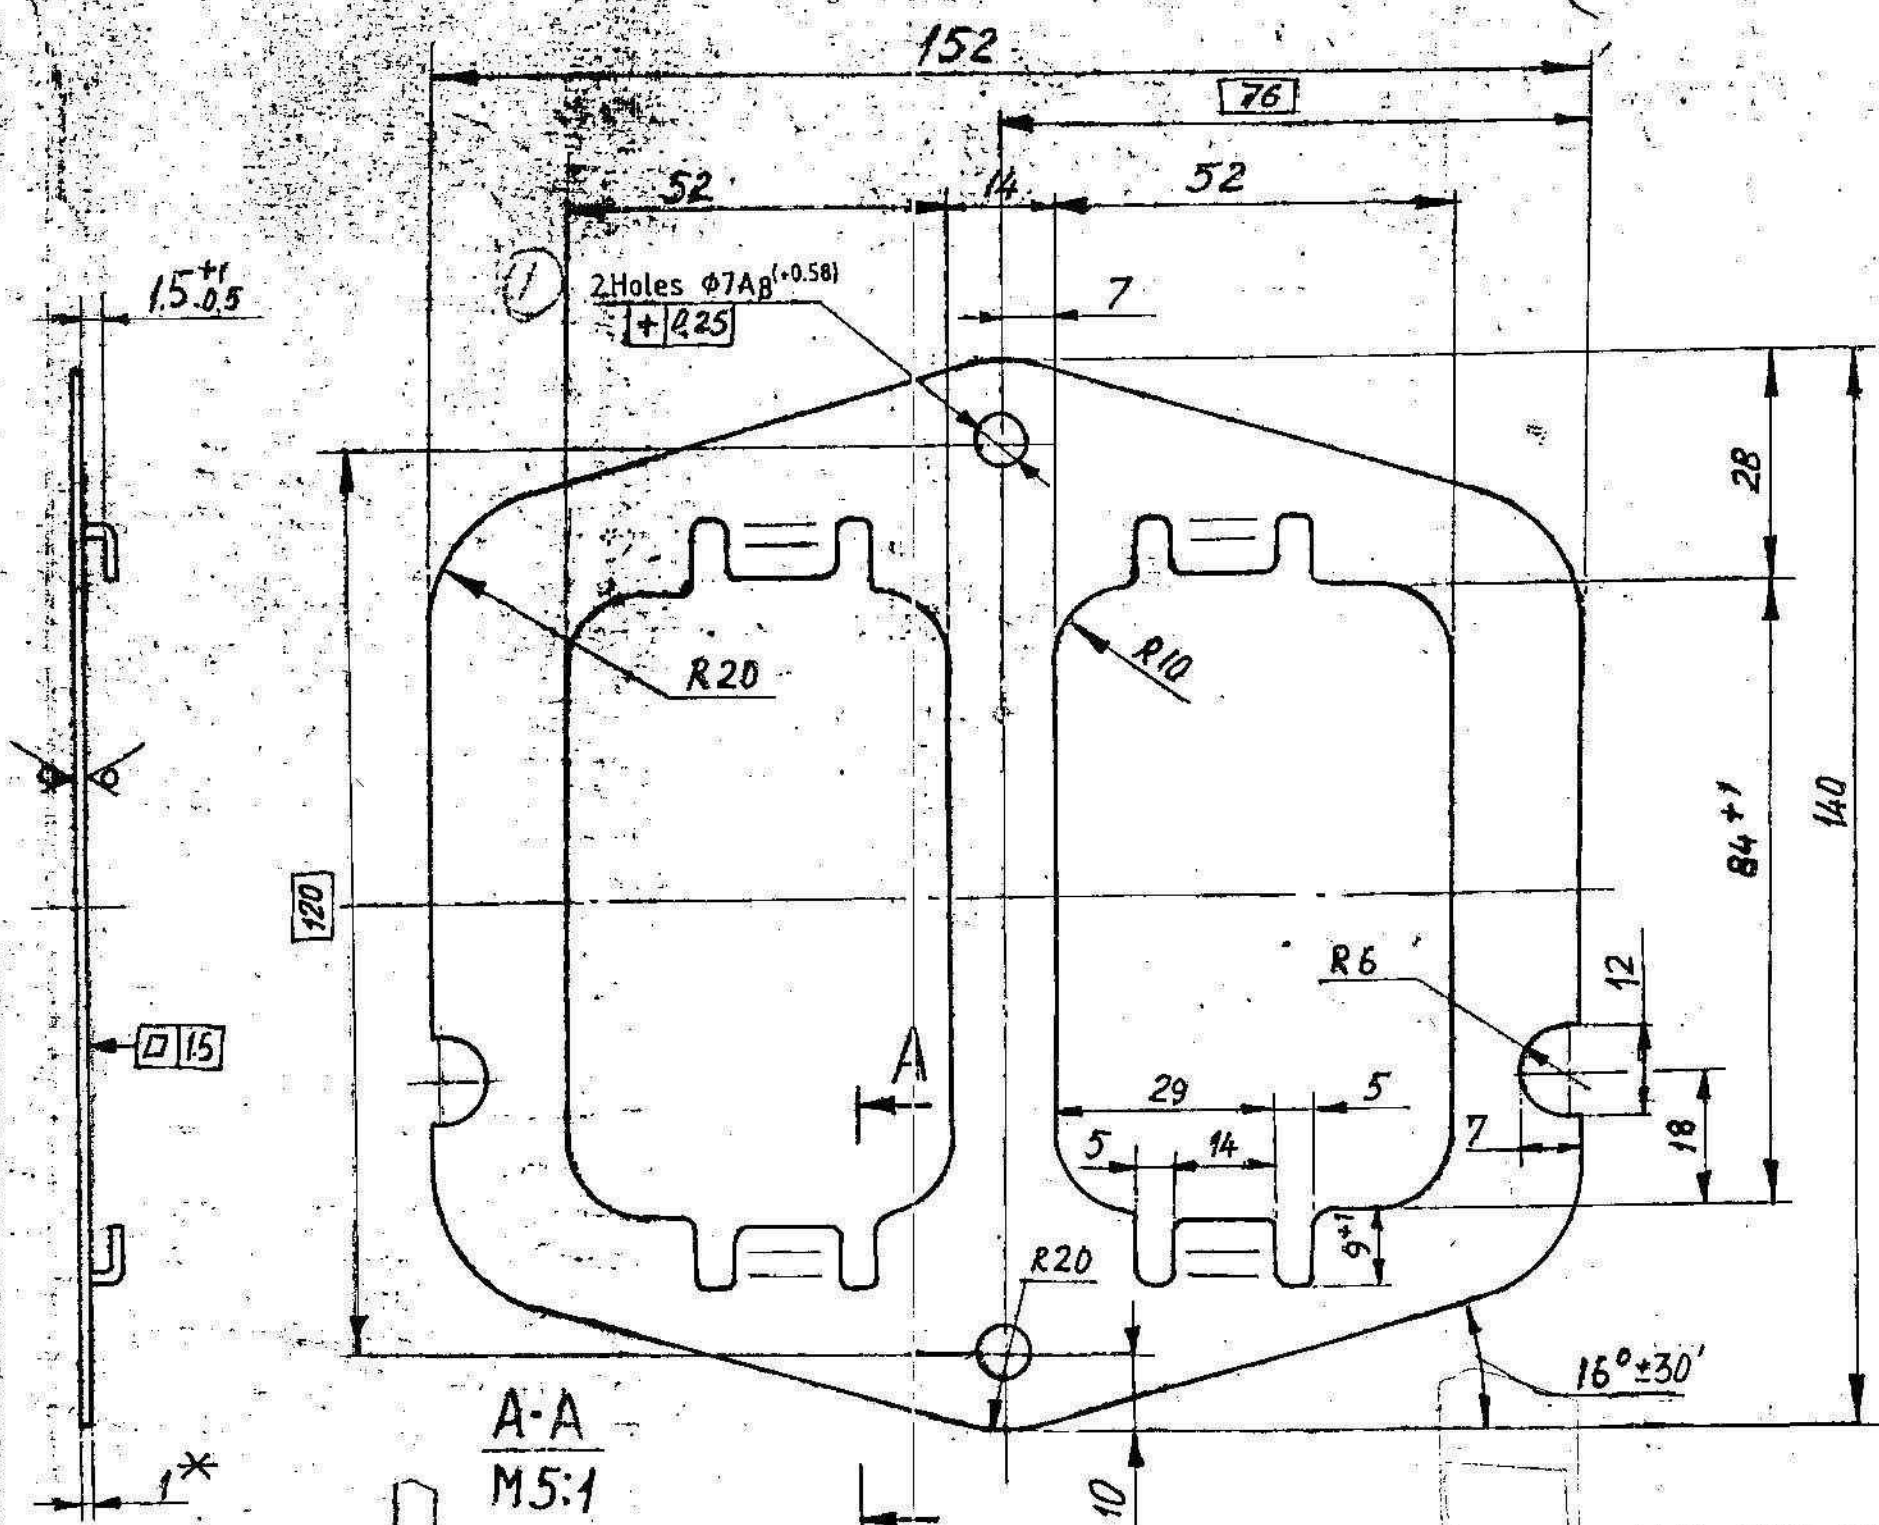

1. Alternate material is steel 10Kn GOST 1050-74.
 2. Unspecified radii are 2mm.
 3. Unspecified limit deviations of dimensions are ± 1 mm.
 4. *Dimension is given for reference.
- (A) EQ. MATERIAL: - STEEL SHEET GRADE D/DD TO IS: 1079

D-85


APPROVED	H VASU	765-95-63	
CHECKED	V.P. Reddy		
CONTROLLERATE OF INSPECTION (ICV)		FRAME	WEIGHT 0.114
			SCALE 1:1
		SHT	SHTS 95
		sheet BI.O.GOST 19903-74 5-III-H-10 GOST 16523-70	

00802-1CV	(A)	EQ. MATERIAL ADDED IN THE DRAWING
18-8-2000		
DC (1) NO	ISSUE	NATURE
DATE		

765-95-73

R₂ 80/


✓(M)

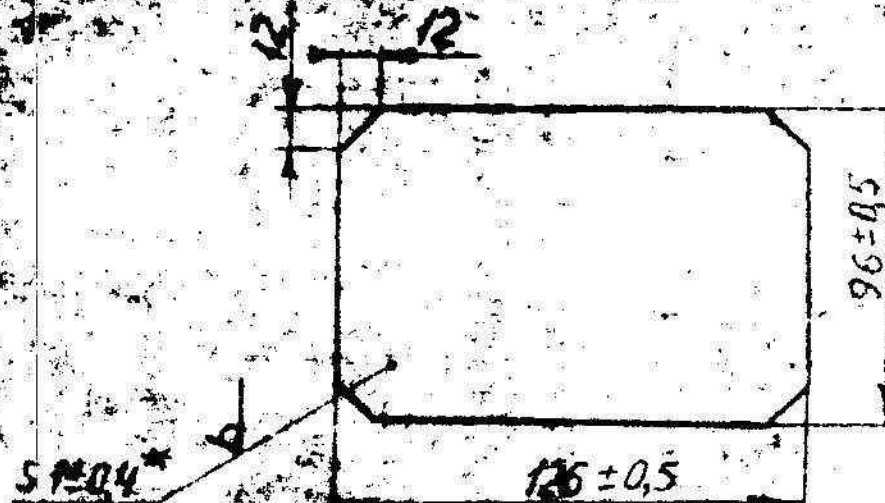

1. Alternate material is acrylic plastic sheet for light filters COK-011, COK-101, COK-111, TY6-01-1210-79 without coating.
2. Coating H4-62, red, OST 6-10-391-74 in five layers on one side.
3. Unspecified limit deviations of dimensions are $\pm 1\text{mm}$.
4. * Dimension is given for reference.

APPROVED	<i>[Signature]</i> M VASU	765-95-73							
CHECKED	<i>[Signature]</i> PRASAD	RED LIGHT FILTER							
CONTROLLERATE OF INSPECTION (ICV)		TOC N 1. grade 1. colourless GOST 17622-72							
		<table border="1"> <tr> <td>WEIGHT</td> <td>SCALE</td> </tr> <tr> <td>0.016</td> <td>1:2</td> </tr> <tr> <td>SMT</td> <td>SHTS</td> </tr> <tr> <td></td> <td>95</td> </tr> </table>		WEIGHT	SCALE	0.016	1:2	SMT	SHTS
WEIGHT	SCALE								
0.016	1:2								
SMT	SHTS								
	95								


765-95-74

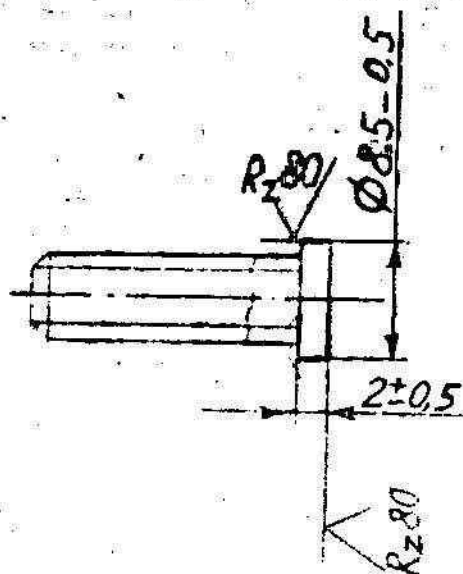

Ум. Нейн. (Hodnuc budnec)

APPROVED	<i>[Signature]</i> M VASU	765-95-74							
CHECKED	<i>[Signature]</i> PRASAD								
CONTROLLERATE OF INSPECTION (ICV)		BOLT							
		Workpiece bolt M6x16 46.019 GOST 7798-70							
		<table border="1"> <tr> <td>WEIGHT</td> <td>SCALE</td> </tr> <tr> <td>0.0045</td> <td>2:1</td> </tr> <tr> <td>SHT</td> <td>SHTS</td> </tr> <tr> <td colspan="2">81 OF 84 95</td> </tr> </table>		WEIGHT	SCALE	0.0045	2:1	SHT	SHTS
WEIGHT	SCALE								
0.0045	2:1								
SHT	SHTS								
81 OF 84 95									

52-56-59L

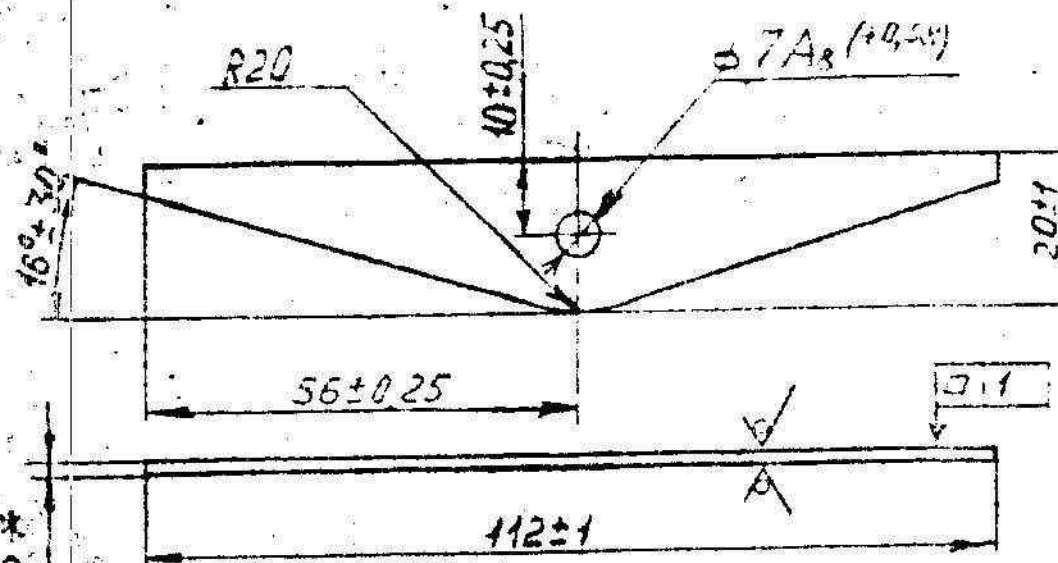

EQ. MATERIAL ADDED IN THE DRAWING	NATURE AMENDMENT	ISSUE	DATE
(A)			

1. Alternate material is steel 10K1 GOST 1050-74.


2. * Dimension is given for reference.

(A) EQ. MATERIAL:- STEEL SHEET GRADE D. TO IS: 1079, IS: 4030

APPROVED	<i>[Signature]</i> M VASU	765-95-75	
CHECKED	<i>[Signature]</i> PRASAD		
CONTROLLERATE OF INSPECTION (IC V)		STRAP	
		Sheet A-2.0 GOST 19904-74 5-11-10 GOST 16523-70	
		WEIGHT	SCALE
		0.018	1:1
		SHT	SHTS
			95

765-95-76

R.150/

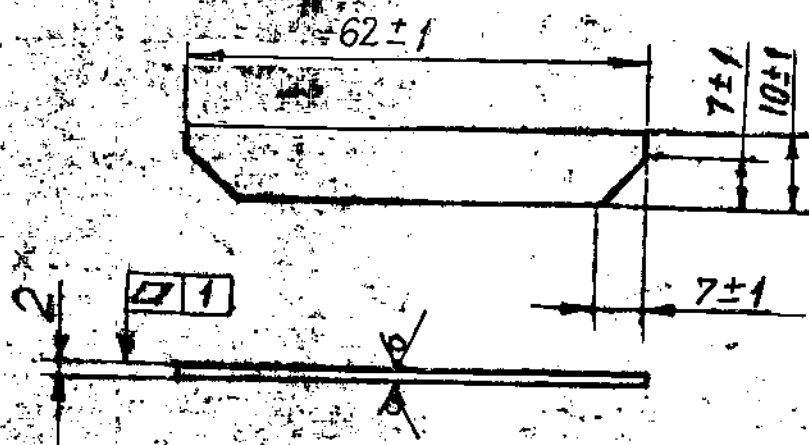


1. Alternate material is steel. 10Kn GOST1050-74.
2. *Dimension is given for reference.

765-95-76

APPROVED	 H VASU	765-95-76	
CHECKED	 PRASAD		
CONTROLLERATE OF INSPECTION (ICV)		GASKET	
		sheet A2.0 GOST 19904-74 5-II-1-10 GOST 16523-70	
		WEIGHT	SCALE
		0.0091	1:1
		SHT	SHTS
			95

765-95-85

R-160
V(N)

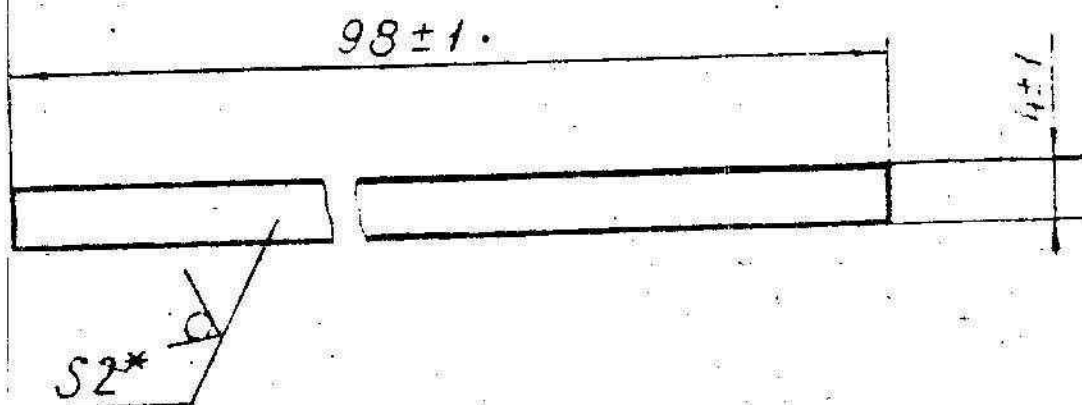


1. Alternate material is steel 10Kn GOST 1050-74.
2. *Dimension is given for reference.

APPROVED	<i>[Signature]</i> H VASU	765-95-85	
CHECKED	<i>[Signature]</i> V. P. Rubt		
CONTROLLERATE OF INSPECTION (ICV)		SPACER	
		WEIGHT	SCALE
		0.006	2:1
		SHT	SHTS
		95	
		Sheet A.2.0 GOST 19904-74 511-T-10 GOST 16523-70	

06-96-99L

R220

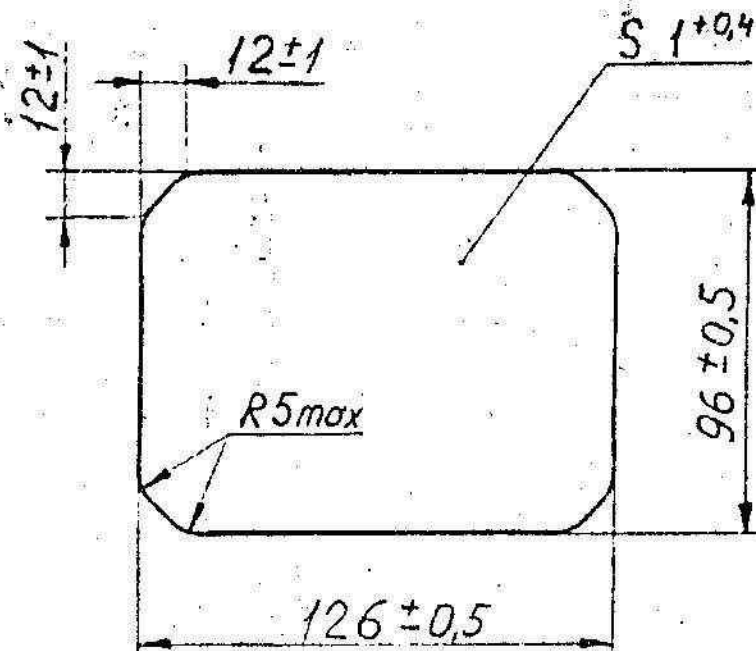

1. Alternate material is polymethylmeta crylate MCOM, granulated transparent, red OST 6-01-67-77.
2. Unspecified casting radii should not exceed 1mm.
3. Knock-out traces not exceeding 0.3mm in the part body are allowed.
4. Other requirements are as per OST.4ГО.005.051.

APPROVED

И. ВАСИ

CHECKED

П. П. П. П.

765-95-90

CONTROLLERATE
OF
INSPECTION
(ICV)

RED LIGHT FILTER

MCH-П red. grade-1
GOST 12271-76

WEIGHT

SCALE

0.016

1:2


SHT

SHTS

95

FORMAT	ZONE	REF. NO.	DESIGNATION	DESCRIPTION	QTY	REMARKS
				Technical papers		
12			765-95-Cb116 C5 PT NO LV2/RCV 6230-000334 (A)	Assembly drawing		
				Parts		
12	1		765-95-61.	Holder	1	
11	3		765-95-74	Bolt	2	
				Standard Items		
				Bolt M6x16 46,019		
				GOST 7798-70 (Blank for		
				765-95-74)		



00358-10		(A)	DS CAT. PT. NO ADDED FOR DRG. NO. 765-95-Cb 116 NOMENCLATURE WAS HOLDER & LIGHT ASSY.	
RKB 16 JUN 83	RKS. CD/M			
DC(I) No DATE	ISSUE	NATURE OF AMENDMENTS	DC(I) No DATE	ISSUE
DRN.	M/G-1	(A) HOLDER LIGHT	DATE: 12-09-95	
TCD.			USED ON	
CHD	Cw	765-95-cb 116	SHEET	SHEETS
APPD		(A) PART NO. LV2/RCV-6230-000334	1	OF 1
CONTROL RATE OF QUALITY ASSURANCE (INFANTRY COMBAT VEHICLES)				

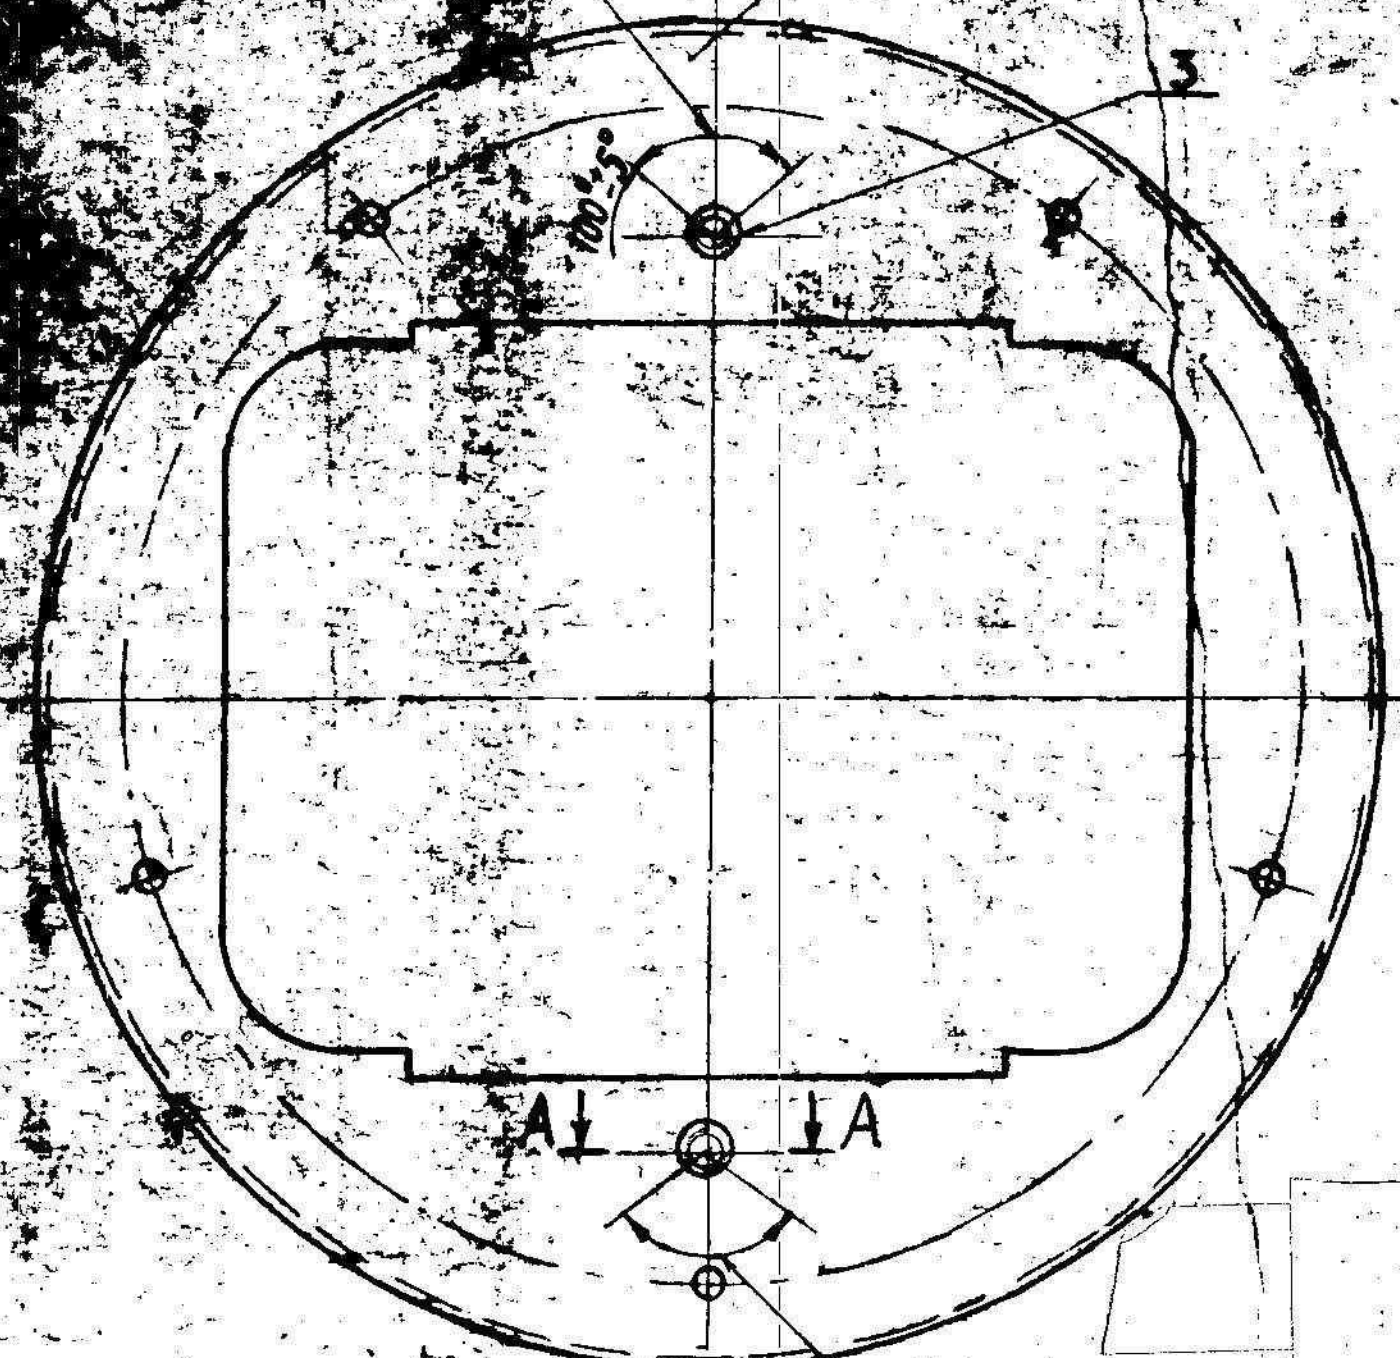

1. Welding is not allowed in sector 6.
2. Coating: Chemically, parkerized, chrometized.
 Primer ϕ 1-03 HK GOST 9109-81.
 Enamel $\Pi\phi$ -223, black, GOST 14923-78.

00358- ICV JUN95	② RICKS COM	DSCAT PEN. ADDED. NOMENCLATURE WAS HOLDER LIGHT ASSLY
DCU No DATE	ISSUE	AMENDMENTS

APPROVED	M VASU	765-95-CD116C5	PL No. L-2/RCV 6232-00334 ①
CHECKED	PRASAD		
CONTROLLERATE OF INSPECTION (ICV)		HOLDER LIGHT	WEIGHT
			0.166
			SCALE
		SHT	SHTS
		44 OF 84	

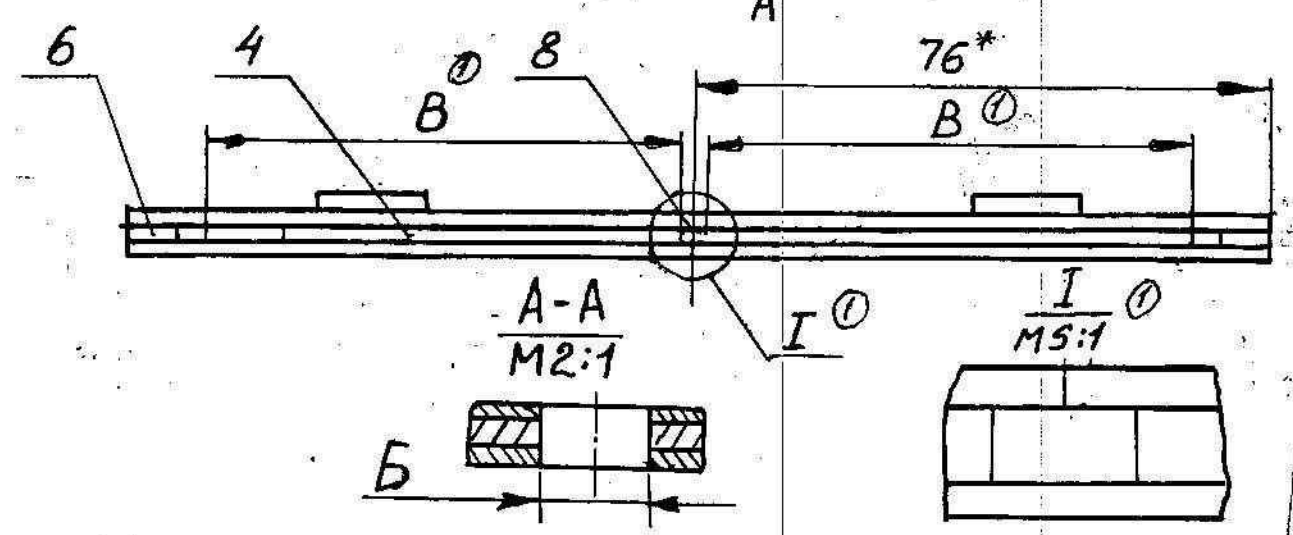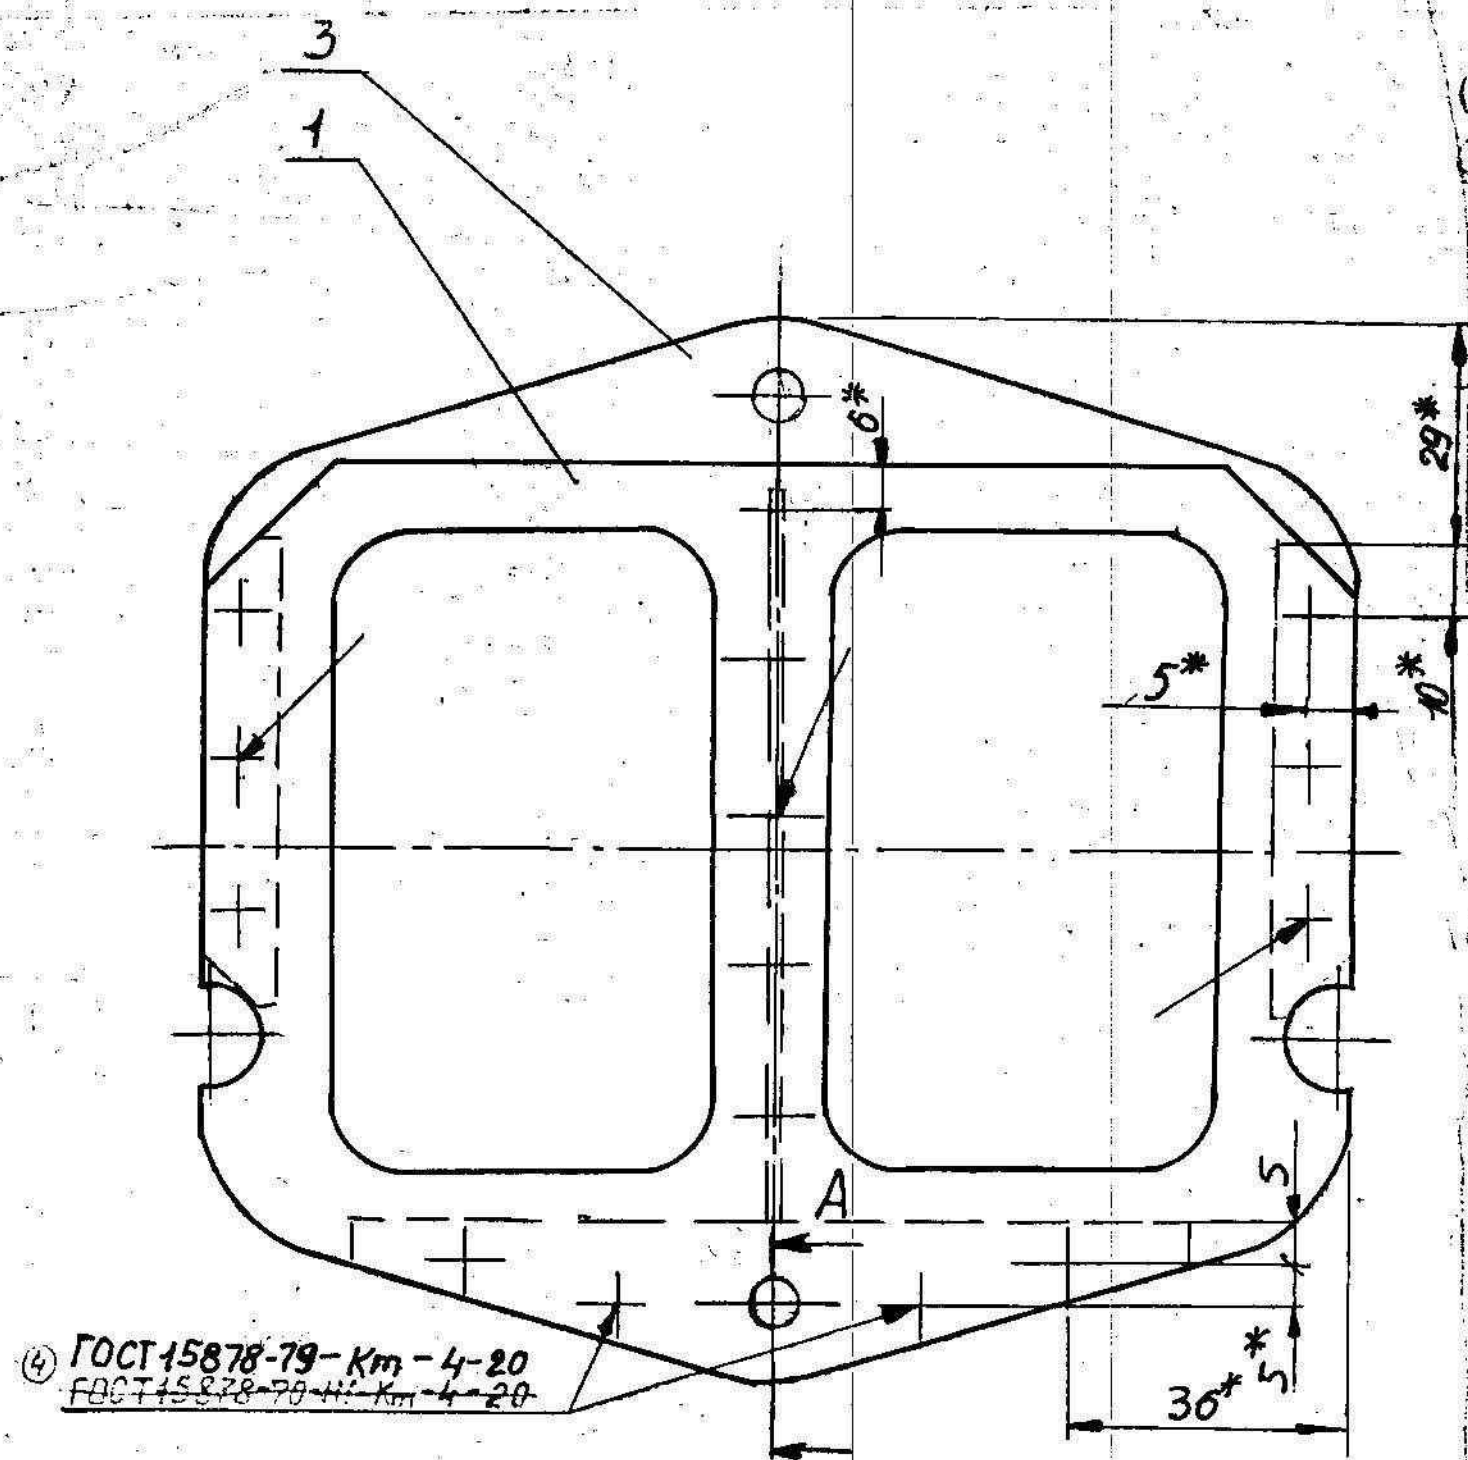


1. Coating: Chemically, parkerized, chromitized,
Primer ϕ Л-03 K GOST 9109-81.
Enamel n ϕ -223, black, GOST 14923-78.
2. Edges of openings, Ref. No.6 and straps, Ref. No.4 should be aligned along the contour with the edges of frame, Ref. No.3 and cover plate, Ref. No.1. Misalignment of edges within the limits of tolerance on part is allowed.
3. Preliminary welding of part, Ref. No.6,4 and 8 to frame, Ref. No.3 in the intervals of the basic welding pitch is allowed.
4. Displacement of axes of holes ϕ of part, Ref. No.1,3 and 4 should not exceed 0.25mm.
5. *Dimensions are given for reference.
6. Check dimensions of openings with gauge having the following parameters: $B=63.5\text{mm min.}$, $r=1.5\text{mm min.}$ Gauge should freely pass without any jamming along the entire length of opening up to the strap, Ref. No.4.

APPROVED		765-95-c6 117c6		
CHECKED				
CONTROLLERATE OF INSPECTION (ICV)		FRAME ASSEMBLY		WEIGHT
		ASSEMBLY DRAWING		SCALE
		SHT	SHTS	

LINE NO	ZONE	REF NO	DESIGNATION	DESCRIPTION	QTY	REMARKS
				<u>Technical papers</u>		
12			765-95-c5118c5	Assembly Drawing		
				<u>Assembly Units</u>		
(A) 12	1		765-95-c5116	Holder LIGHT	1	
			PC No. LV2/Rcv 6230-000334(A)			
12	2		765-95-c5117	Frame, Assembly	1	
				<u>Parts</u>		
11	4		765-95-73	Red light filter		1 Piece may be replaced by Ref. No. 5
11	5		765-95-90	Red light filter		1 Piece may be replaced by Ref. No. 4
				<u>Standard Items</u>		
	6			Nut M6,354 -I 019		
				GOST 3032-76	2	
	7			washer 6x1,01,019 or		
				6x1,02,019 GOST 11371-78	2	
				EQ. MAT. C-30 TO IS:1570-79 (Ref. DC(1) 00957-1CV)		
	8			Washer 6T65F 06		
				GOST 6402-70	2	

APPROVED	<i>[Signature]</i> M VASU	765-95-c5118
CHECKED	<i>[Signature]</i> PRASAD	
CONTROLLERATE OF INSPECTION (ICV)		DIGITAL EXTENSION PIECES
		WEIGHT SCALE
		SMT / SMTS /

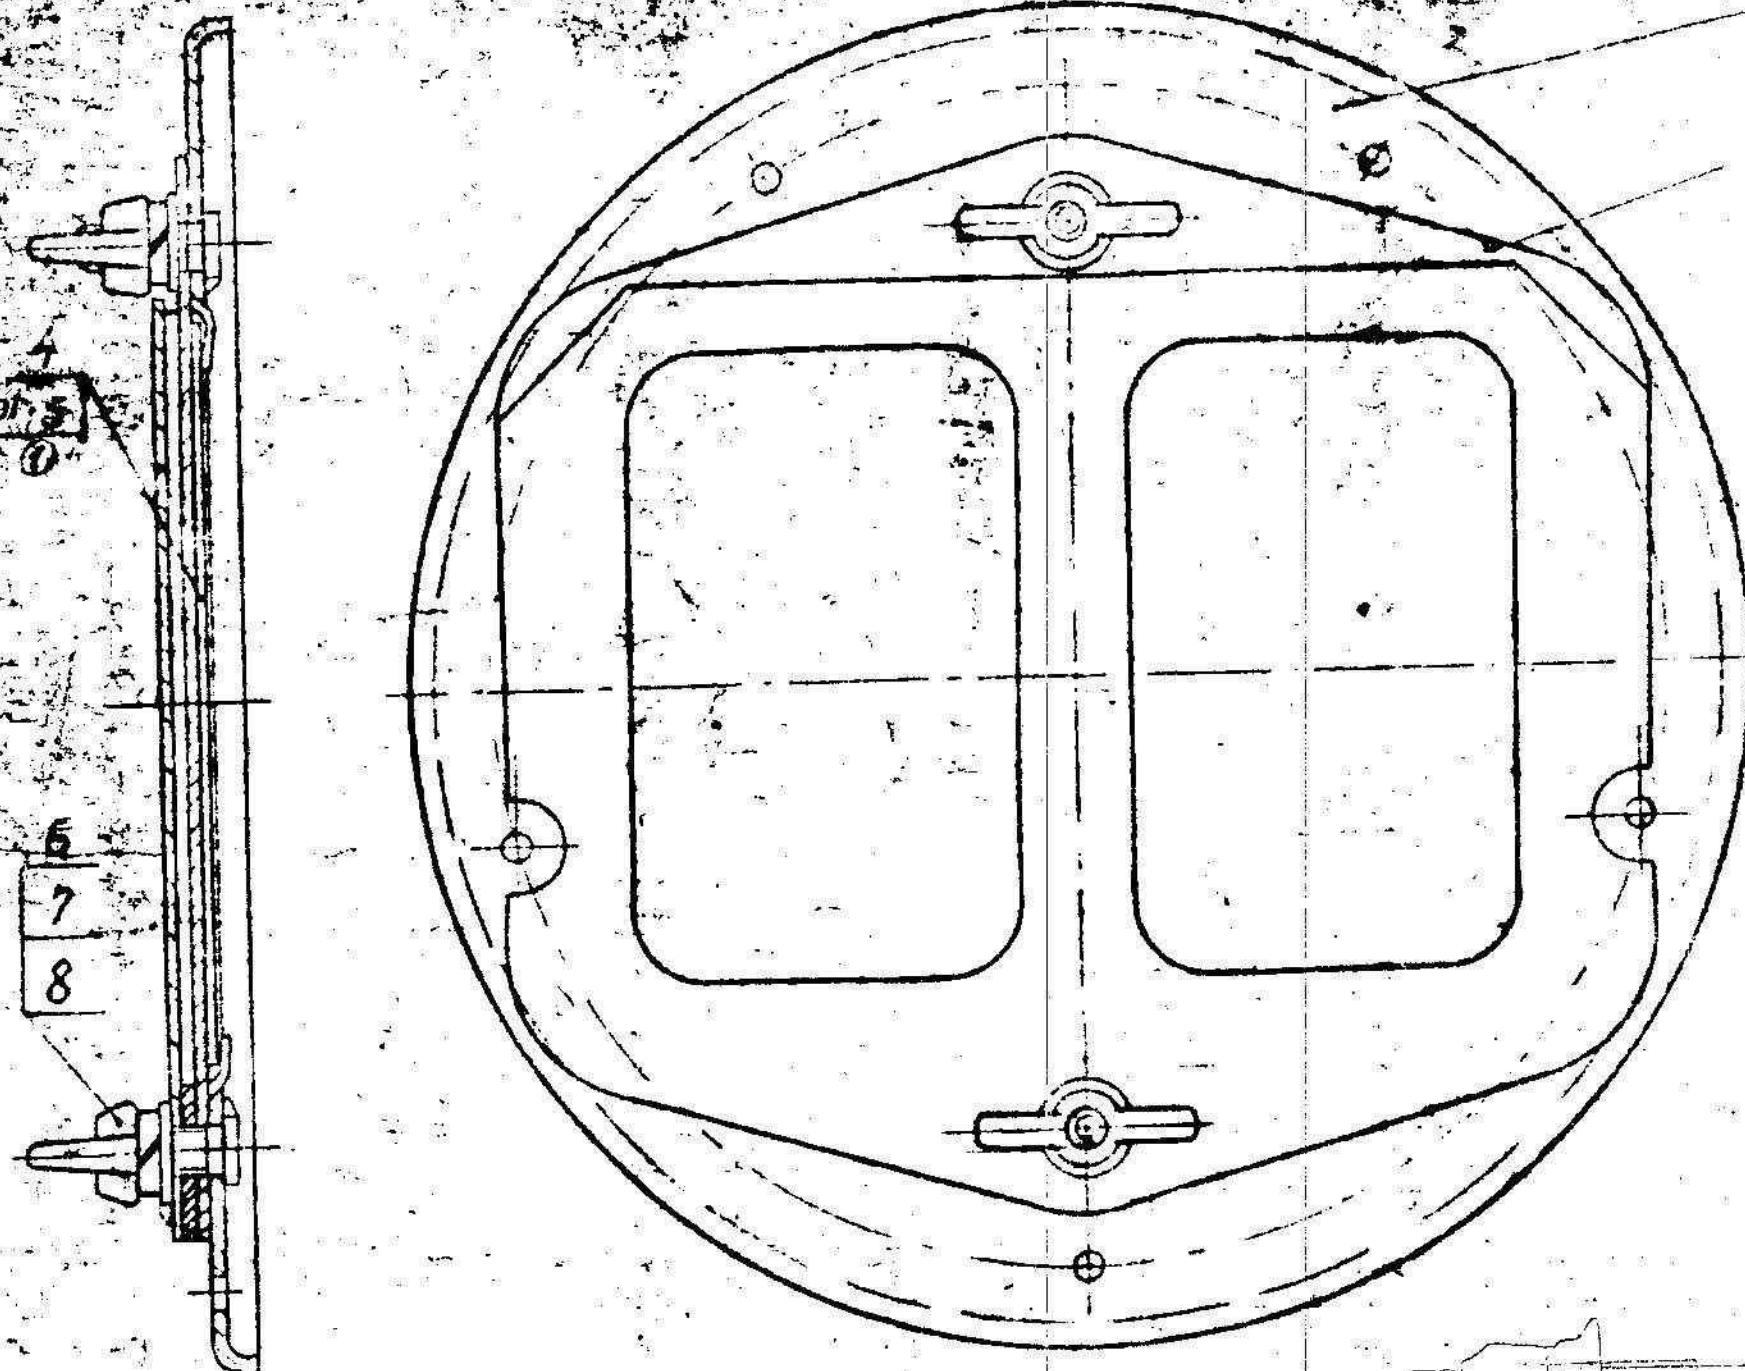

- 1) Edges of frame, Ref. No. 2 should be bent tightly upto stop in the light filter after the light filter mounting.
- 2) Displacement of light filter, Ref. No. 4 with respect to frame, Ref. No. 2 is not allowed.
- 3) Mount the light filter with unpainted side out when use is made of a light filter made of painted colourless acrylic plastic.

APPROVED	H VASU	765-95-c8118cb	
CHECKED	P. K. S. P. K. S.	DIGITAL EXTENSION PIECES	WEIGHT SCALE
CONTROLLERATE OF INSPECTION (ICV)			0.270 1:1
			95