


765-34-41

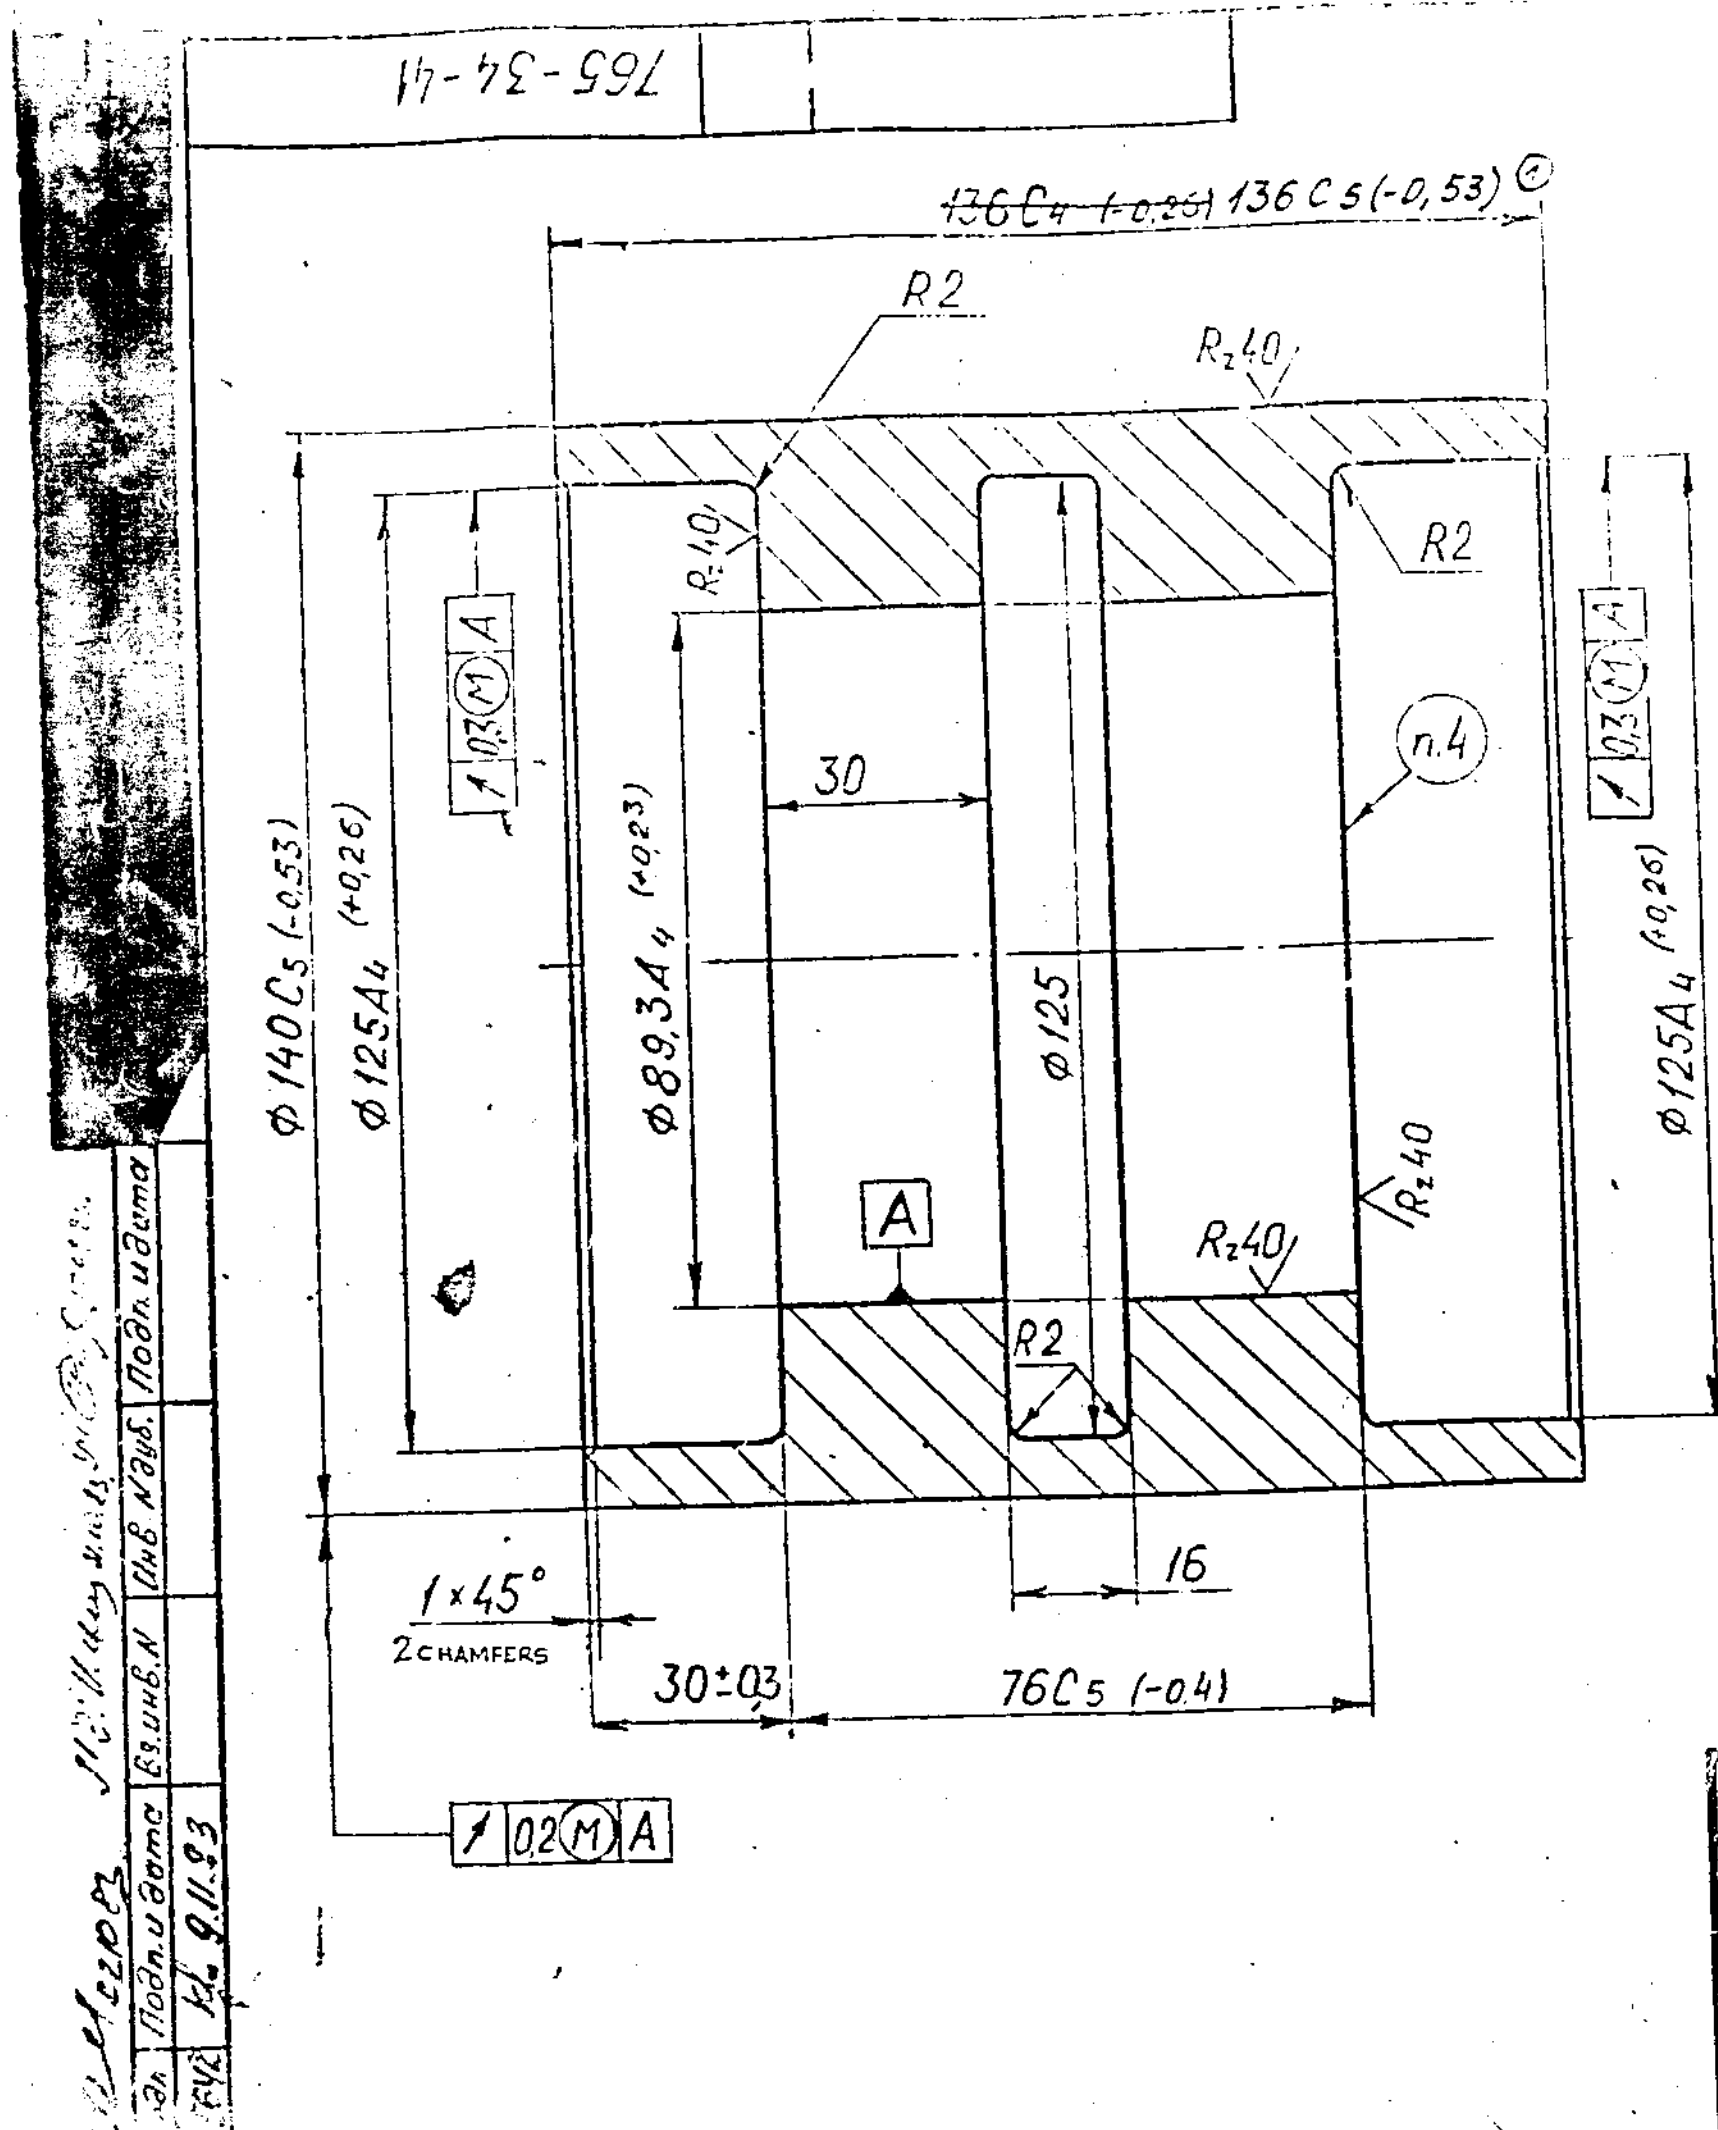

TECHNICAL CONDITIONS

1. Substitute for material - AEB, B95T POST 4784-74.
 2. Thermally treat to state T.
 3. Unspecified limit deviations of sizes: for holes - according to A₇; for shafts - according to B₇; others - according to ±CM₇.
 4. Mark manufacturer's conventional indcx. Use lettering NO-5 to NO-8 POST 2930-62.
 5. Other requirements - according to TV 38.00411-77.
- ④ EQ. MATERIAL: GRADE 24345 TO IS: 733-83 'WP' CONDITION

R:EO, (V)

00765-120	④	EQ. MATERIAL ADDED.
V Romo	Am	
15.05.2000		
DCC/NO	ISSUE	NATURE OF AMENDMENT
DATE		

APPROVED	<i>[Signature]</i>	765-34-41	
CHECKED	<i>[Signature]</i>	HUB	WEIGHT/SCA
CONTROLLERATE OF INSPECTION (ICV)			1.98 1
		16T GOST 4784-74	SRT SRTS

Ref. No.	Designation	Description	Qty	Remarks
	765-34-c6124CB	<u>Documents</u> Assembly drawing		
1	765-34-41	<u>Parts</u> Hub	1	
2		<u>Materials</u> Rubber 34 PM-14	2.56 kg	

APPROVED	<i>[Signature]</i>	765-34-c6124					
CHECKED	<i>[Signature]</i>		WEIGHT SCALE				
CONTROLLERATE OF INSPECTION (ICV)		SOLID TYRE 200x136	<table border="1"> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>				
			<table border="1"> <tr> <td> </td> <td> </td> </tr> </table>				