


I H/A 172.40.070 cbc

1115

30 ✓

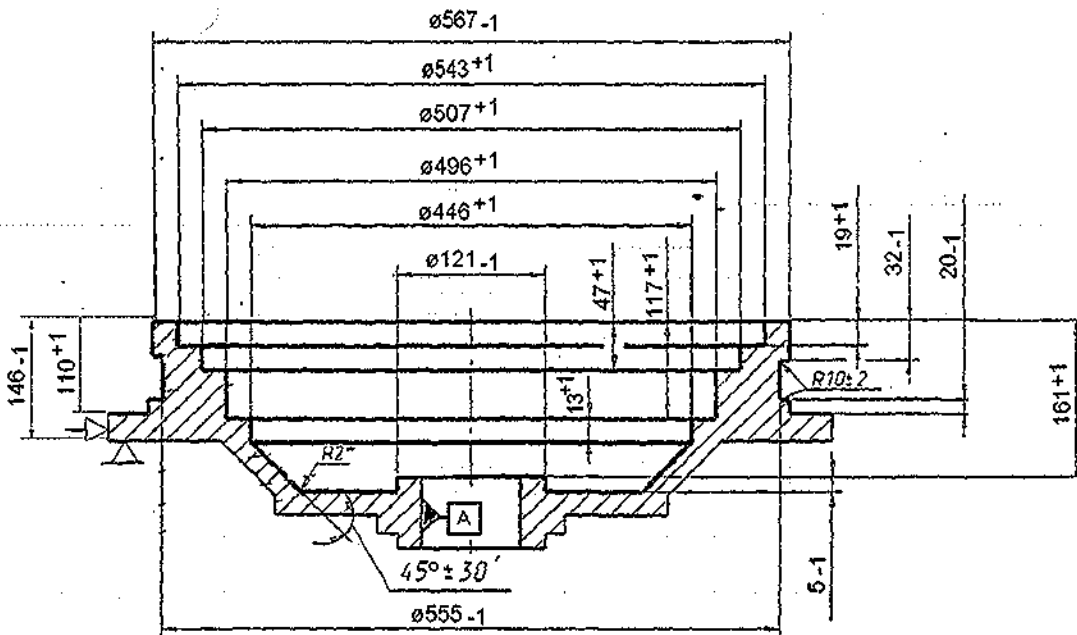


NOTE:

1) RUN OUT OF ALL INSIDE & OUTSIDE DIAMETER WITH REFERENCE TO 'A' SHOULD BE WITH IN 0.5mm

| | |
|-----------|----------------------------------|
| DRG. NO. | : 172.40.372/SMF, RH REAR FLANGE |
| OPN. NO. | : 010 TURNING |
| MATERIAL | : STEEL FORGING 30XFC |
| HARDNESS | : 280 BHN Max. |
| SHEET NO. | |
| | NOT TO SCALE |

| | | |
|--------------------|--------------------|--------------------|
| <i>[Signature]</i> | <i>[Signature]</i> | <i>[Signature]</i> |
| PREPARED | CHECKED | APPROVED |
| <i>[Signature]</i> | <i>[Signature]</i> | <i>[Signature]</i> |
| JWM/TRG | CM/TRG | JWM/TRG (MS) |

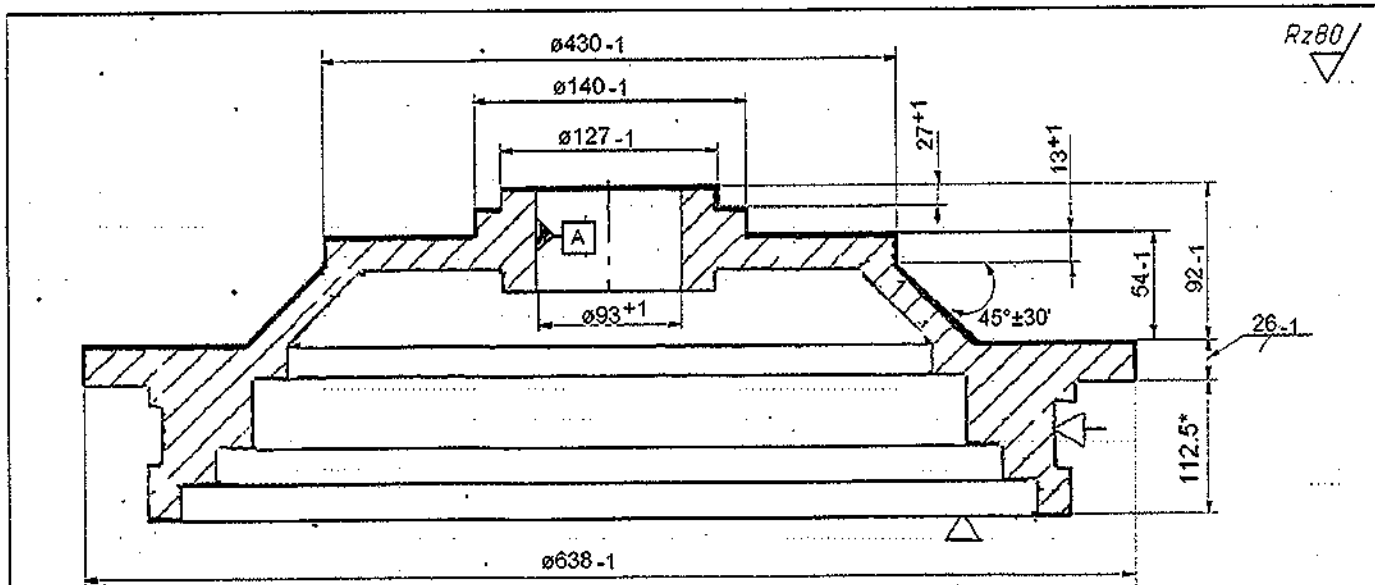

NOTE:

- 1) RUN OUT OF ALL INSIDE & OUT SIDE DIAMETER WITH REFERENCE TO 'A' SHOULD BE WITHIN 0.5 mm
- 2) * - DIMENSION FOR REFERENCE

| | |
|-----------|----------------------------------|
| DRG. NO. | : 172.40.372/SMF, RH-REAR FLANGE |
| CPN. NO. | : 020 TURNING |
| MATERIAL | : STEEL FORGING 30XTC |
| HARDNESS | : 280 BHN Max. |
| SHEET NO. | |
| | NOT TO SCALE |

| | | |
|--------------|------------------------|-------------------------------|
| PREPARED | CHECKED | APPROVED |
| Jmm/TRH | D. YUVARAJ CM / TRG | K. DURAJARAJ Jmm/TRG (HOS) |