


DS CAT No.
5360-041584

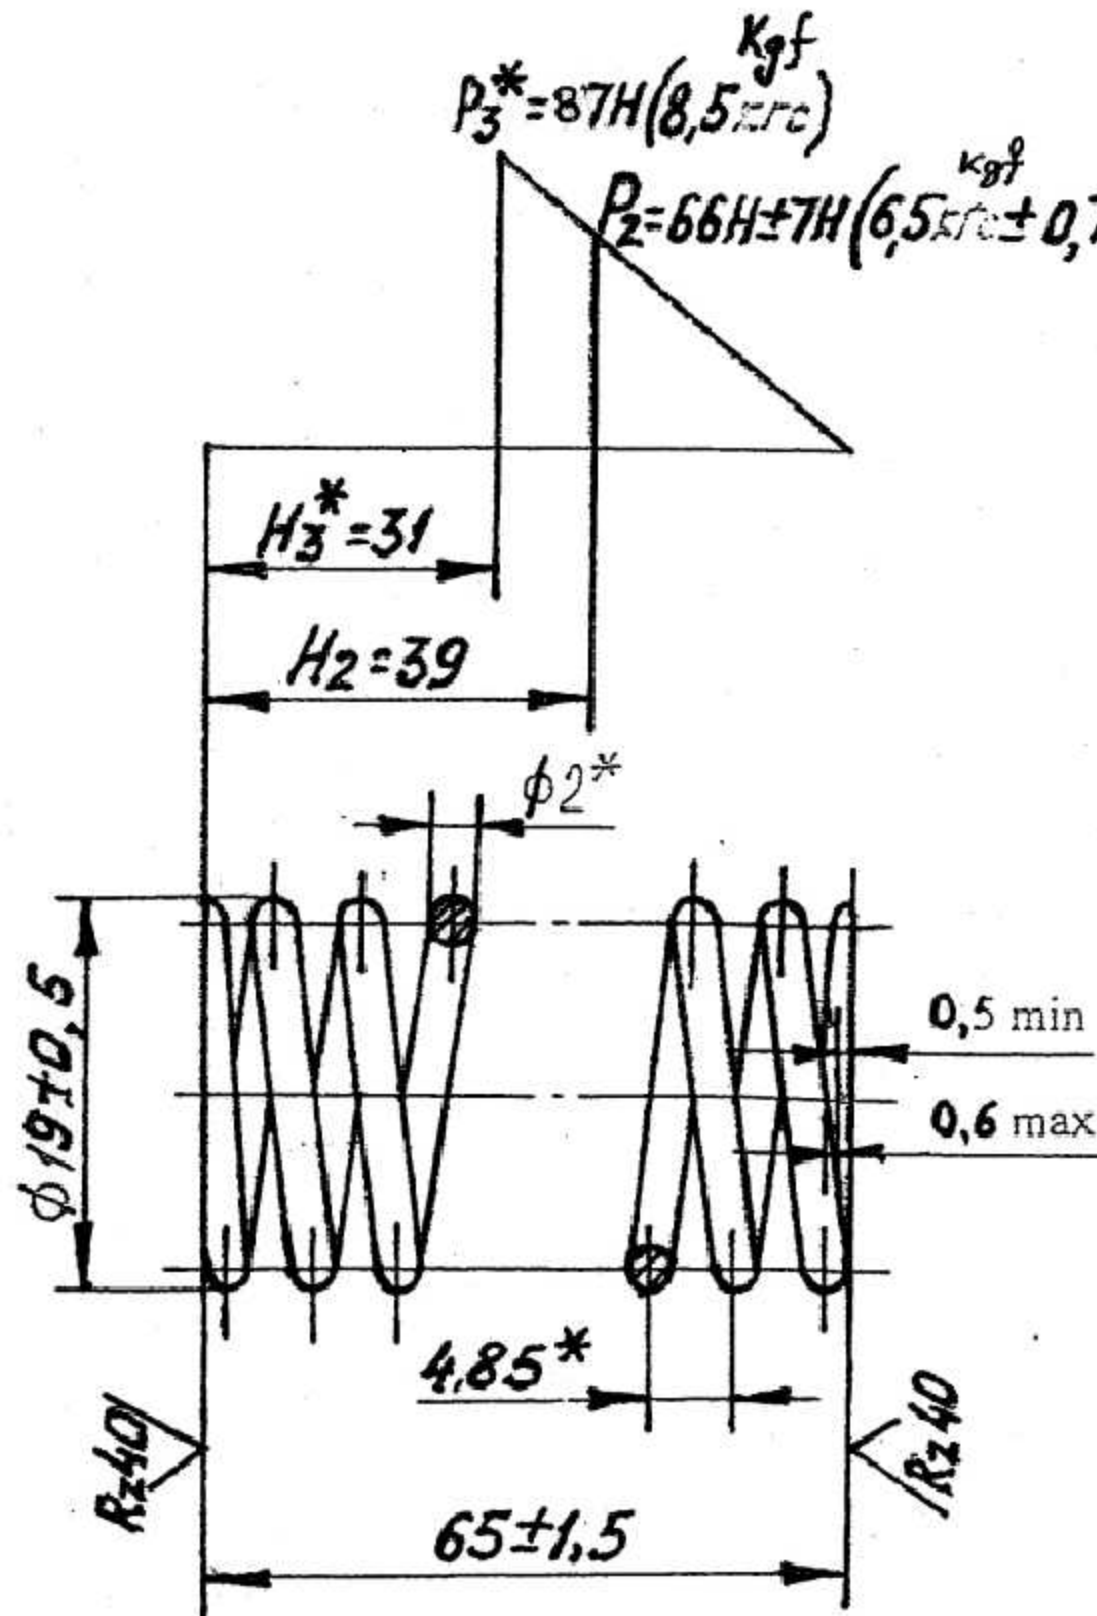

- 1- $G^* = 78.5 \text{ GPa} (8000 \text{ kgf/mm}^2)$.
- 2- $\tau_3^* = 58 \text{ MPa} (59 \text{ kgf/mm}^2)$.
- 3- DIRECTION OF COILING - RIGHT.
4. $n = 13$.
5. $n_1 = 14.5$.
- 6 - TO BE CRAG-TESTED IN THE DURATION OF 24 HOURS.
- 7- COATING - CADMIUM 9, CHROMIUM.
- 8* - DIMENSIONS AND PARAMETERS FOR REFERENCE.
- 9 - TO BE MARKED AND K TO BE STAMPED ON TAG.
- 10 - OTHER TECHNICAL REQUIREMENTS AS PER GROUP 2, CLASS II GOST 16118-70.

जांची गई सही प्रति
CERTIFIED CORRECT COPY OF
मुद्रित रेखाचित्र की
SEALED DRAWING AS ON

कृते नियंत्रक गुणता
FOR CONTROLLER OF QUALITY
आश्वासन (क वा आ) आवडि चेन्नै 54
ASSURANCE (AVA) AVADI CHENNA 54

13/5/13

✓(✓)

1. $G^* = 78.5 \text{ ГПа} (8000 \text{ кгс/мм}^2)$.
2. $\tau_3^* = 58 \text{ МПа} (59 \text{ кгс/мм}^2)$.
3. Направление навивки - правое.
4. $n = 13$.
5. $n_1 = 14.5$.
6. Испытать заневоливанием в течение 24 часов.
7. Покрытие - Кд9.хр.
8. *Размеры и параметры для справок.
9. Маркировать Ч и клеймить К на бирке.
10. Остальные технические требования по 2 группе, II классу ГОСТ 16118-70.

ID = 122
01-02-02

ALT. MATL:- IS: 4454 - Pt-I-1981 STEELWIRE GR 3

Замени №1
REPLACEMENT No. 1

11.7.12	0091-AYA	ALT. MATL. ADDED			ASSY DRG: 2A26C602-48C5
29.2.12	0086-AYA	NOM. AMENDED & D.S. CAT. No. ADDED.			CQA (AVA) AVADI
16-9-06		SCANNED WITHOUT CHANGE			
DATE	AUTHORITY	NATURE	Sign AHSP	Sign DO	ESTD. MASS : 0.02 kg
AMENDMENT					MATL : WIRE 6-2-2
DRG SEALED (PROV)					GOST 9389-75
DC No. 0011-AVA DT 27.3.07					DO CQA (AVA)
APPROVED: [Signature]					DESIGN No.
SPRING, HELICAL, COMPRESSION					PART No. 2A26-02-318
					SHT SHTS
					D S CAT No. 5360-041584
					SHT SHTS