


D.C. 34808-A

Toleranser enligt ISO / Tolerances acc. to ISO		
Bemärkt och tolerans Basic size and tolerance	Gränsmått / Limit deviation	
	Över / upper	Under / lower

15-03-02	DC 36726-A	WIDTH 100 ± 5 WAS 75 ± 5 & THICKNESS OF FOIL 0.08 ± 0.01 WAS 0.08	44
27-5-86	D.C. 36121-A	DIMENSION 500 ± 5 WAS 800 ± 75 ± 5 WAS 167. NOTE ADDED & IN DESIGNATION COLUMN REFERENCED TO B & REFERENCE MASS DELETED.	45
15-03-02	De 36819-A	Under note B99 (11)	

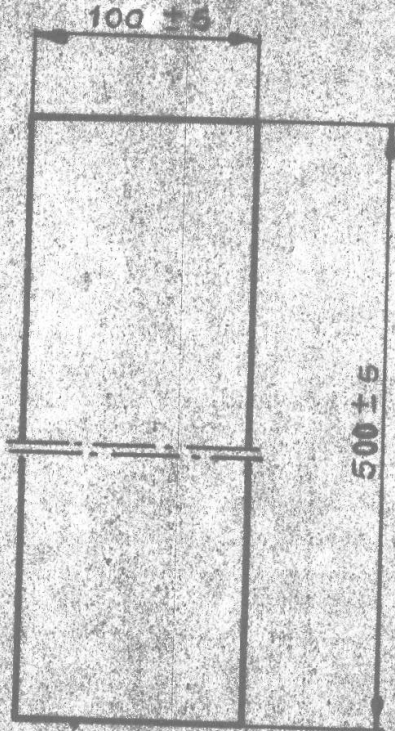

NOTE:-

i) THICKNESS OF FOIL 0.08 ± 0.01 (0.08 TO 0.09)

ii) WEIGHT OF FOIL

FOR CHARGE B - 40g ± 1g (ONE STRIP)

FOR CHARGE B - 40g ± 1g (TWO STRIPS)

iii) Linear dimension viz length and width are nominal dimension for reference only. These can be suitably adjusted to maintain the mass stipulation of 40g ± 1g which is mandatory.

3-3-90	D.C. 34808-A	DRG SEALED PROV.	1/1	AV
10-5-85	SAZA 261-SEC.	MASS WAS VIKT.	1/1	APPD
DATE	AUTHORITY	REVISION	AKS D. S.	FOR EQA (A)
			SIS	ANSP - CQA(A) KIRKEE
Andr. nr / Rev. No.	Laga / Zava	AD nr och ändringsbeskrivning / Revision order No. and description of the revision	Datum / Date	Godkänd / Approved
Där ej annat anges gäller / Unless otherwise stated the following applies				
Måttnamn / Dimension / Name / Dimension	Skicka till / Send to / Ship to	Material / Material	Beställning / Designation	SA91-1-
Ytbehandling / Surface treatment	Händskador / Film roll	Avst. Dept.	Utgångsvara / Stock material	
Toleranser för tillagning och packning enligt T2-3 / Tolerances for clipping and packaging acc. to T2-3	Avvikelsegränser enligt T2-3 klass / Deviation tolerances acc. to T2-3 class	Datum / Date	Placering / Position	
Toleranser för utskärning enligt T2-4 / Tolerances for cutting acc. to T2-4	Avvikelsegränser enligt T2-4 klass / Deviation tolerances acc. to T2-4 class	Skala / Scale	Placering / Position	
Ytbehandling / Surface finish		Utgångsvara / Stock material		
Beskrivning / Description	Avkopplingsfolie / De-coppering agent			
		6388122		0A