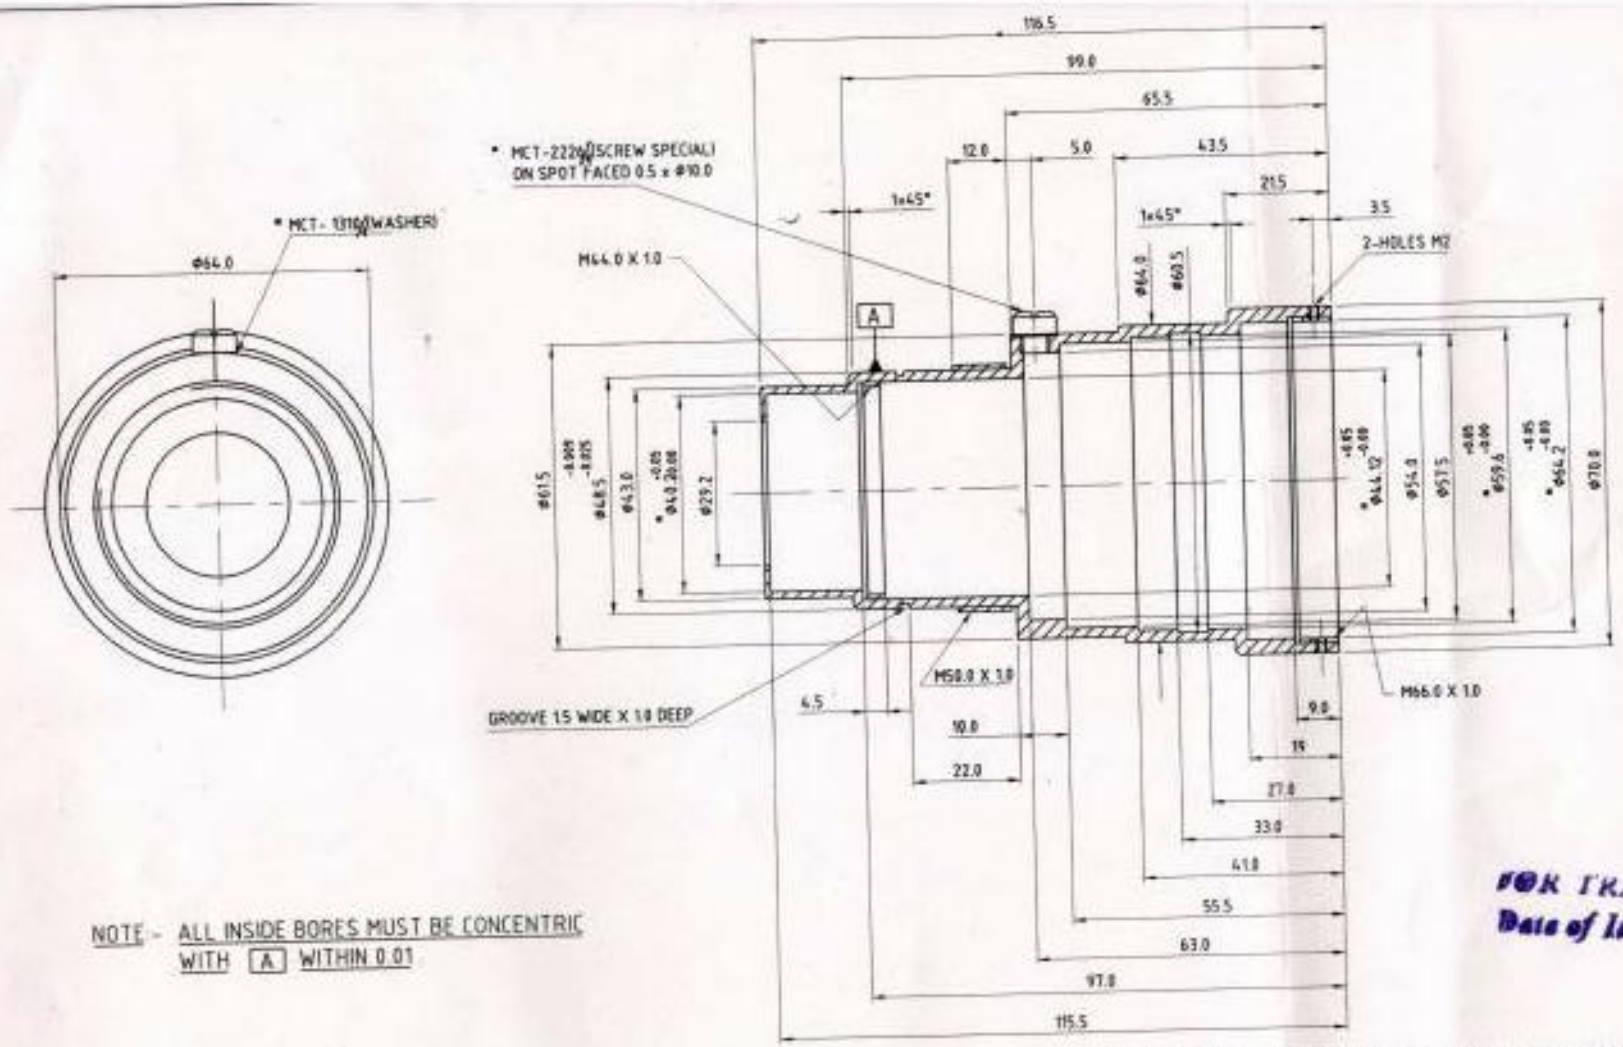

NOTE - ALL INSIDE BORES MUST BE CONCENTRIC WITH [A] WITHIN 0.01

FOR TRADE USE
Date of Issue 21.02.17

MATL. & SPECN - AL. ALLOY IS:617-4600(A6) M-1975 II FOR CASTING.
ALT. MATERIAL AL. ALLOY 24345 WP IS: 733-1983.

TREAT - ANODISED DYED DULL BLACK
VACCUM IMPREGENATION & POWDER COATING OUT SIDE.

ALL DIMENSIONS ARE IN MM.

ORDNANCE FACTORY DEHRADUN	DR. P.C.SINGH	MODIFIED PASSIVE NIGHT SIGHT FOR 12.7 A.D. GUN	DT. 28-09-10 / SCALE NTS
	TR.		MATL. AS ABOVE / TREAT AS ABOVE
	CH. APPROVED	HOUSING O.G.	SHEETS. 1 / SHEET NO. 1
	JWM/DO. WM/P&P DGM/P	AMENDMENDS OFD/DO/002	DRAWING NO. CWC/229/1