


LOAD
DIRECTION

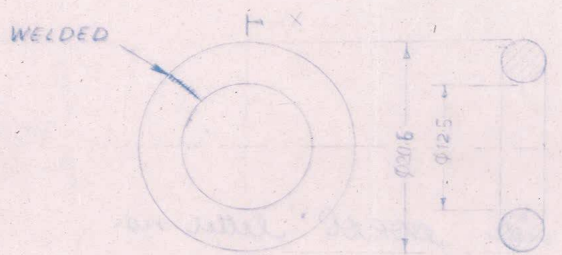

SECTION-XX

Handwritten signature

12-OFF

FINISH : - CADMIUM PLATED TO A MINIMUM THICKNESS OF 0.012 MM TO SPECN. No. IS: 1572-86 Fe/Cd-12 CA

PROOF LOAD : - 200 Kg f (1960 N APPROX)

PACKING : - EACH RING SHALL BE PACKED IN A POLYETHYLENE BAG OF SUITABLE SIZE AND THEN THE MOUTH HEATSEALED. 20 NOS. SHALL BE PACKED IN A SUITABLE SIZE CARTON SHALL BE PACKED IN A C.W.P. (DULY LINED WITH PAPER PACKING WATER PROOF). ONE SAMPLE IN EACH CARTON SHALL BE IDENTIFIED BY A LABEL SHOWING CAT. NO. OF THE STORE, NOMENCLATURE AND ALSO THE TRADE MARK, INITIAL OF THE MANUFACTURER AND THE YEAR OF MANUFACTURE. EACH CARTON SHALL BE MARKED WITH THE INITIALS OF THE MANUFACTURER. BEFORE DESPATCH EACH PACKING CASE SHALL BE LEGIBLY AND INDELIBLY MARKED WITH THE FOLLOWING DETAILS:-

1. NOMENCLATURE, CAT. No. AND THE YEAR OF MANUFACTURE
2. TOTAL No. OF PACKING CASES AND THE NUMBER OF THE INDIVIDUAL PACKING CASE IN A CONSIGNMENT
3. No. OF CARTONS IN EACH PACKING CASE AND THE QUANTITY IN EACH CARTON
4. MASS OF THE PACKING CASE IN Kg.
5. ADDRESS OF THE CONSIGNEE.
6. ADDRESS OF THE CONSIGNOR.

MANUFACTURING PROCESS: GEN-ENGG

DRN	<i>DRN</i>	PAS	MATERIAL: MG WIRE AS PER IS: 280-1972	ADDRDE, AGPA
CHD	<i>4</i>	<i>PRO. OFF</i>	FINISH: AS ABOVE	APPROVED <i>Head</i> HEAD (G.A.)
TRD		<i>PRO. OFF</i>	HEAT TREATMENT: AVERAGE	
COMP		<i>PRO. OFF</i>	HARDNESS: 125-160	
SCALE	2:1			
DIMENSION IN mm				
TOLERANCE:- IS: 2102 Pt(1) MEDIUM				
			RING FOR CONTAINER PSU-36	
				DRG No. AURDE/1458-00 PAS/028/2001

R.N.	DATE	ZONE	AUTHORITY	BRIEF-RECORD	DRG PGD