


DRG. CONVENTIONS CONFORM TO IS: SPECIFICATIONS  
PART NO. DIMS ARE IN mm. UNLESS OTHERWISE STATED.

DC 36524-A.

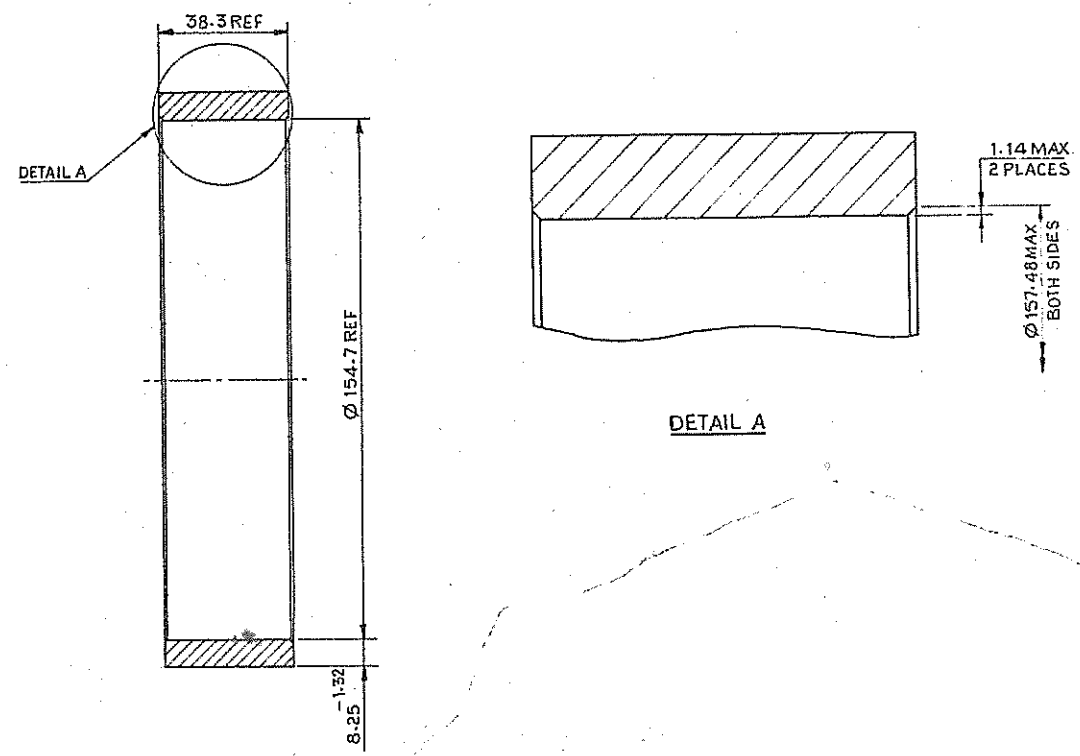

**NOTE:-**

- MAT'L: GILDING METAL, COPPER ALLOY 220. ANNEALED, SPEC. MIL-B-20292-A1968  
INDIGENOUS EQUIVALENT "JSS:4710-01 GRADE II" MECHANICAL PROPERTIES UTS 276 Mpa (MAX) % ELONGATION 35% (MIN) 2" GAUGE LENGTH BEND 180° IN ANNEALED CONDITION.  
\* 2007 edition, Revision No. 4

COPY ISSUED BY CDD/OFAJ  
यह प्रति सी डी डी / ओ एफ. ए. जे.  
द्वारा दी गई है।  
दिनांक: क. का. प्र. / सी. डी. डी.  
Date: *JWIM/DD*  
*17/12/07*

R. NO.	DATE	AUTHORITY	REVISION	ZONE	AHSP   D.O.   S/G.
22-10-99	DC 37535-A		Addition against indigenous material		
01-11-01	DC 36792-A		AGAINST NOTE NO 1 "I.E. MATL" ADDED.		
11-02-99	DC 36524-A		ASSY. DRG. NO. ADDED.		
			DRG SEALED (PROV)		

DRG. SEALED:- 11-02-99 (PROV).

DRN:-	TRD:- <i>(Signature)</i>	CHD:- <i>(Signature)</i>	TRNCHD:- <i>(Signature)</i>
<i>J.S. Saran</i> C.D'MAN	<i>(Signature)</i> O I/C D.O.	SCALE:- NOT TO SCALE	EST. MASS:-
APPD	<i>(Signature)</i> FOR CQA(A)	GAUGE SCHD:-	DATE:-
MATE:- SEE NOTE 1			
PROTECTIVE FINISH:-			

ASSY DRG.	155-1030
	2439A 11002
DESIGNER'S REF	155-1060
PART No.	
D.S.CAT NO	
AHSP:-	CQA(A) KIRKEE

**DRIVING BAND BLANK**

15046