


NOTE:- TOLERANCE AS PER IS : 2102, FINE UNLESS OTHERWISE SPECIFIED.

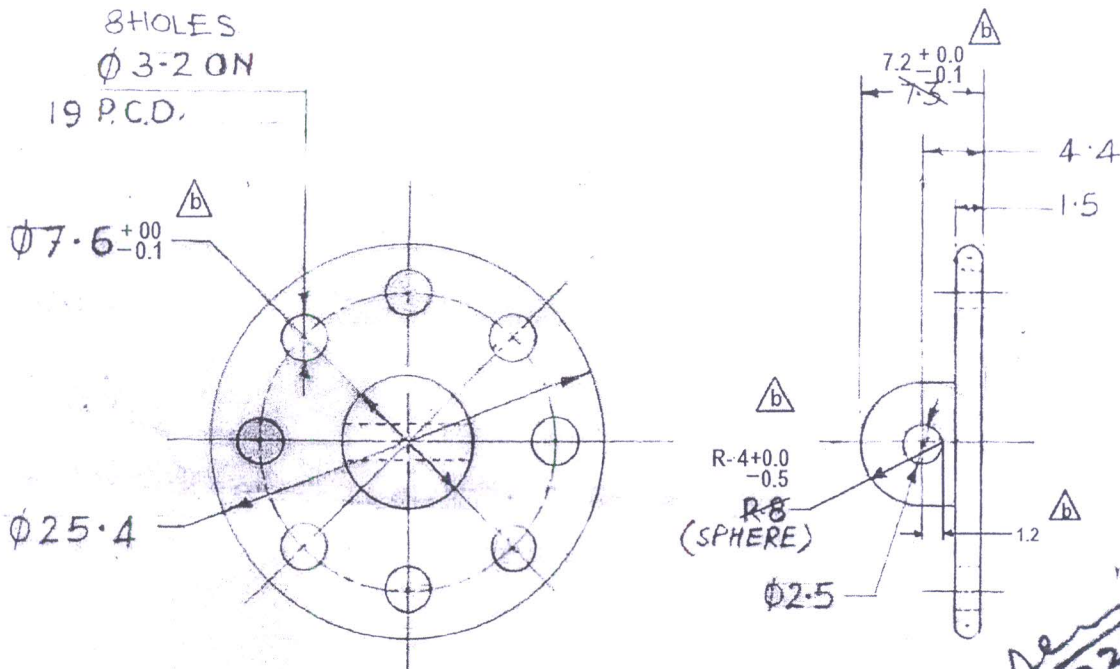


### PACKING CLAUSE:-

EACH CONE BASE - SHALL BE PACKED IN A POLYTHENE BAG OF SUITABLE SIZE AND TIED THE MOUTH OF THE BAG TO BE HEAT SEALED. 20 NOS. THUS SEALED BAGS SHALL BE PACKED IN A SUITABLE SIZE OF CARTON, 10 NOS OF SUCH CARTONS SHALL BE PACKED IN A C.W.P (DULY LINED WITH PAPER PACKING WATER PROOF). ONE CONE BASE IN EACH CARTON SHALL BE IDENTIFIED BY A LABEL SHOWING CAT. No, DESIGNATION OF THE STORE AND ALSO THE RECOGNISED INITIALS OF THE MANUFACTURER. THE PACKING CASE SHALL BE LEGIBLY AND INDELIBLY MARKED WITH THE ADDRESS OF THE CONSIGNEE, CONSIGNOR, CAT. No, NOMENCLATURE OF THE STORE, THE YEAR OF MANUFACTURE, TOTAL NO. OF PACKING CASES AND THE NO. OF INDIVIDUAL PACKING CASE IN A CONSIGNMENT.

b	15-02-19		QMS/PG/PAS/AEP/57 B	AMENDED AS PER CHANGE SHEET No.177		
a	16-12-99	B 4	ADRDE/PAS/AEP/57/B, DT. 13-12-99	PACKING CLAUSE INCLUDED	<i>JKL</i>	<i>SHR</i>
R.No.	DATE	ZONE	AUTHORITY	BRIEF RECORD	O/C	HEAD
					DES	QA

DRN	<i>Sattar Khan</i>	DRD	MATL: STEEL AS PER B. S 3146	ADRDE, AGRA.
CHD	<i>JKL</i>		PT 2: 1975 STANDARD AND 1 GRADE B	
TRD			FINISH: - NJ - CY PLATED AS PER	
COMP	O/C	PGD	IS: 4942-1983, 0.015 mm THICK	
SCALE:-	PROJ. OFFR. <i>JKL</i>	HEAT TREATMENT:-		
2:1	DIV. HEAD	HARDNESS: 310-320 HV		
DIMENSIONS ARE IN MM				
TOLERANCE:-				
IS: 2102, COARSE				
FINE $\Delta$				

CONE BASE



APPROVED

PROG DIRECTOR (Q.A.)

DRG. No.

ADRDE/1367 (a)(b)