


727100-5189 ON

D.S.CAT DIMNS.ARE IN mm.

FOR EXPLANATION OF DIMENSIONING ETC.,SEE
D.D. NOTE SHEET NO.3 (LATEST ISSUE)

NOTE

FOR SPECN. LATEST ISSUE SHOULD BE FOLLOWED.

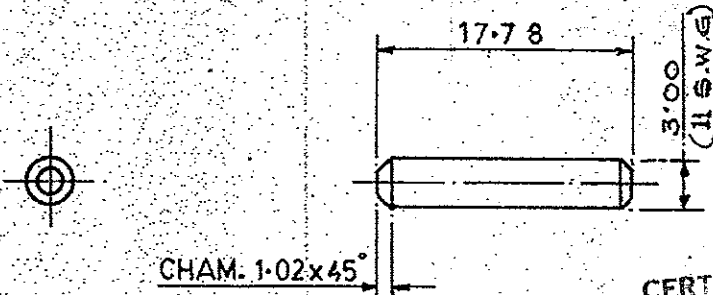

CERTIFIED COPY OF APPROVED DRAWINGS AT THIS DATE 17.1.70

Design & Drawing Office
Ordnance Factory,
Tiruchirappalli-620016

UN CONTROLLED COPY
METRIC

ICR 1335

18-03-98	24061-SA	PROFORMA CHANGED, NEG. RE-TRACED AND DRG. RE-SEALED			
		P PREVIOUS DC.NOS.10448-SA,10669-SA, 10672-SA, 11001-SA,11267-SA,15580-SA,17933-SA,19686-SA, 19727-SA, 21937-SA & 23193-SA			COPY
DATE	AUTHY.	BRIEF RECORD	ZONE	I/C;D.O.	G.O.

SEALED:- D.C. NO. 10448-SA DT.13.4.70. SIGN.

DRN.	CHD.	TRD. <i>Shelsh</i>	COMP. <i>Reeds</i>	AHSP CQA(SA), ICHAPUR
SCALE:- 2:1		EST. MASS.		ASSY. 1005-001669
DT. 18-3-98	<i>Audley</i> I/C;D.O.	APPROVED DT.19.6.67.		

MATERIAL:- PIN STEEL BS970-Pt.3-1991 Gr.070 M20 TO BE FORCE FIT.

H.T./HARDNESS:-	DGNR'S
PROTECTIVE FINISH:- PHOSPHATE TO SPECN. JSS:0465:01-1988 CLASS I OIL FINISH OR ALTERNATIVELY ZINC PLATING TO SPECN. IS:1573 Gr.'C' TYRE 2.	REF. CIA/WPN/224/2
	PART NO.
	DRG. NO.

NOMENCLATURE:- PIN TRAP

D.S.CAT. NO. 5315-001774