39 | 3-016919

D.C.I. 28794-A

1. MAT. TO BE CHECKED ONLY FOR TENSILE STRENGTH

(b) 2. MATERIAL ALLOWED :- STEEL WIRE AS PER GOST 3560-60 OF ANY CLASS BY TAKING UP TO SIZE INDICATED IN THE DRAWING

3. PERMISSIBLE COATING - 2,3 Xp OR Xum ø oc. Xp 11µm. INPREGRATION, TO BE DONE WITH GUN OIL GOST 3005-51.

4 PROTECTIVE TREATMENT : TO BE ZINC PLATED TO SPECIFICATION NO DTD 903 OR TIN PLATED TO SPECIFICATION NO DTD 924.

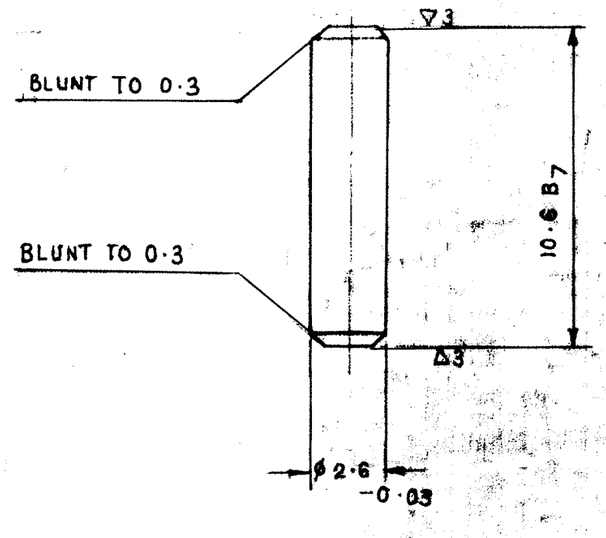

MATL :- IN INDIA STEEL WIRE TO SPCEN, BS:1052-1980 (REAFFIRMED 1999) MILD DRAWN BRIGHT WITH UTS OF 40 Kgf/mm² MIN.

D.S.CAT. No 1390-000376

6·7·11	DC.37284-A	MATERIAL AMENDED	
19·2·11	DC.37275A	MATERIAL AMENDED	
11·2·88	D.C.I. 34325-A	D.S.CAT No ADDED.	
21-4-85	D.C.I. 33748-A	PROTECTIVE TREATMENT NOTE ADDED.	
6·8·82		TRACED WITHOUT CHANGE	
		PREVIOUS D.C.(I) Nos 28794-A, 29162-A, 29221-A & 29806-A	
DATE	AUTHORITY	REVISION	ANSP / D.C. / SIGN

(P)

3-016919 | 53-B-025Y

PIN FOR PART No 36

39

LETTER	MASS	SCALE
A B	0·48	5:1

CHD. | TRD. | M.A.K.

Page-B 429