

D.S. CAT. NO. 1005-007961

DRAWING CONVENTIONS CONFORM TO JSG-0104
 DIMNS. ARE IN mm. GEN. TOL. COARSE IS: 2102


1005-007960-1

1005-007856-1

5360-007550-1

5340-015712-1

1005-007855-1

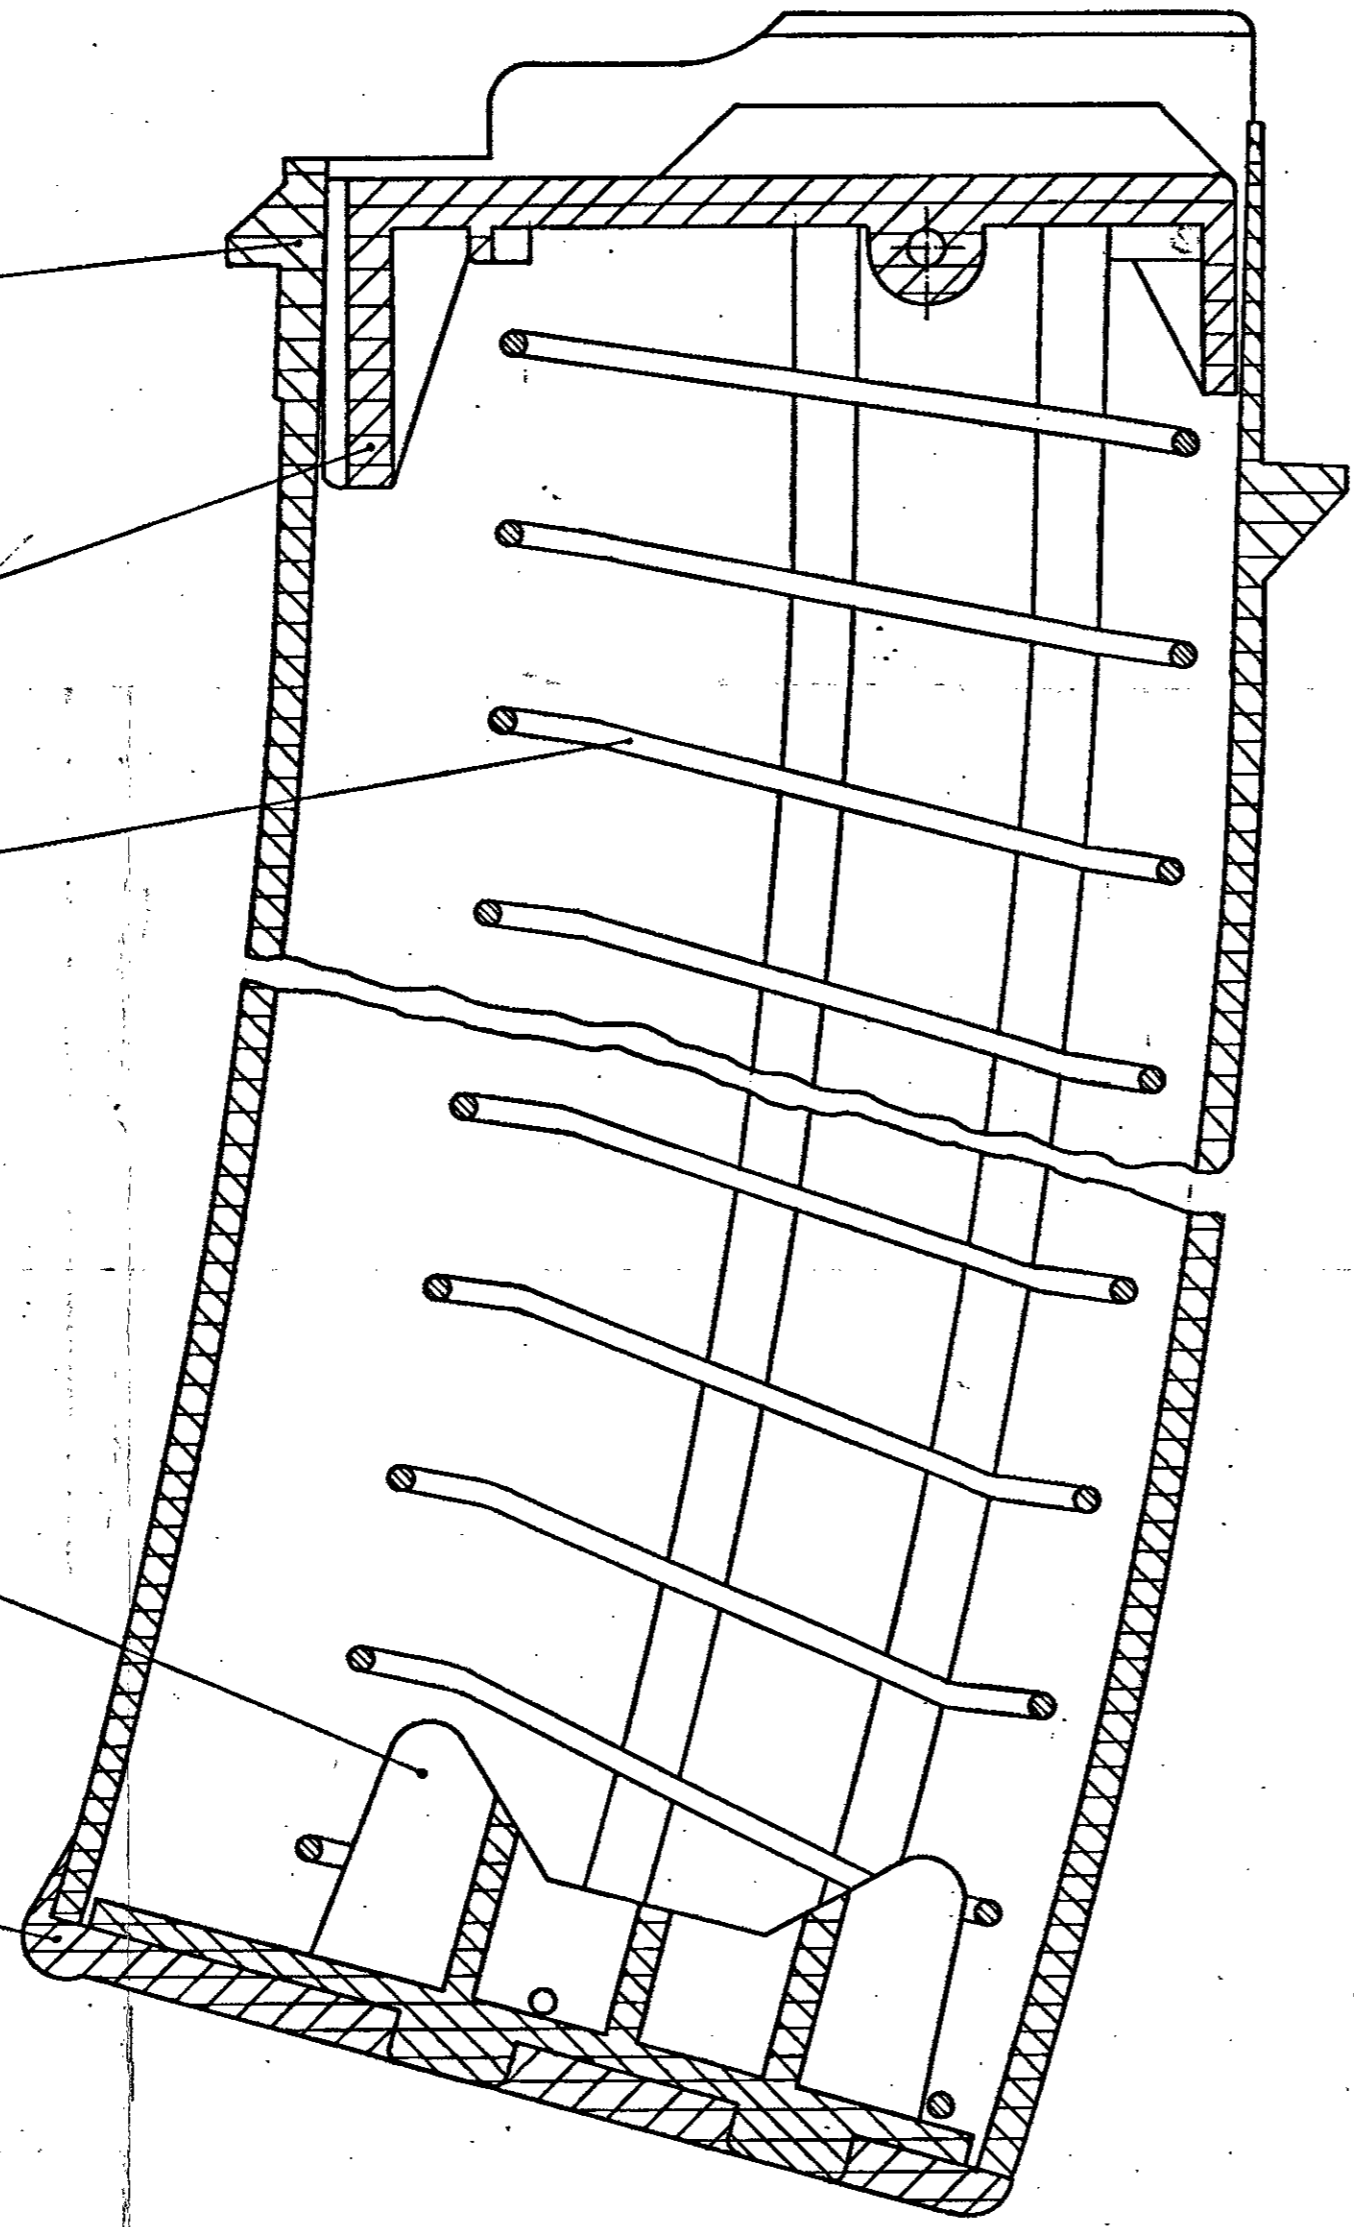

TEST:-
 NO CRACKS AND BLEMISHES TO BE OBSERVED ON MOULDED PART WHEN INSPECTED VISUALLY AND TESTED BY DROPPING ITEM FROM 1 M. HEIGHT ON HARD CONCRETE BED AT

- a) AMBIENT TEMPERATURE
- b) KEPT AT -50°C FOR MIN. 12 HRS
- c) KEPT AT +60°C FOR MIN. 12 HRS

DROP TEST TO BE CARRIED OUT WITH LOADED MAGAZINE (30 DUMMY ROUNDS)

CERTIFIED COPY OF THE STORE DRG/GAUGE DRG/Sch/SPECN/NOTE SHT.
 DATE: 29.07.13, [Signature]

DRN. <i>William</i>		CHD. <i>Kumar</i>	TRD.	COMP.	AHSP, CQA(SA) ICHAPUR
SCALE: 2:1		EST. MASS.		ASSY. 1005-007906	
DT. 19-8-08		<i>Kull</i> I/C; D.O.	DT. 19-8-08	APPROVED. <i>[Signature]</i>	FOR CQA(SA)
MATERIAL:-		H.T/HARDNESS:-		DGNR'S ARDE SK 2689 REF. DET. NO. 285	
PROTECTIVE FINISH:-		PART NO.		ORG. NO. <i>1005-007961</i>	
NOMENCLATURE:-		MAGAZINE, ASSEMBLY (30 ROUNDS)		D.S. CAT. NO. 1005-007961	
19-8-08	26429-SA	DRG. PROV. SEALED.		DATE	AUTHY.
SEALING: PROV. DET. NO. 26429-3A, DT. 19-8-08.		BRIEF RECORD		ZONE	I/C; D.O.
		SIGN.		G.O.	