DIMENSIONS ARE IN mm.
UNTOLERATED DIMNS. AS PER IS : 2102 (MED)
SHARP CORNERS SHOULD BE BLUNT TO R 0.5

PROVISIONAL

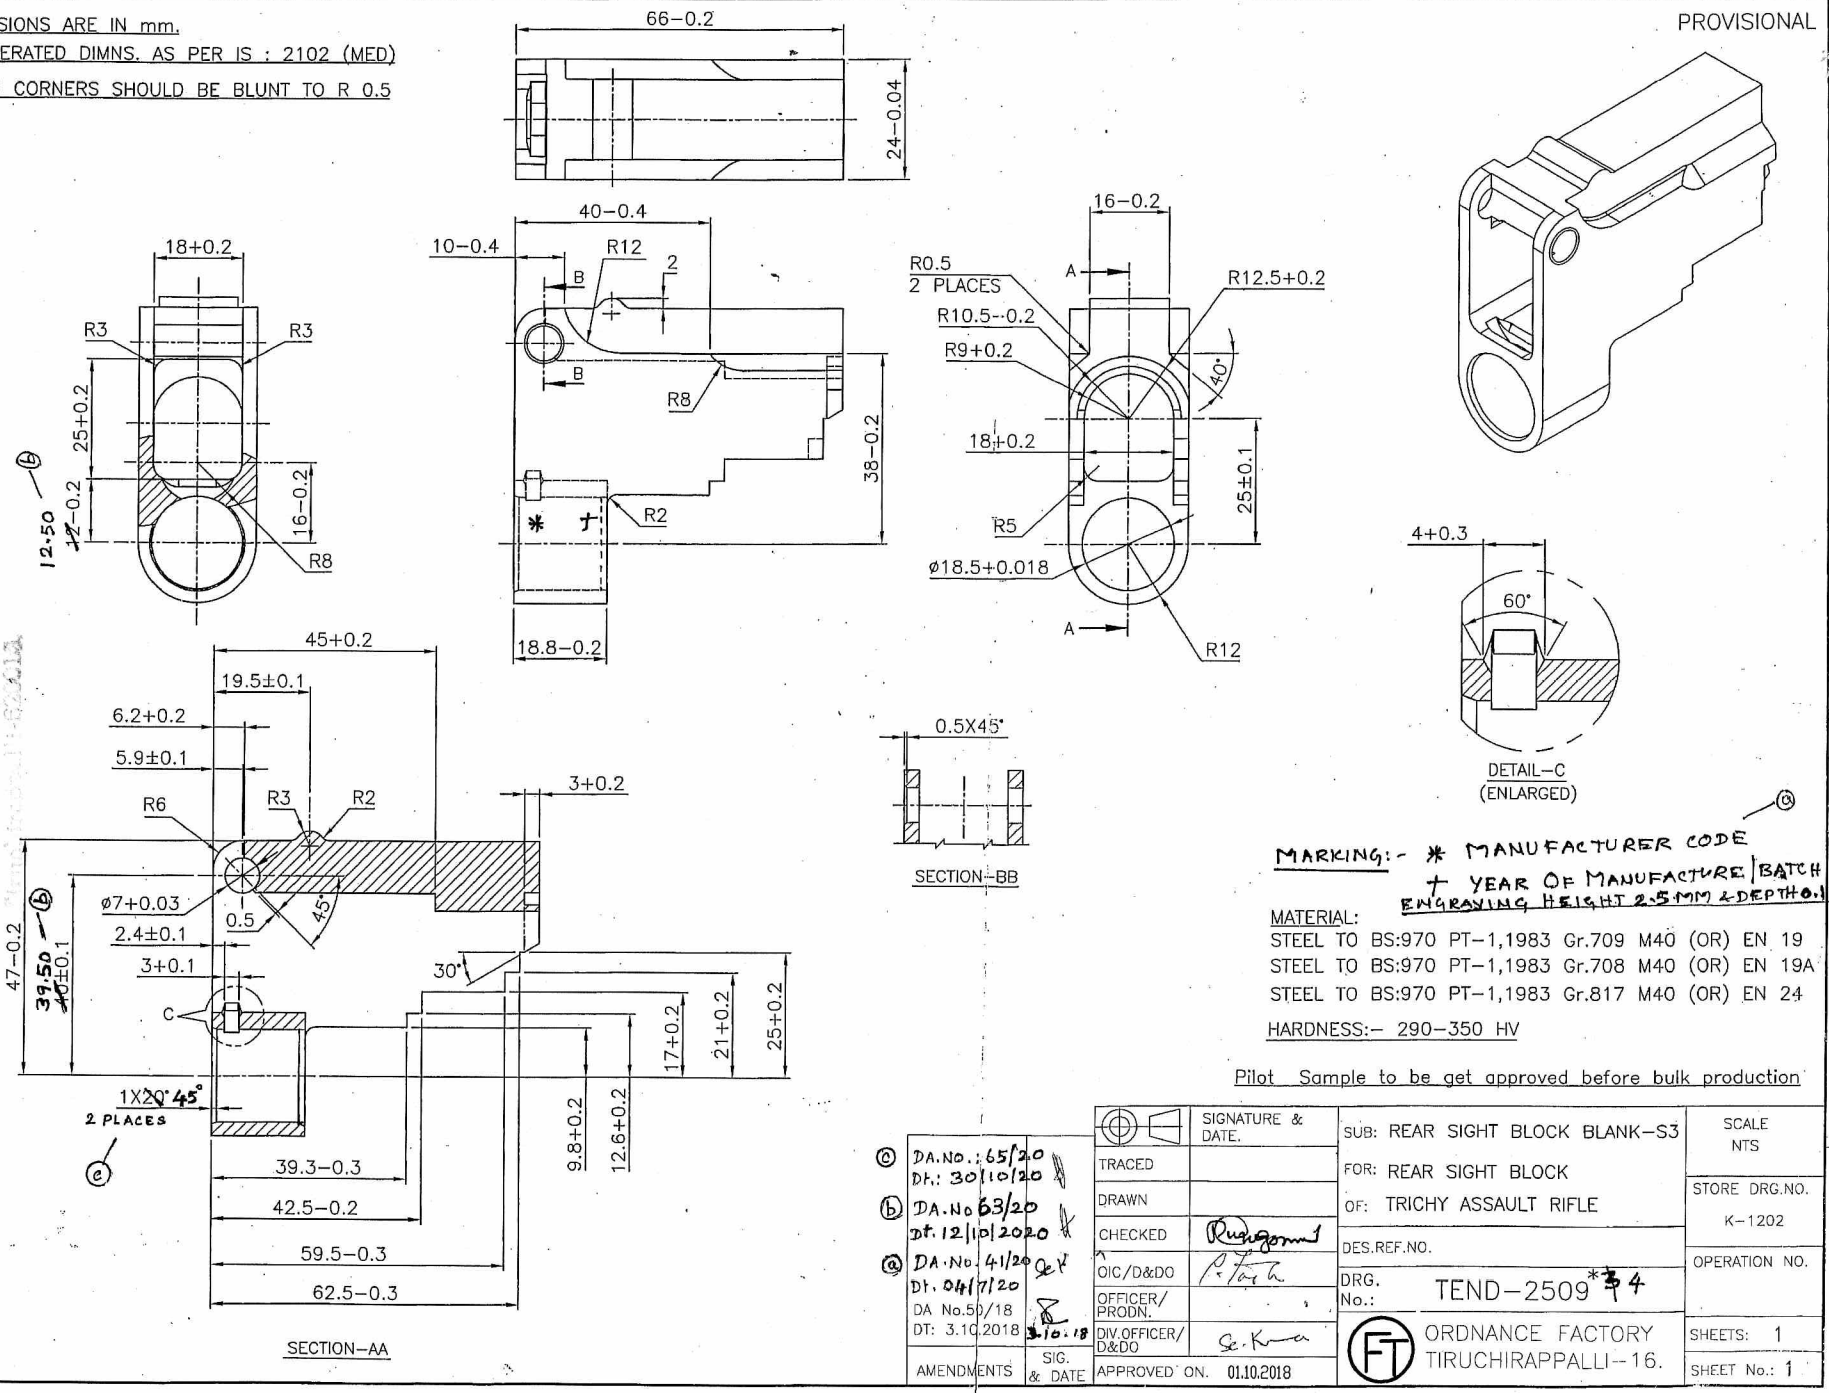

MARKING:- * MANUFACTURER CODE
+ YEAR OF MANUFACTURE | BATCH
ENGRAVING HEIGHT 2.5 MM & DEPTH 0.1 MM.

MATERIAL:
STEEL TO BS:970 PT−1,1983 Gr.709 M40 (OR) EN 19
STEEL TO BS:970 PT−1,1983 Gr.708 M40 (OR) EN 19A
STEEL TO BS:970 PT−1,1983 Gr.817 M40 (OR) EN 24

HARDNESS:− 290−350 HV

Pilot Sample to be get approved before bulk production

AMENDMENTS	SIG. & DATE
ⓒ DA.No.: 65/20 Dt.: 30/10/20	
ⓑ DA.No 63/20 Dt. 12/10/2020	
ⓐ DA.No. 41/20 Dt. 04/7/20	
DA No.50/18 DT: 3.10.2018	3.10.18

	SIGNATURE & DATE.
TRACED	
DRAWN	
CHECKED	
OIC/D&DO	
OFFICER/ PRODN.	
DIV.OFFICER/ D&DO	
APPROVED ON. 01.10.2018	

SUB: REAR SIGHT BLOCK BLANK−S3
FOR: REAR SIGHT BLOCK
OF: TRICHY ASSAULT RIFLE
DES.REF.NO.
DRG. No.: TEND−2509*34

ORDNANCE FACTORY
TIRUCHIRAPPALLI−16.

SCALE NTS
STORE DRG.NO. K−1202
OPERATION NO.
SHEETS: 1
SHEET No.: 1