

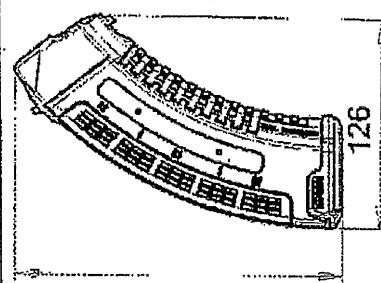


**NOTE :-**

1. Multi-textured jagged-shaped surface for enhanced grip when handling and relocking
2. Disassembled by hand, no tools needed
3. Spring Design:
  - 3.1. Stainless-coated stainless-steel spring of suitable material for ideal corrosion protection and functional in conditions of high and low temperatures and corrosive atmosphere.
  - 3.2. Asymmetric spring profile with changing curve/radius for optimal reliable feed
  - 3.3. Long-lasting spring design for extended duration in loaded storage
  4. Over-travel protection and tilt proof low-friction follower for increased reliability
  5. Durable, lightweight, impact and crush-resistant reinforced all-polymer construction
  6. Allows rapid visual identification of remaining rounds from 10 to 30 via transparent viewing window
  7. Compatible for 7.62x39 AK 47 AKM variants
  8. Includes a Fibroplate accessories rail, with a provision for optional Speed-Pull accessory for easy drawing of the magazine from a pouch
  9. Weight - 200g(max)
  10. 30 Round Polymer Magazine
  11. Working Temp. Range : -40°C to +50°C

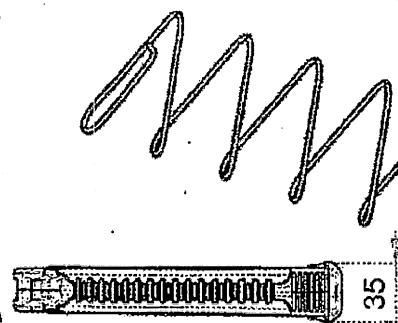

ITEM NO.	PART NUMBER	QTY.	SCALE NTS
7	Jagged Surface	1	
6	Floor Plate Rail	1	
5	Spring	1	
4	Closer	1	
3	Follower	1	
2	Viewing Window	1	
1	Housing	1	

**PROVISIONAL**

SIGNATURE & DATE.	SUB: <b>Polymer Magazine Assy.</b>	FOR: Polymer Magazine	QPG
TRACED		OR: TRICHY ASSAULT RIFLE	1
DRAWN		DES. REF. NO.	
CHECKED		DRG. TAR-K-7050*	Weight(g)
OIC/D&DO		No.:	
OFFICER/ PRODN.		ORDNANCE FACTORY	
DIV.OFFICER/ D&DO		TIRUCHIRAPPALLI-16.	
AMENDMENTS & DATE	DA No 6/720 Dt. 04/11/2020 Rate 11(After ZONE 4 A) * APPROVED ON 17/02/2020	SIG. APPROVED ON 17/02/2020	Sheets: 1 Sheet No.: 1

A	B	C	D
1	2	3	4