


MCT-3258/1

SEC A-A
SCALE-10:1

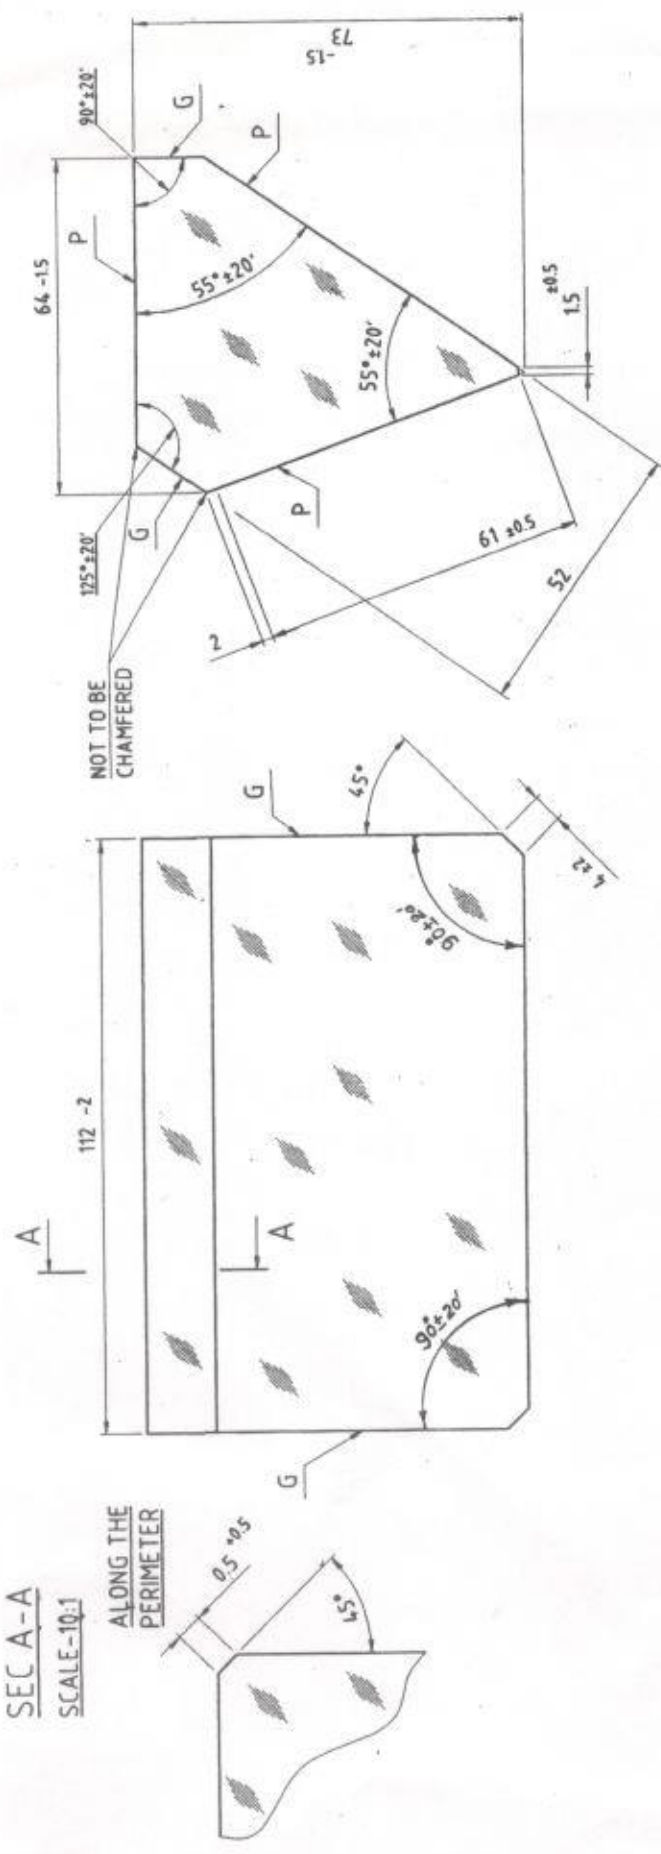

- NOTE :-
1. ALL SHARP CORNERS & EDGES TO BE CHAMFERED 1.0 mm AT 45° EXCEPT OTHERWISE STATED.
 2. ALL SURFACES TO BE FLAT FACES MARKED 'G' SHOULD BE GRINDED.
 3. FACES MARKED 'P' TO BE POLISHED & FLAT WITH IN 3 FRINGES UNLESS OTHERWISE STATED.
 4. SURFACE QUALITY 60-40 (CENTRE ZONE), 80-50 (OUTER ZONE).
 5. THROUGH ANGLE & OPTICAL PATH NOT MORE THAN ±5'
 6. PYRAMIDAL ERROR NOT MORE THAN ±3'

MATL.- GLASS K-108, GOST 3514-76
ALTERNATE EQUIVALENT MATL.-
OPTICAL GLASS, BSC-7 (517642) (RADIATION RESISTANT), GRADE-Aa
TO IS: 1400-1960, RE-AFFIRMED 1996, ABSORPTION LESS THAN 1%

FOR TRADE COPY
Date of issue: 24/11-17

ALL DIMENSIONS ARE IN mm.

ORDNANCE FACTORY DEHRADUN	DR:- R.K.SHARMA	DATE:- 11.07.2012	SCALE:- 1:1
	TR:-	MATL. AS ABOVE	TREAT -
	CH:-	SHTS:- 1	SHT. No:- 1
	APPROVED: JN/MBP	AMENDMENTS: OFD/DO/002	DRAWING No.:- MCT-3258/1

PERISCOPE A.V. T.N.P.-165A (T-72)
PRISM
(WITHOUT SILVERING)

DRG. No.- AU 7.200.050