

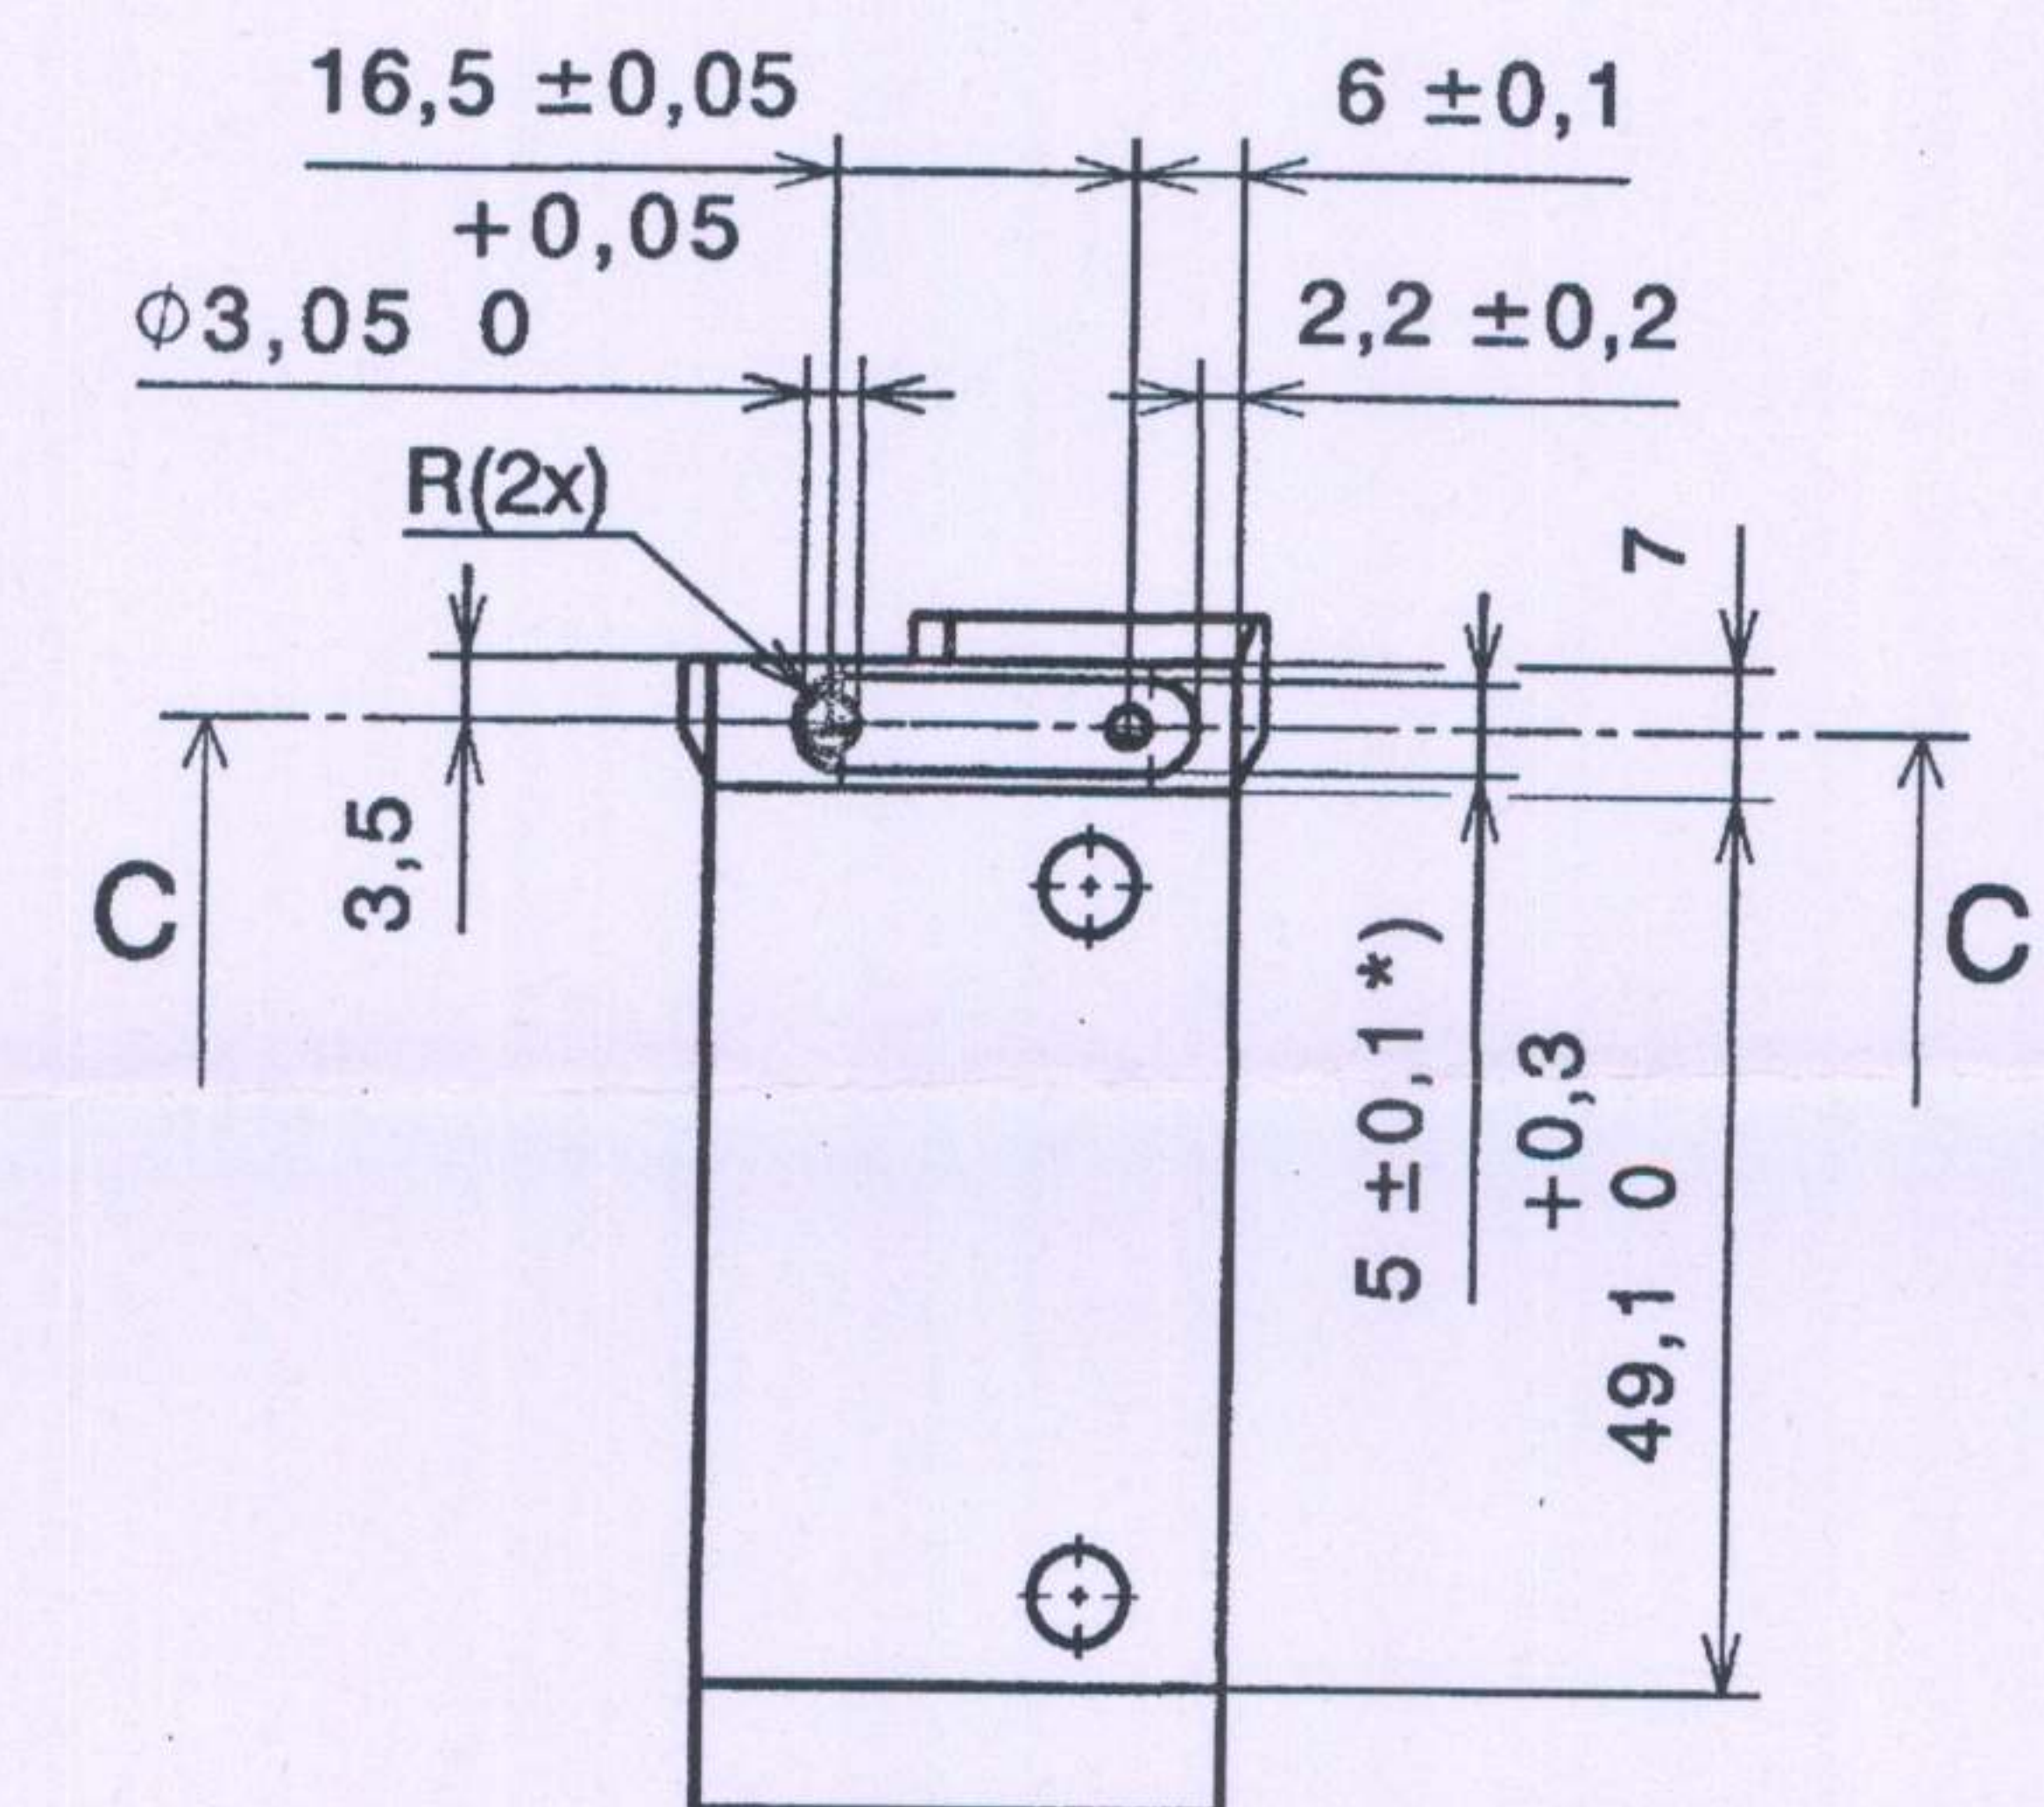
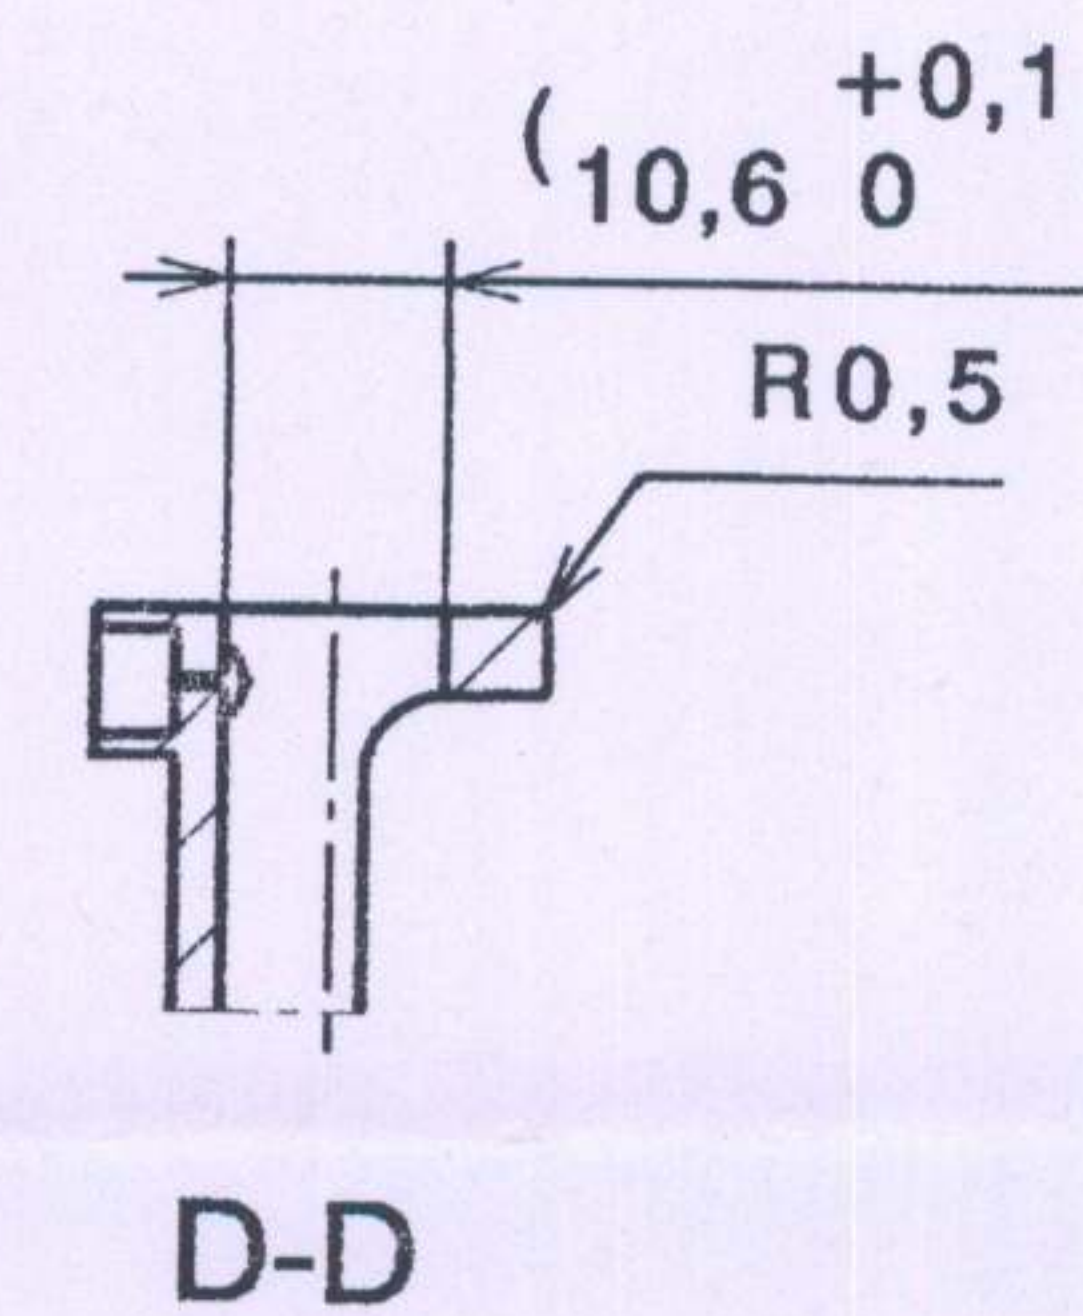
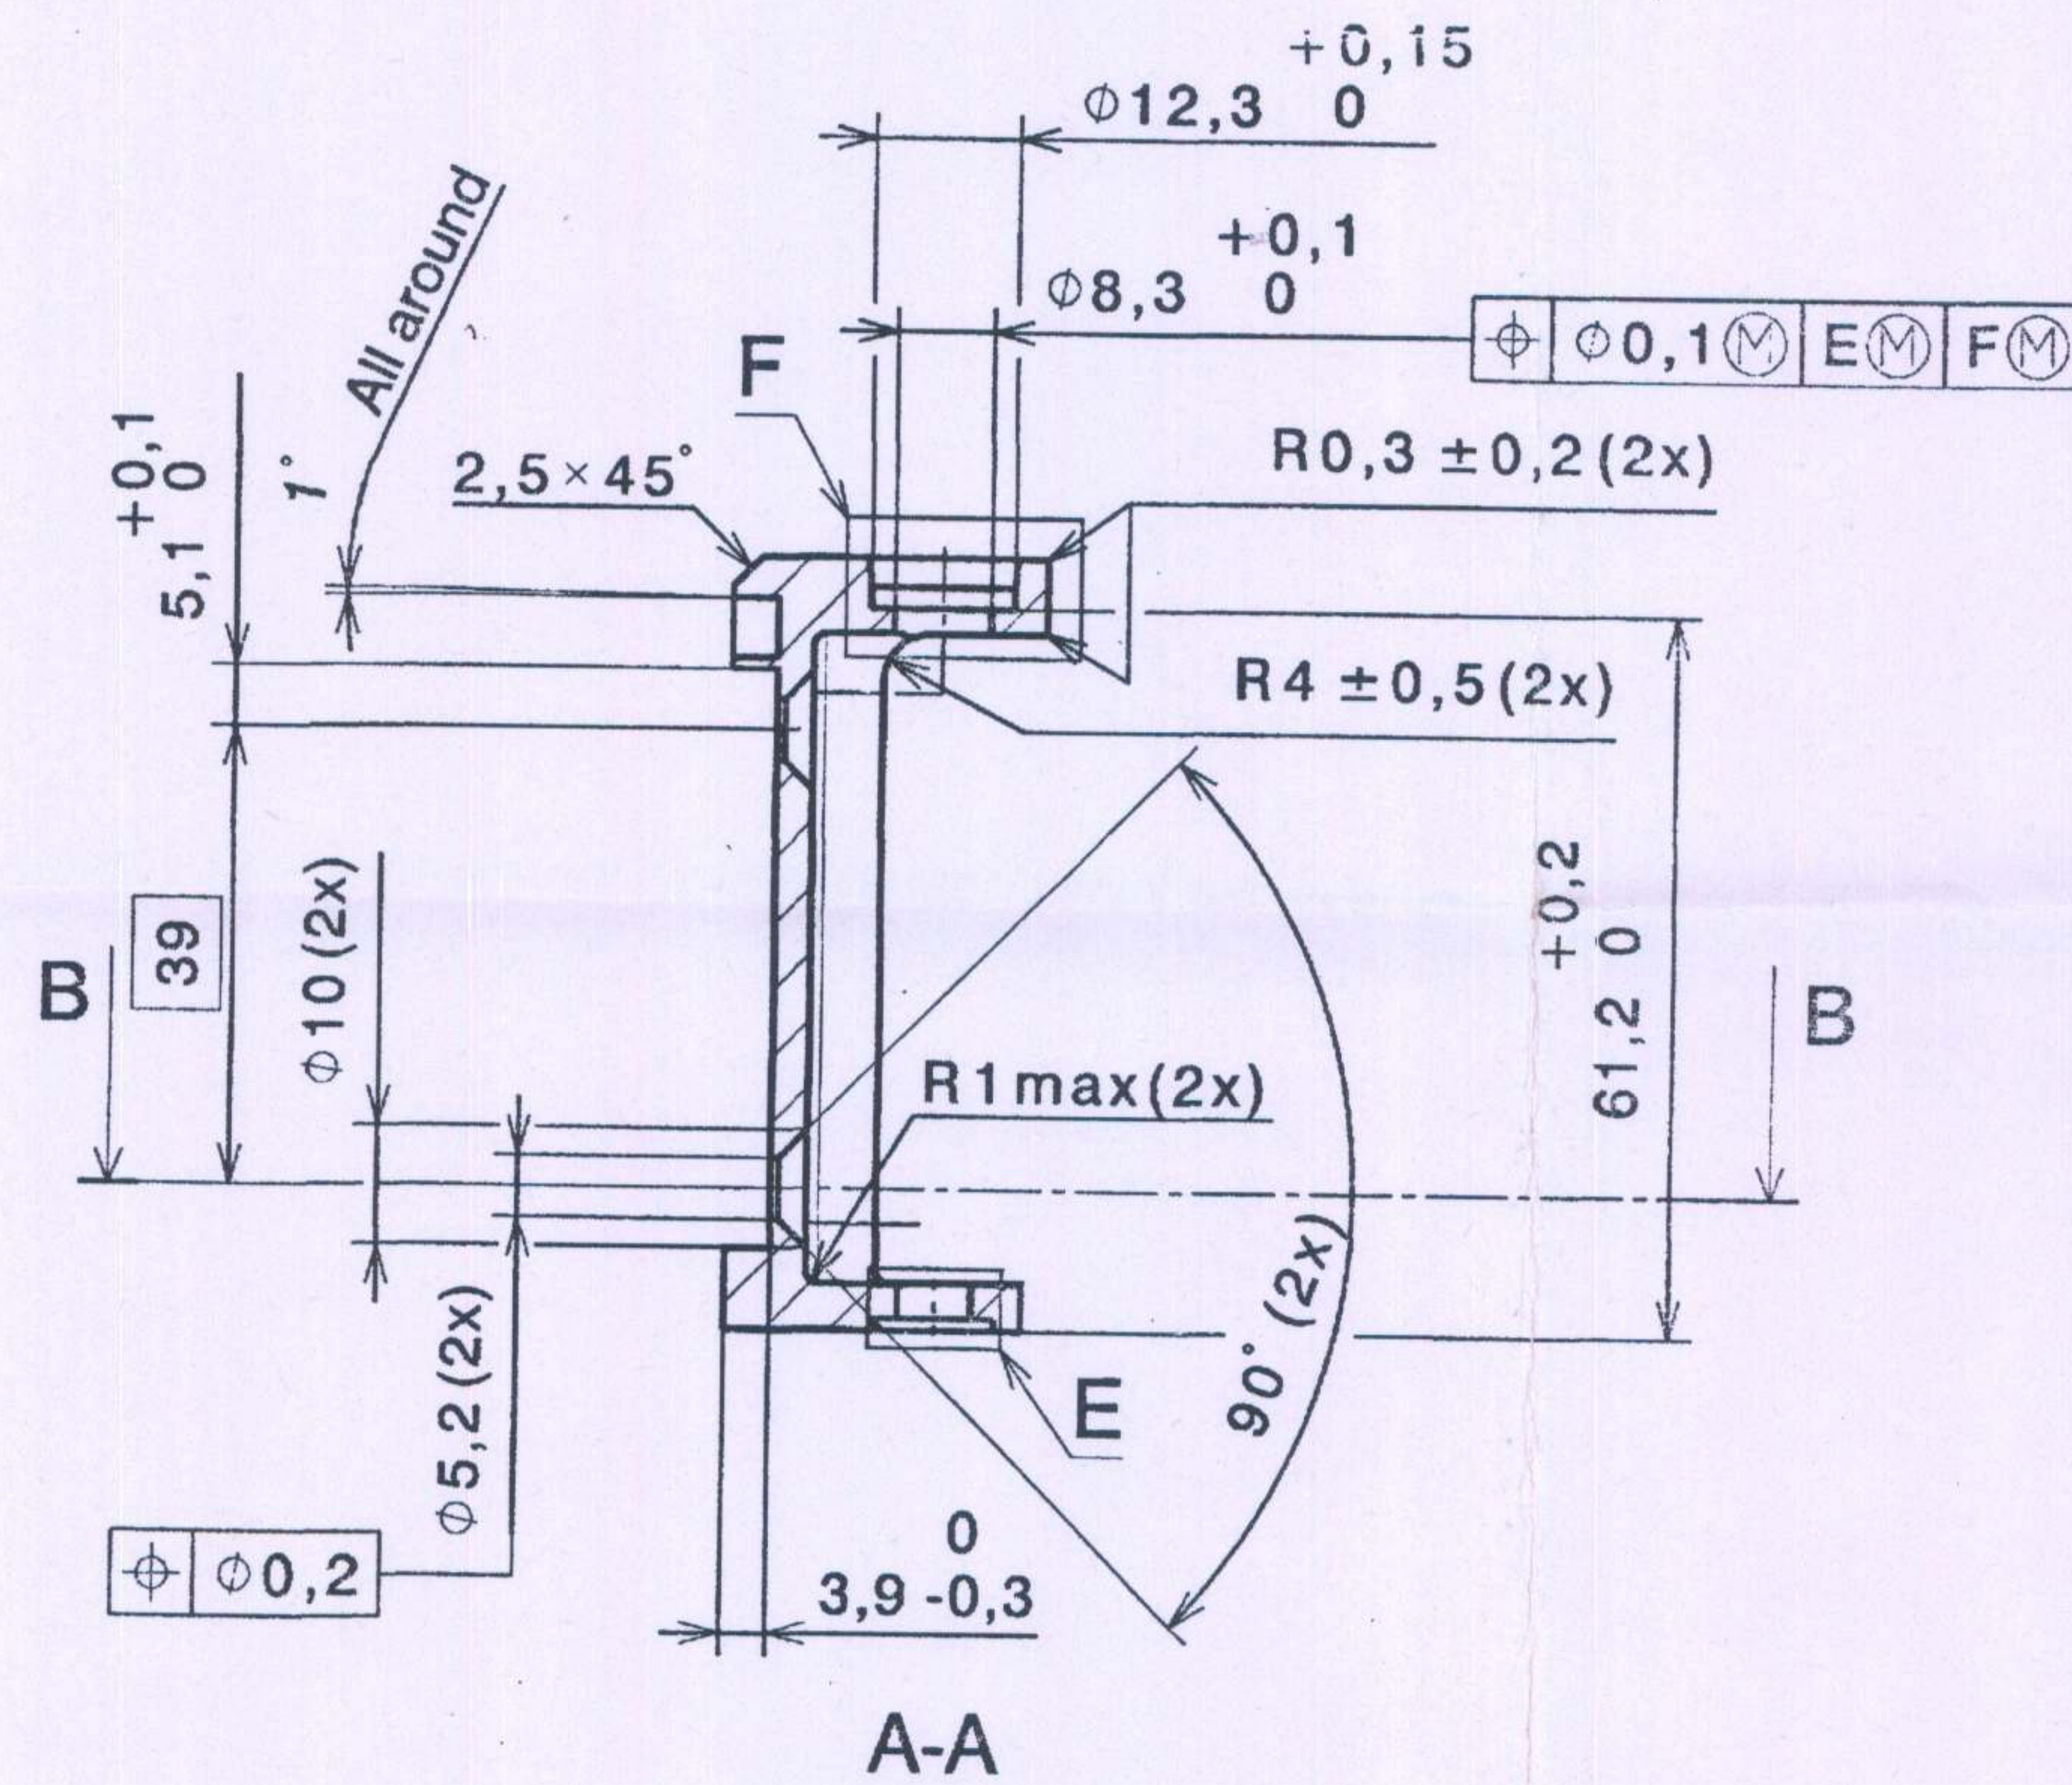
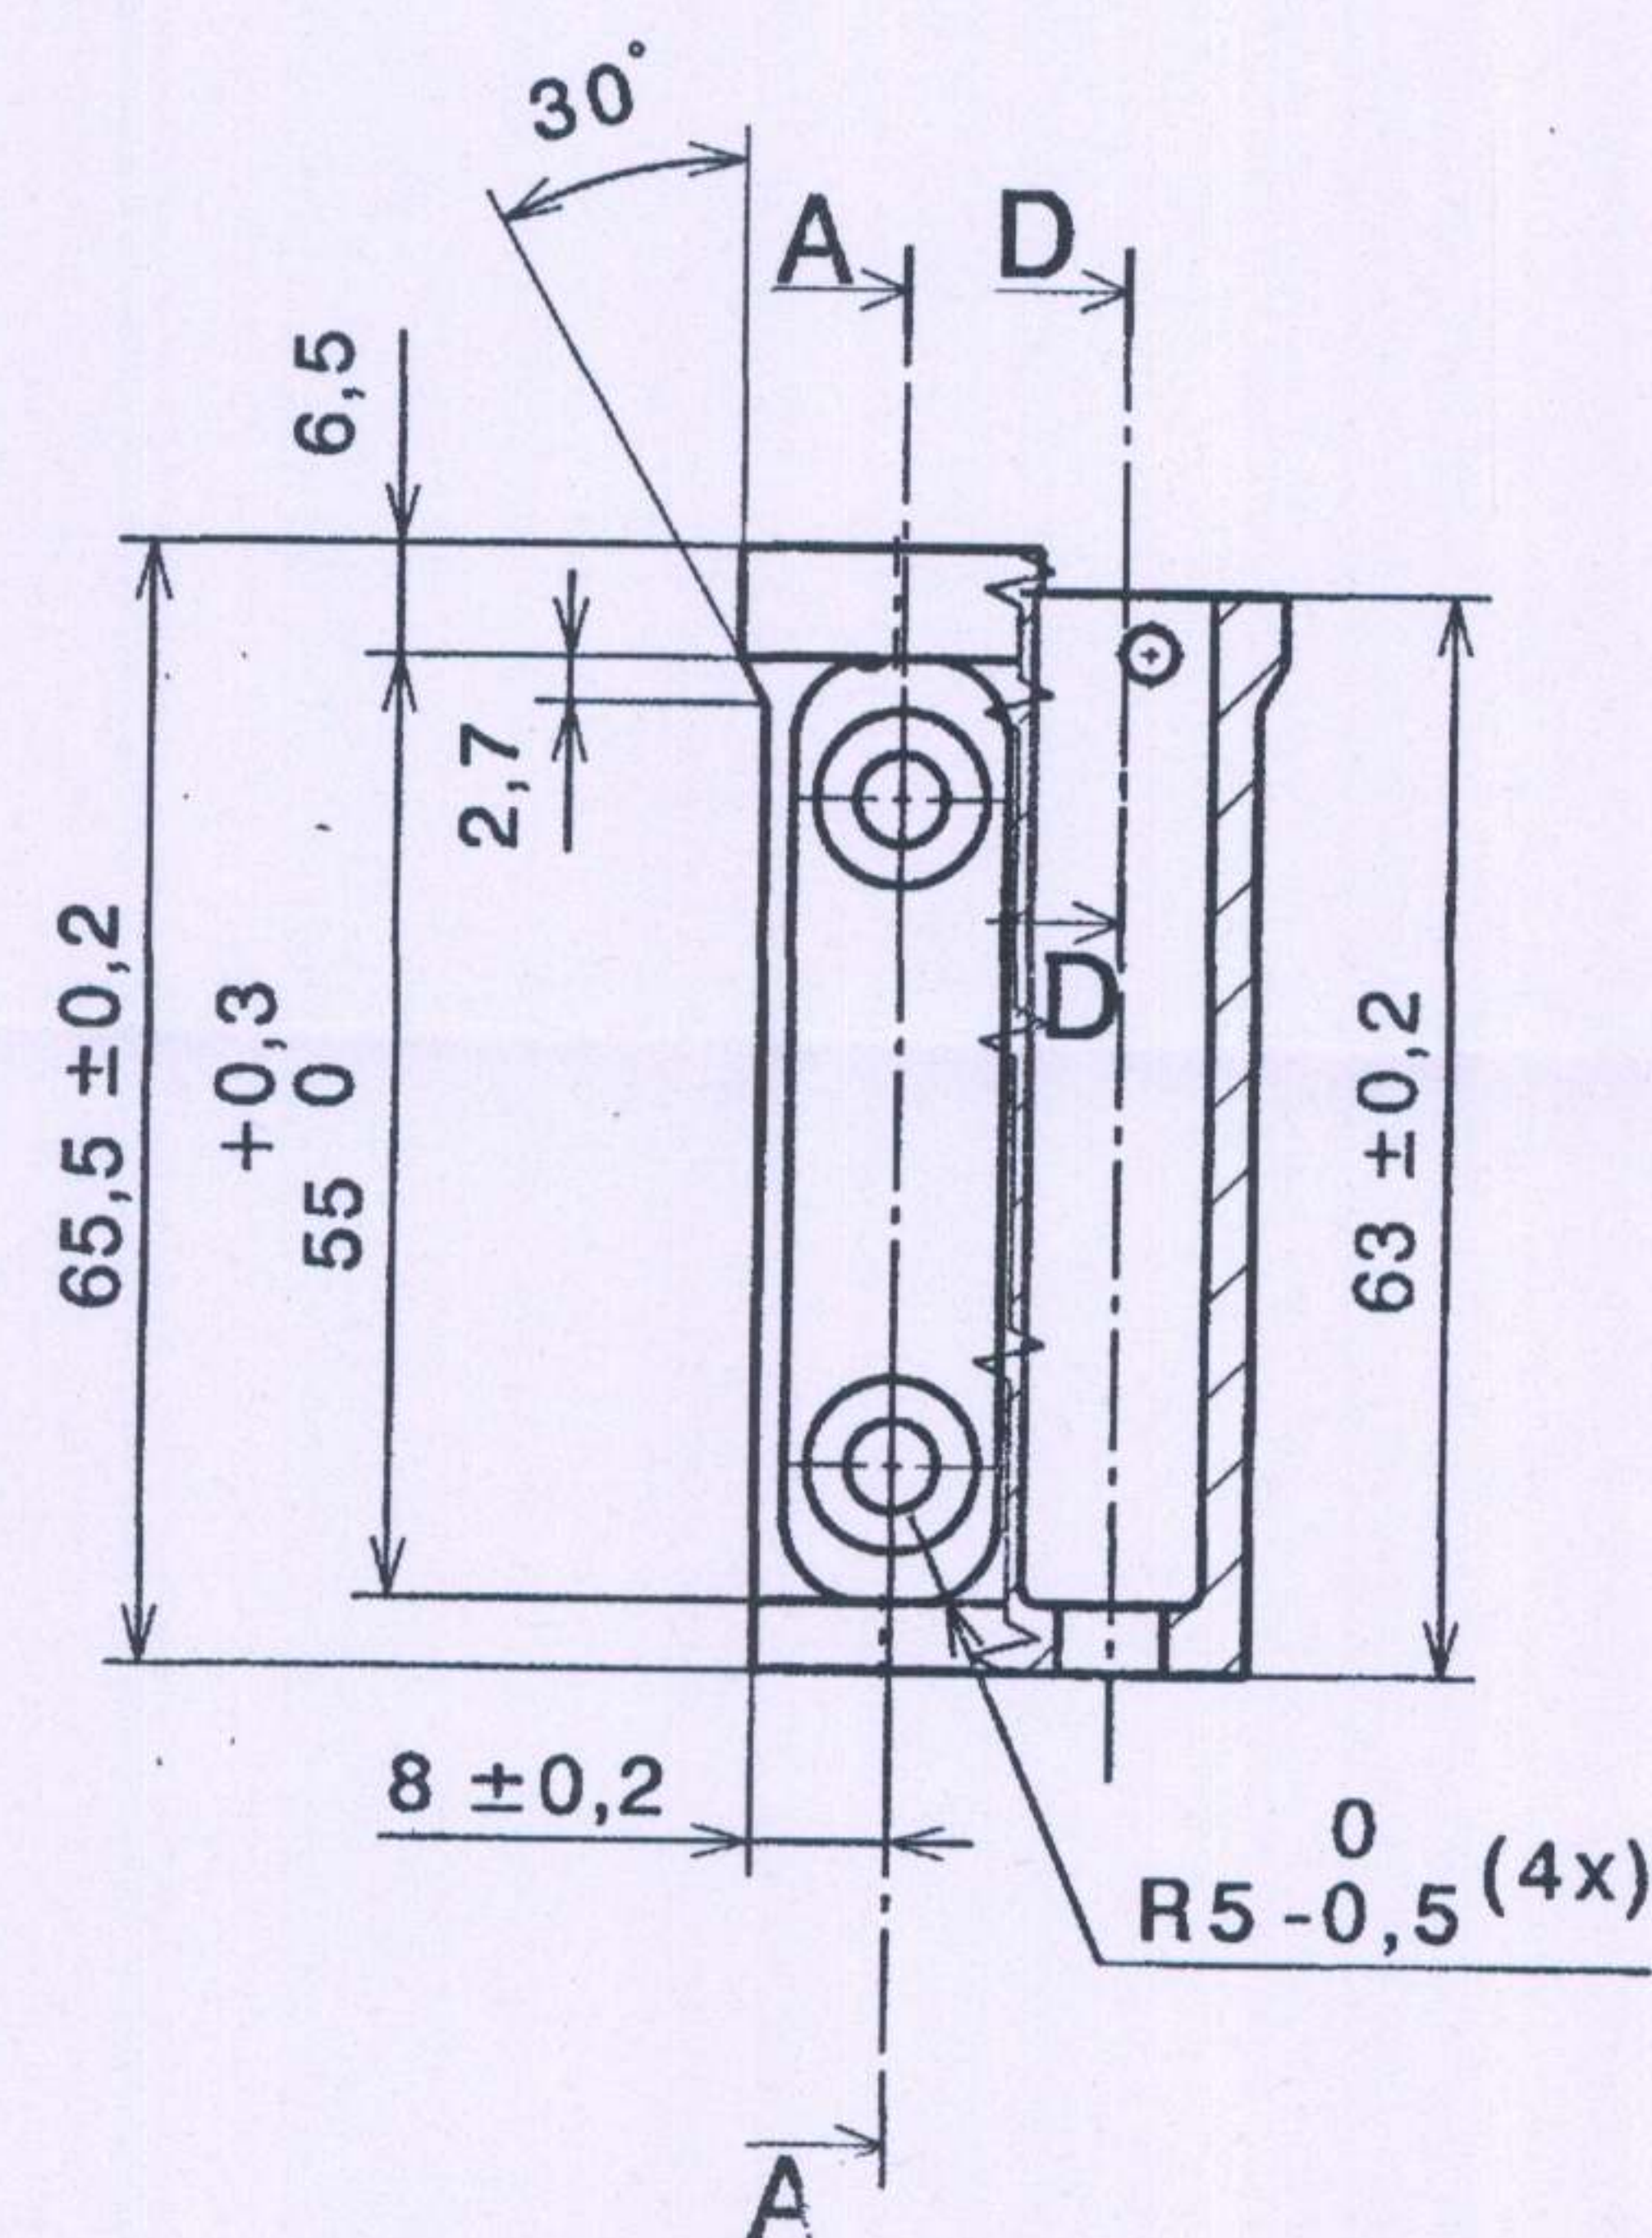
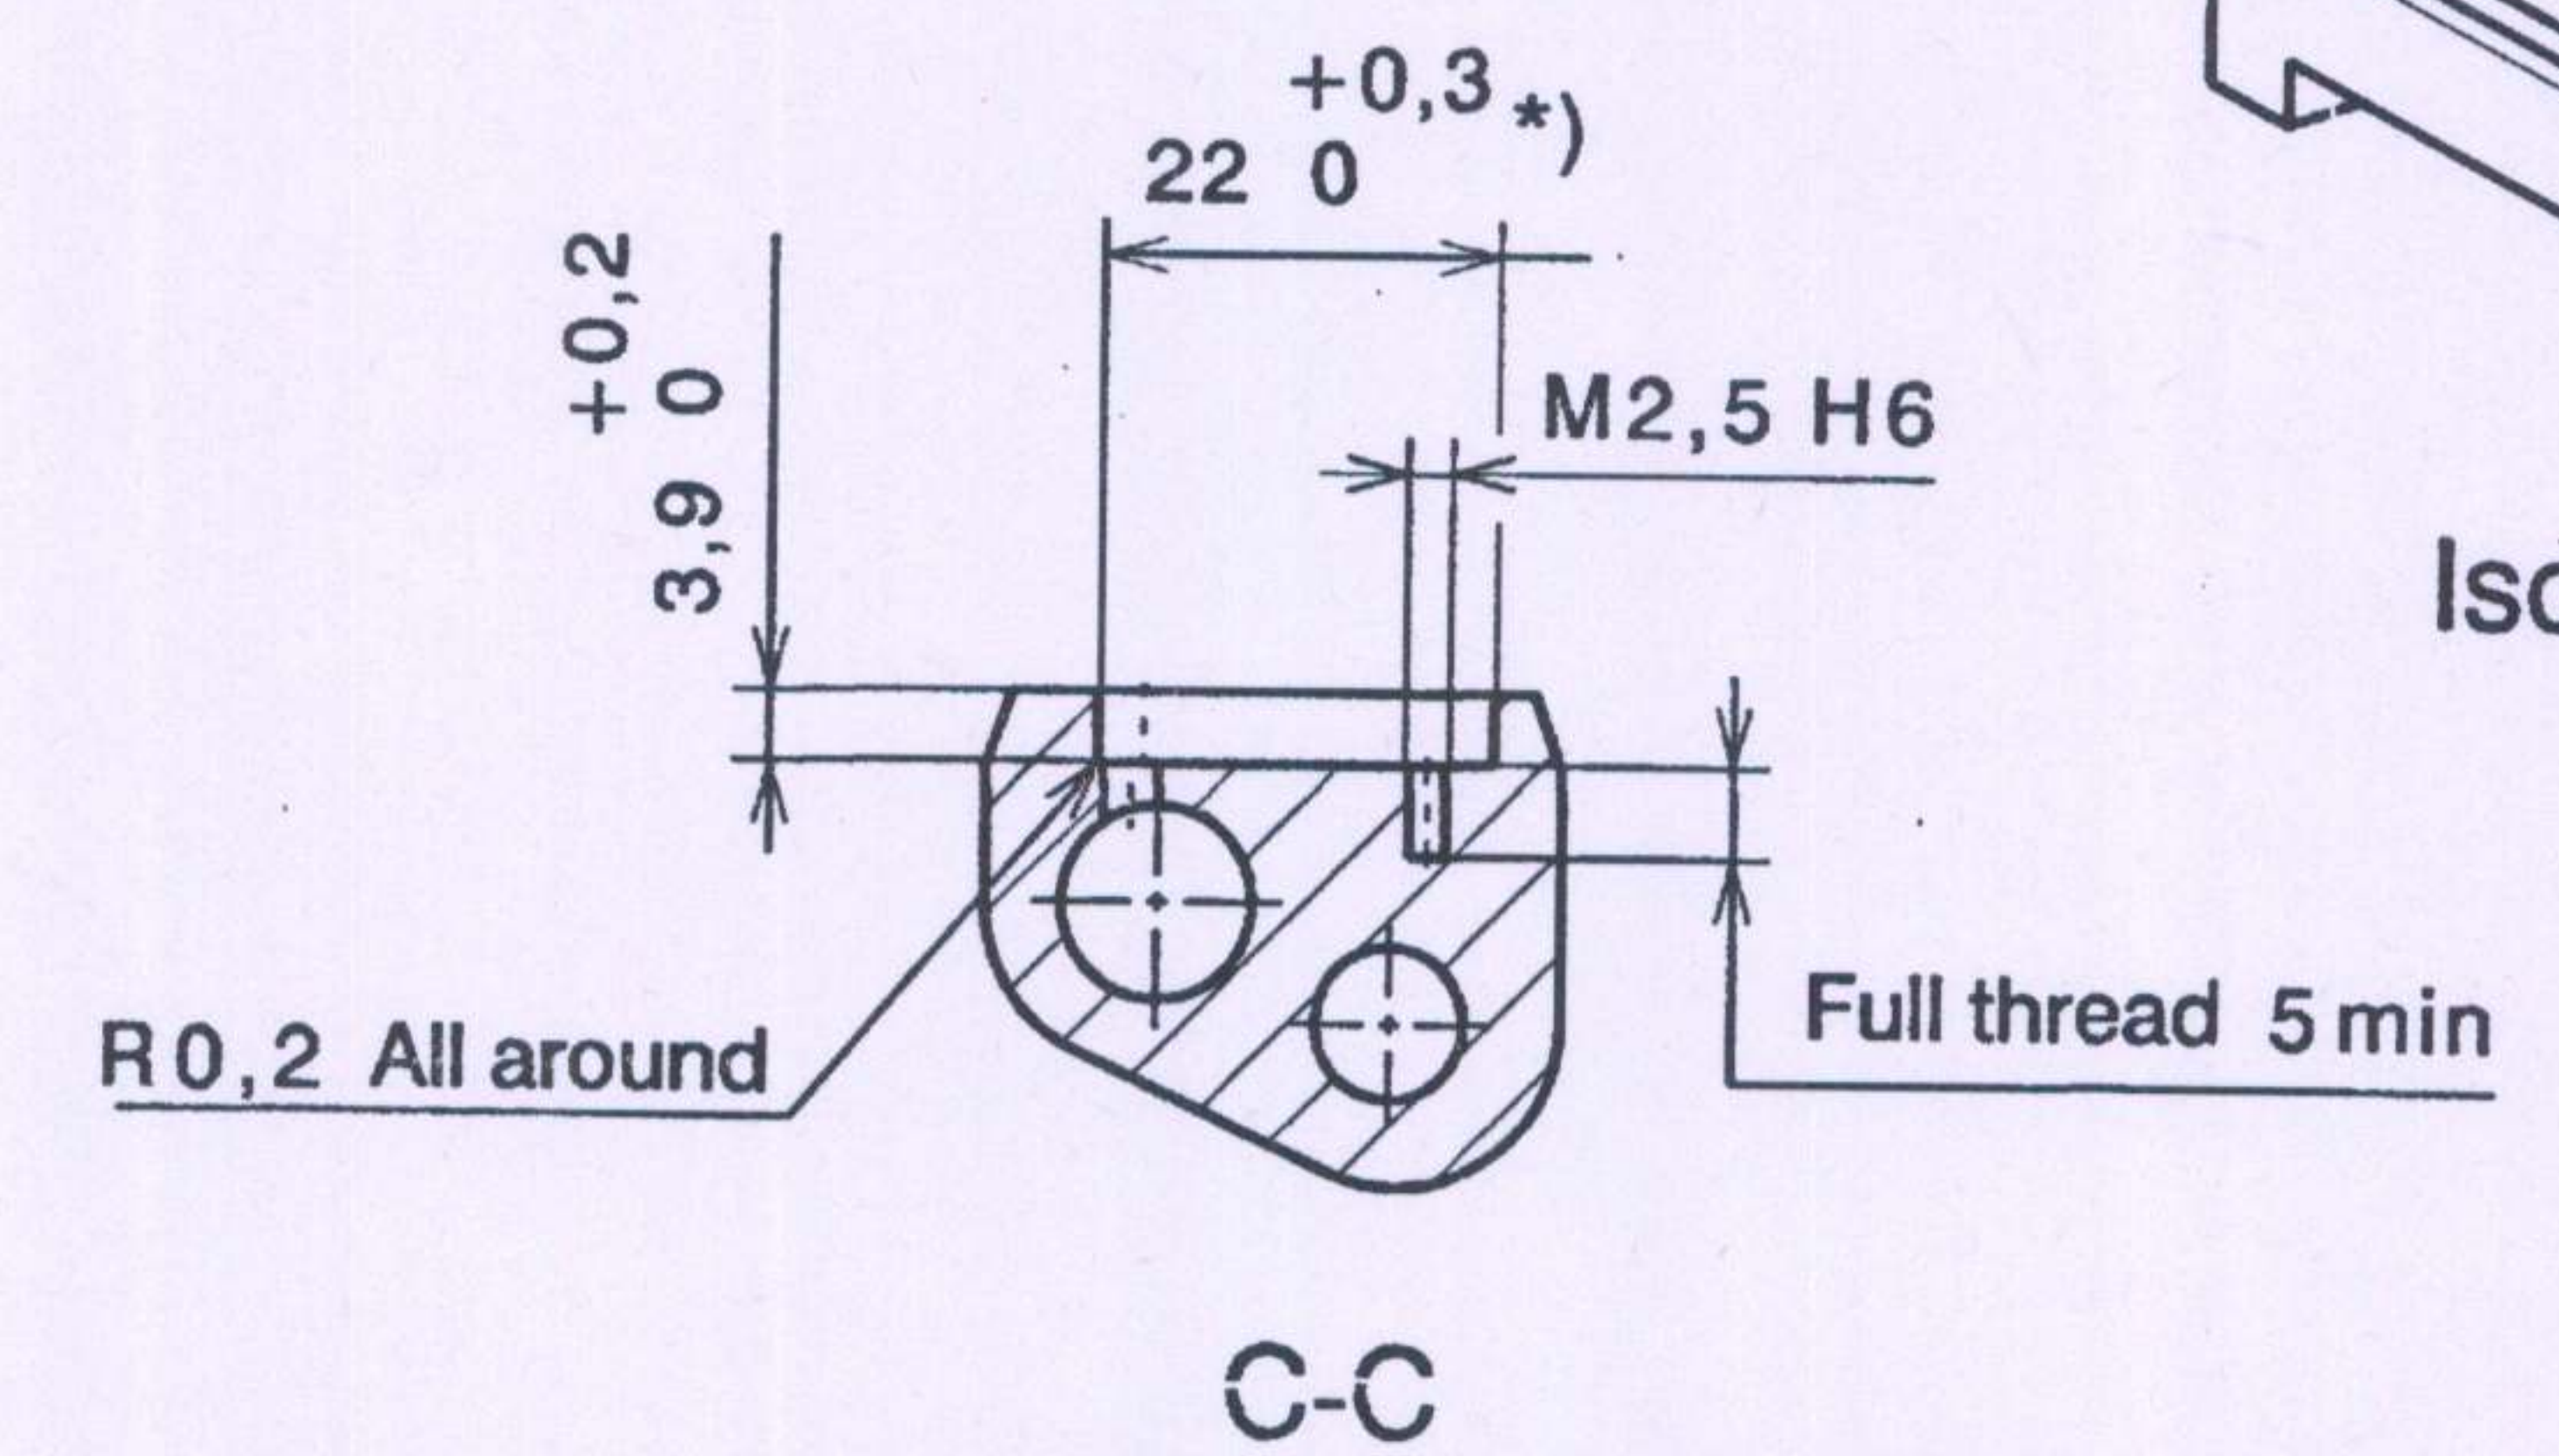
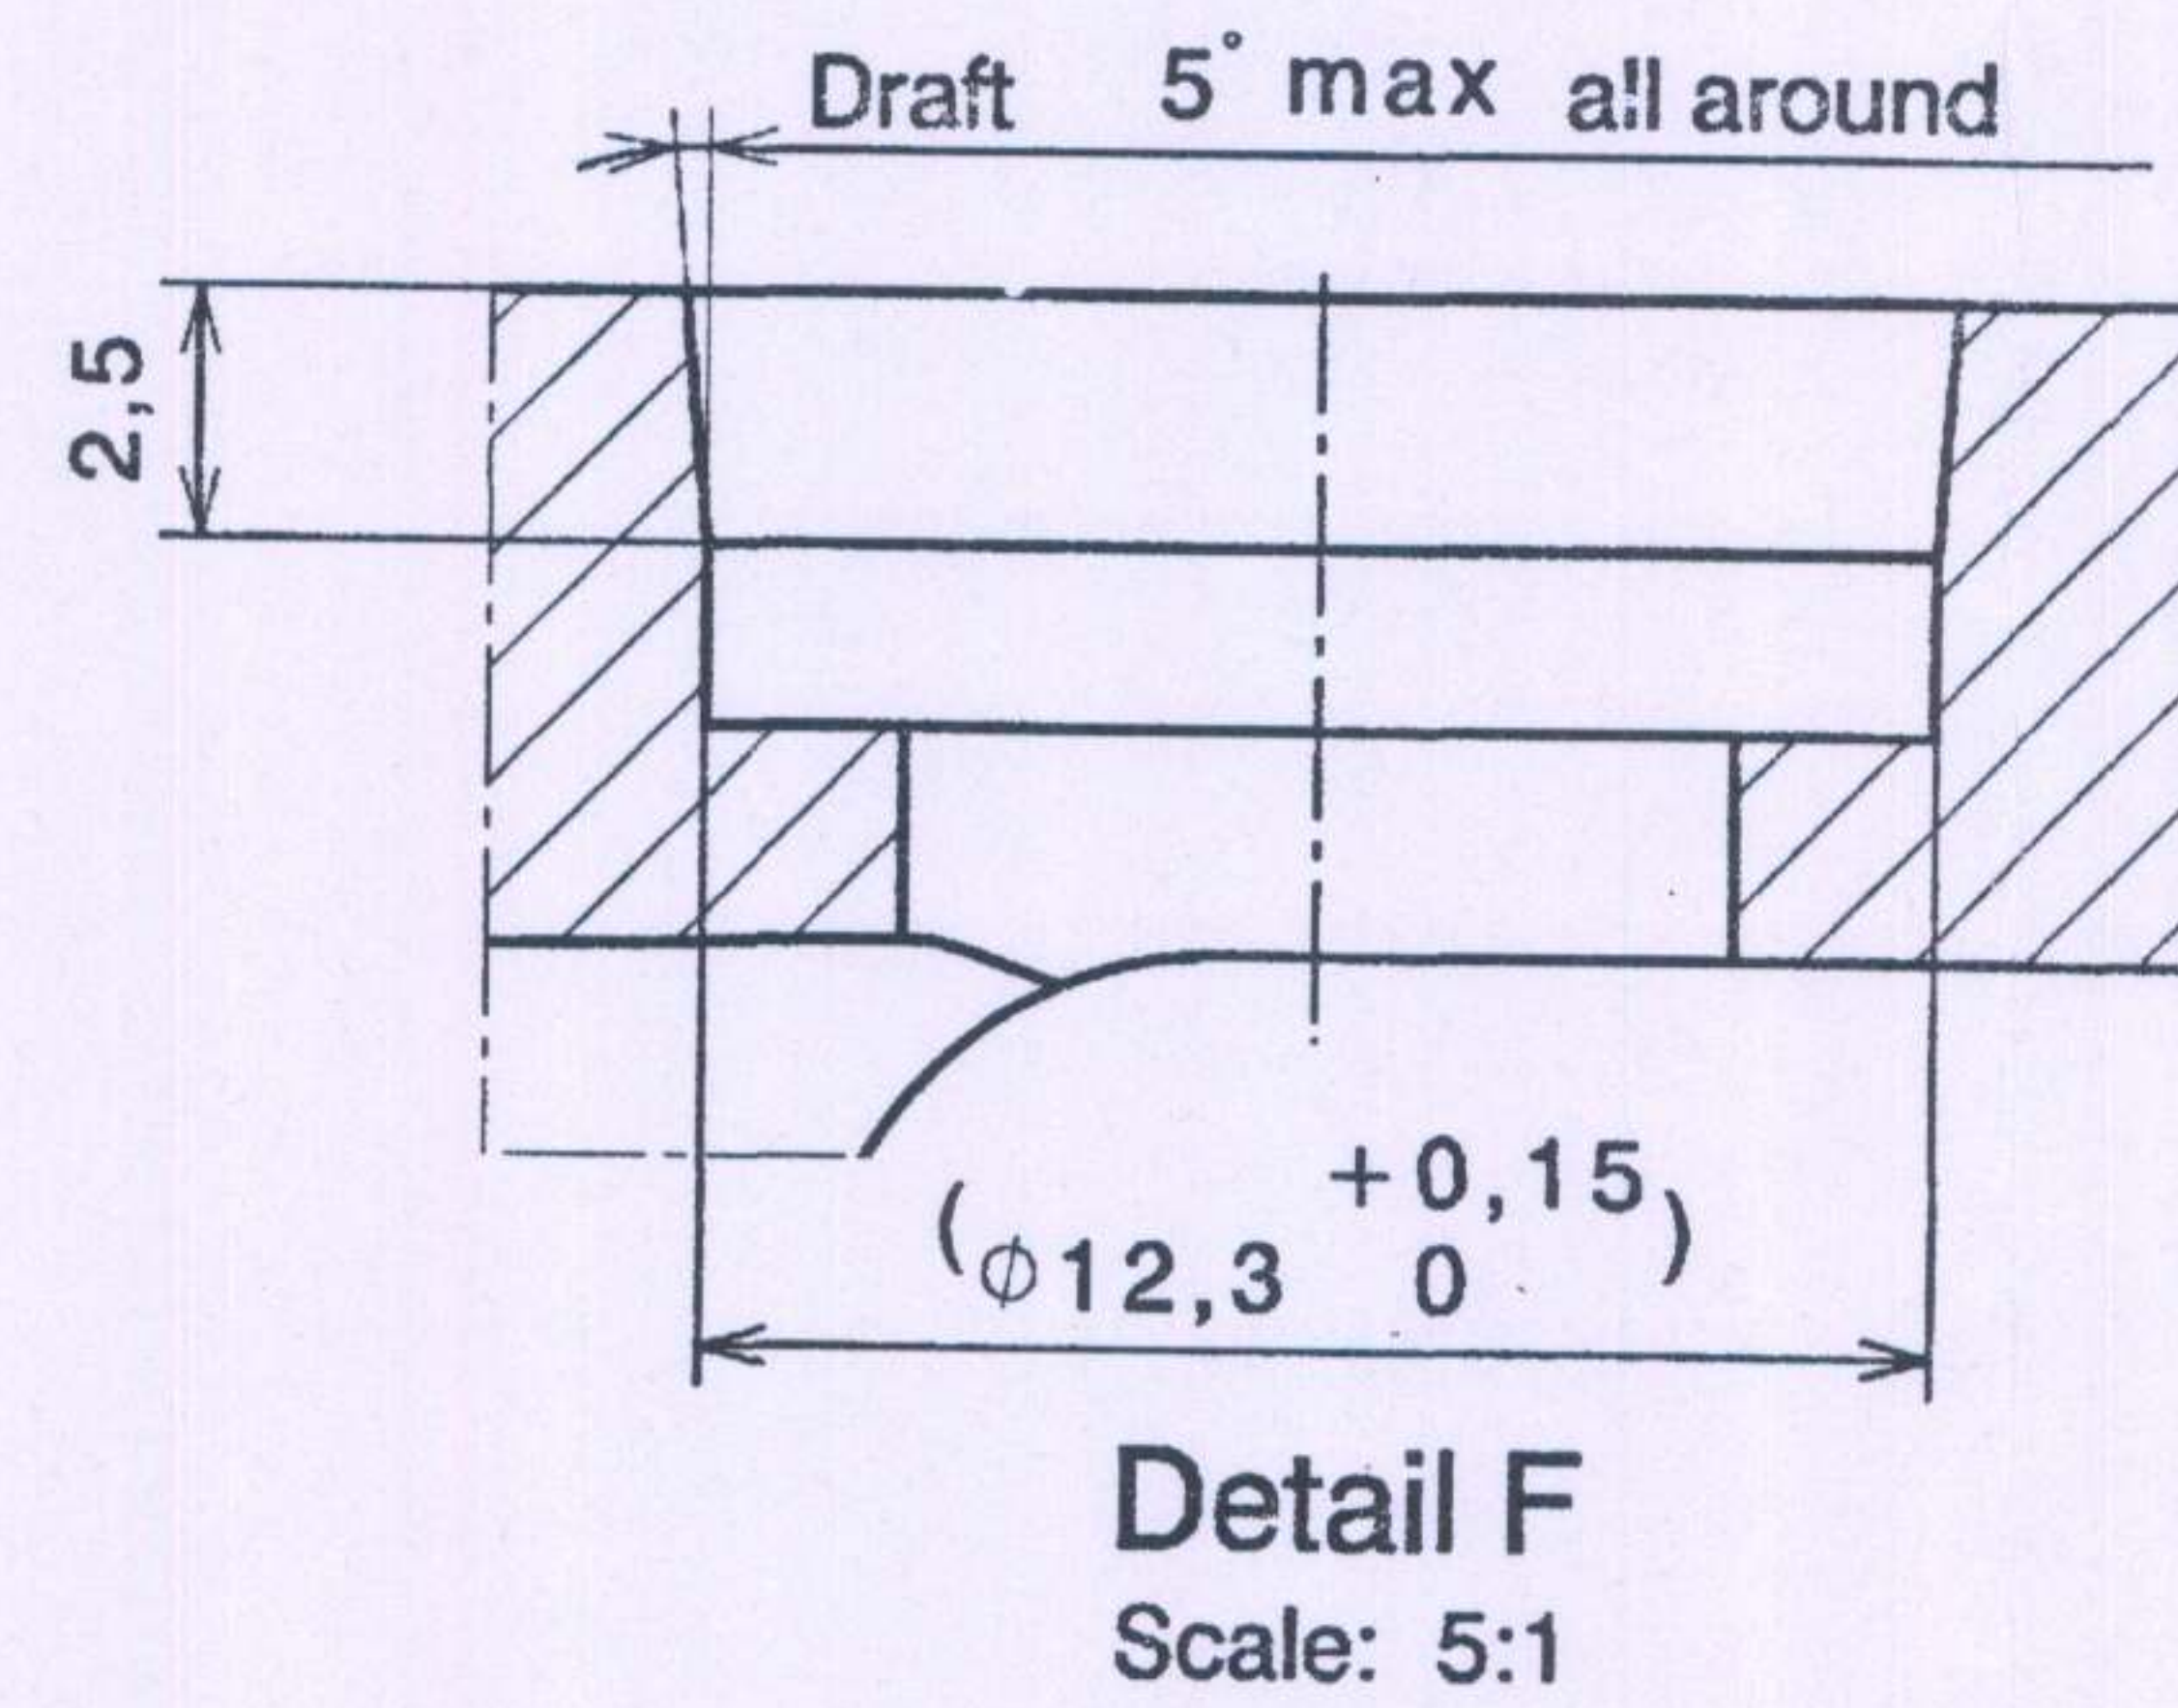
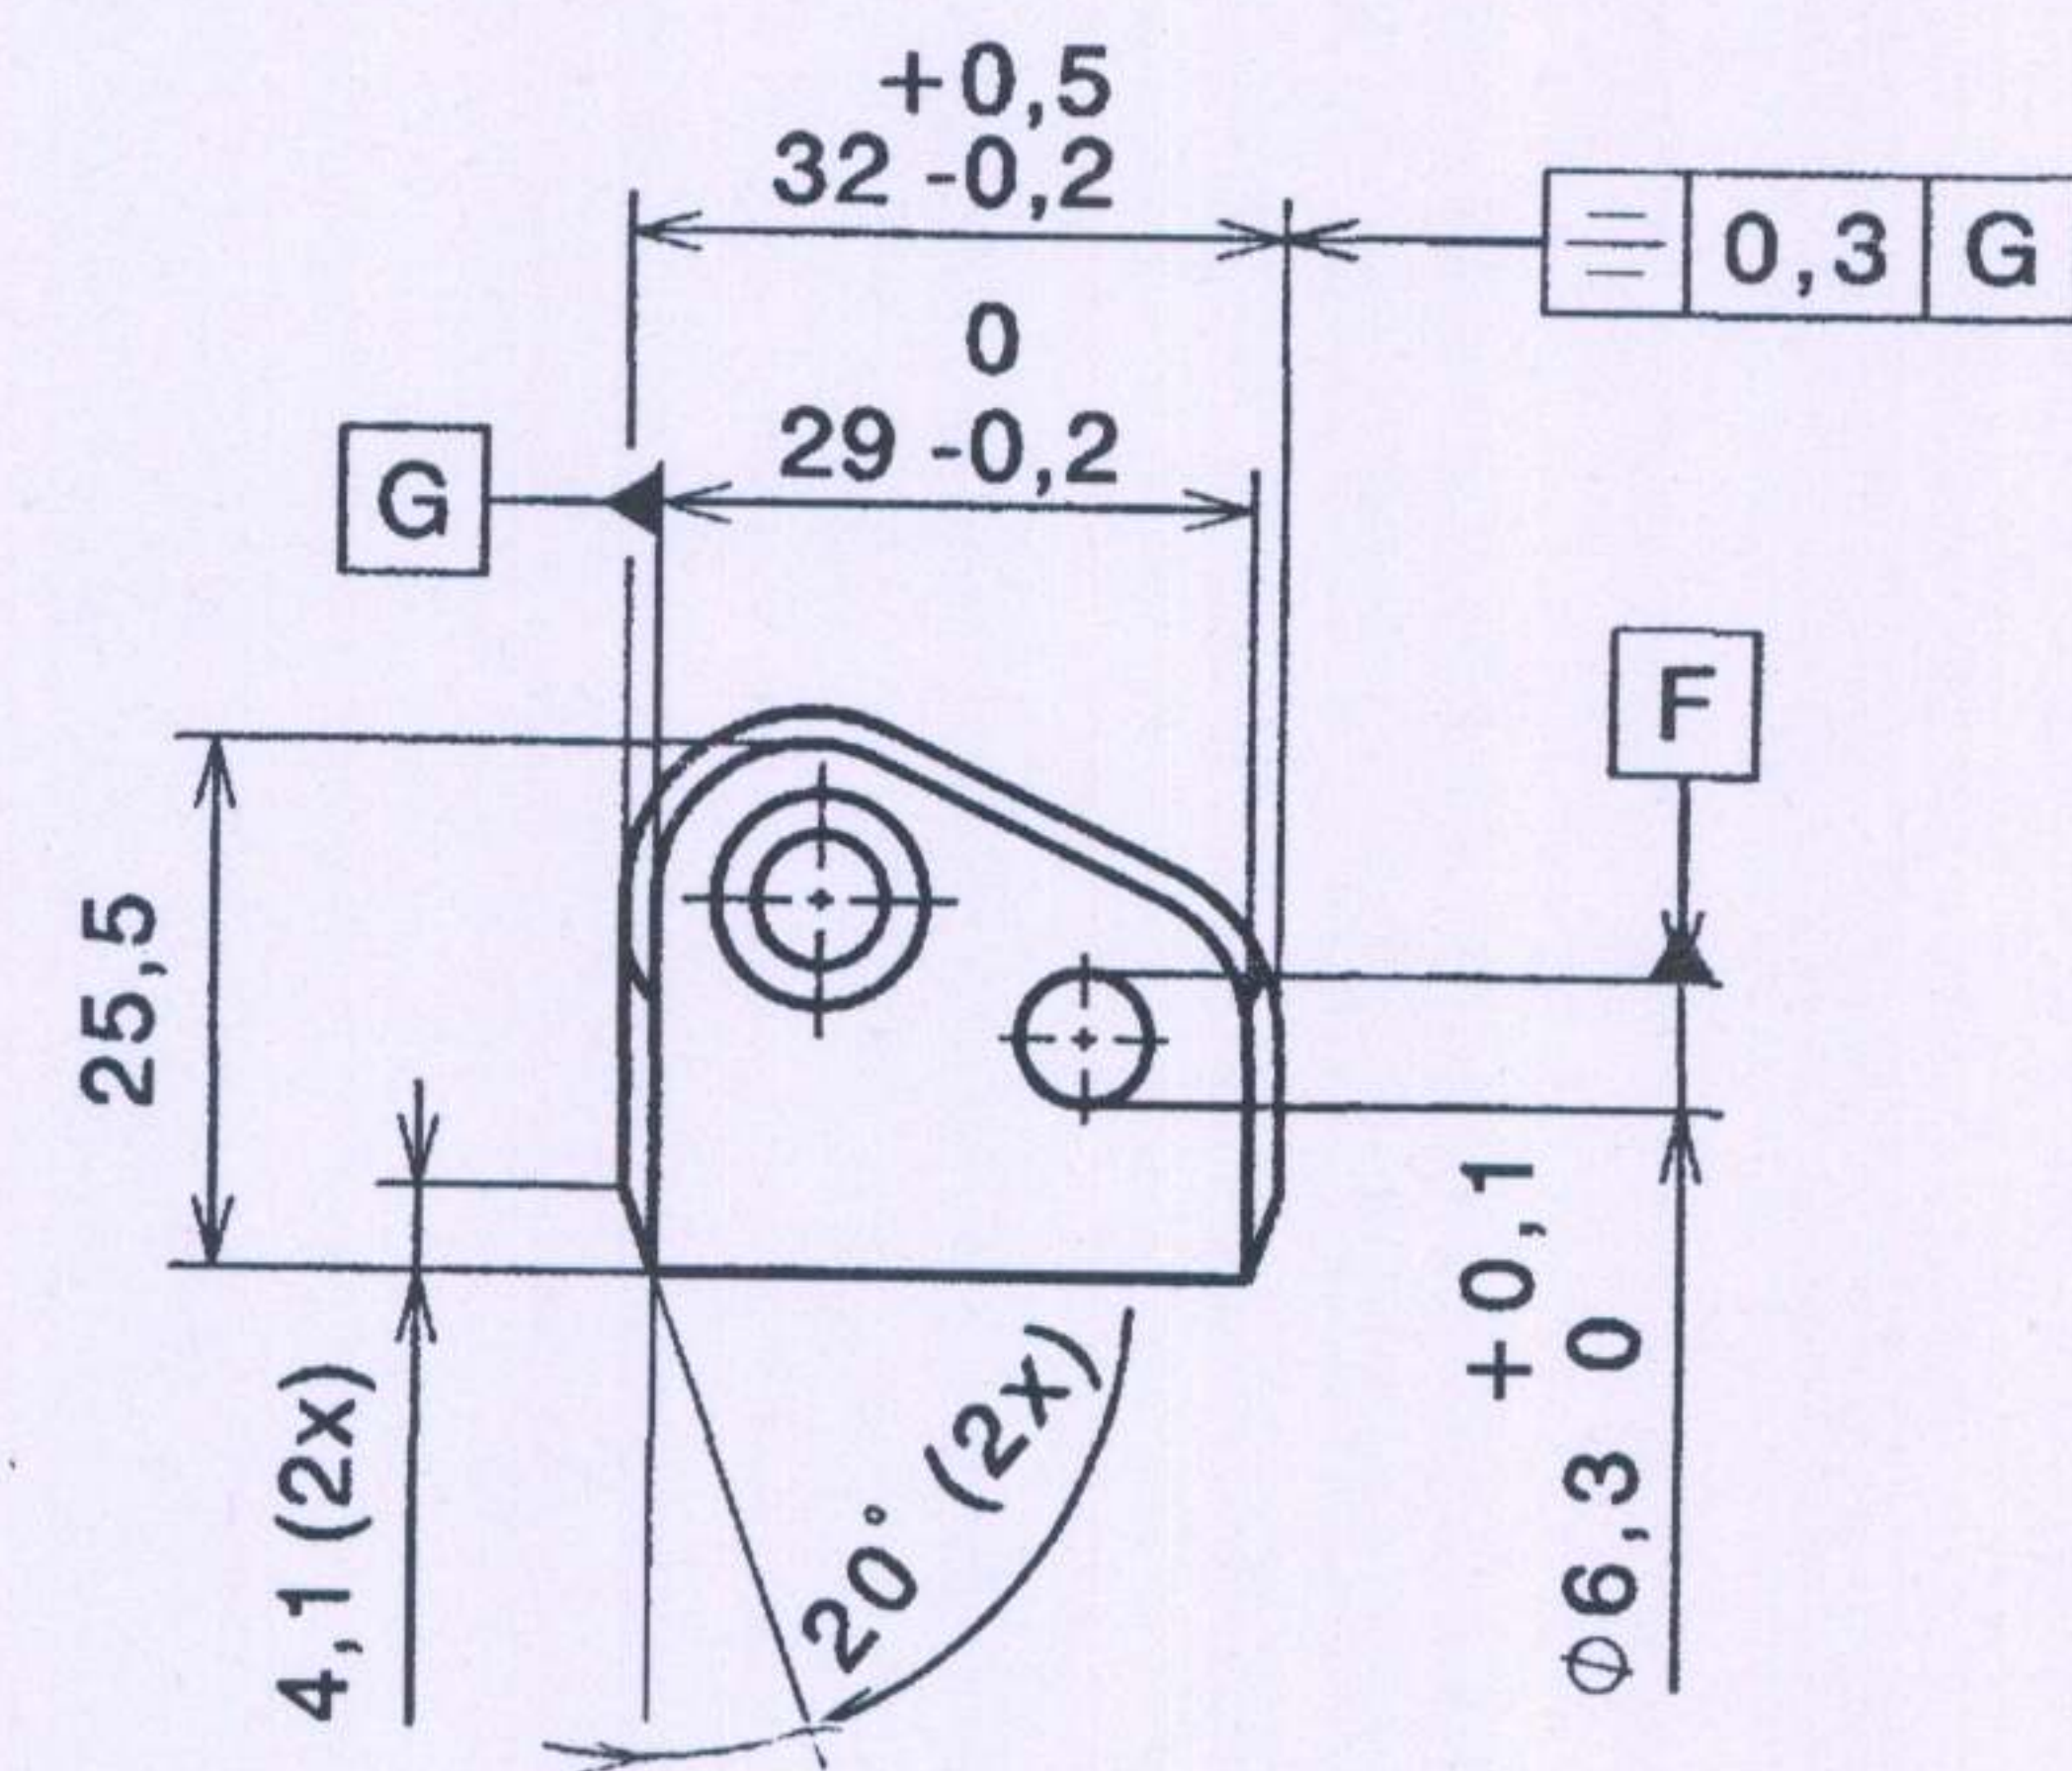
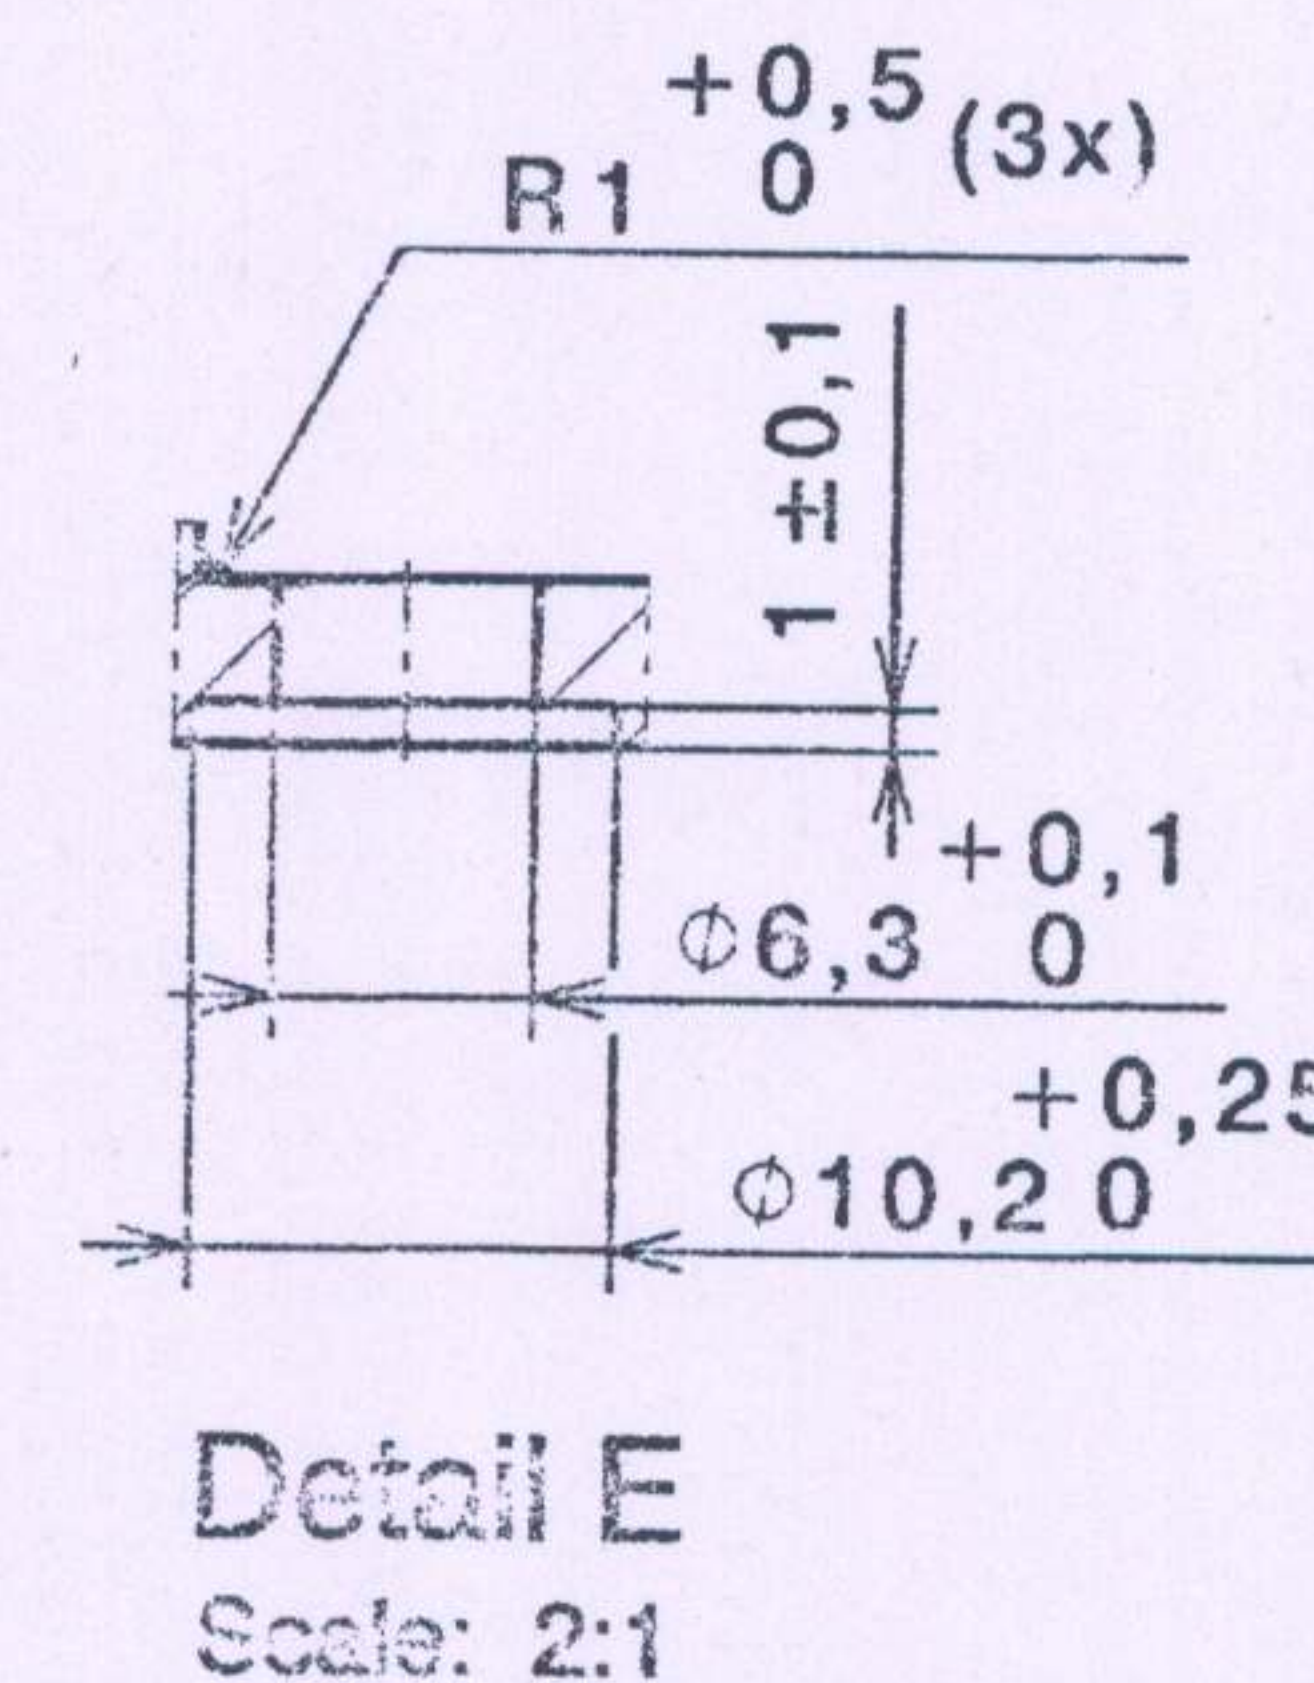


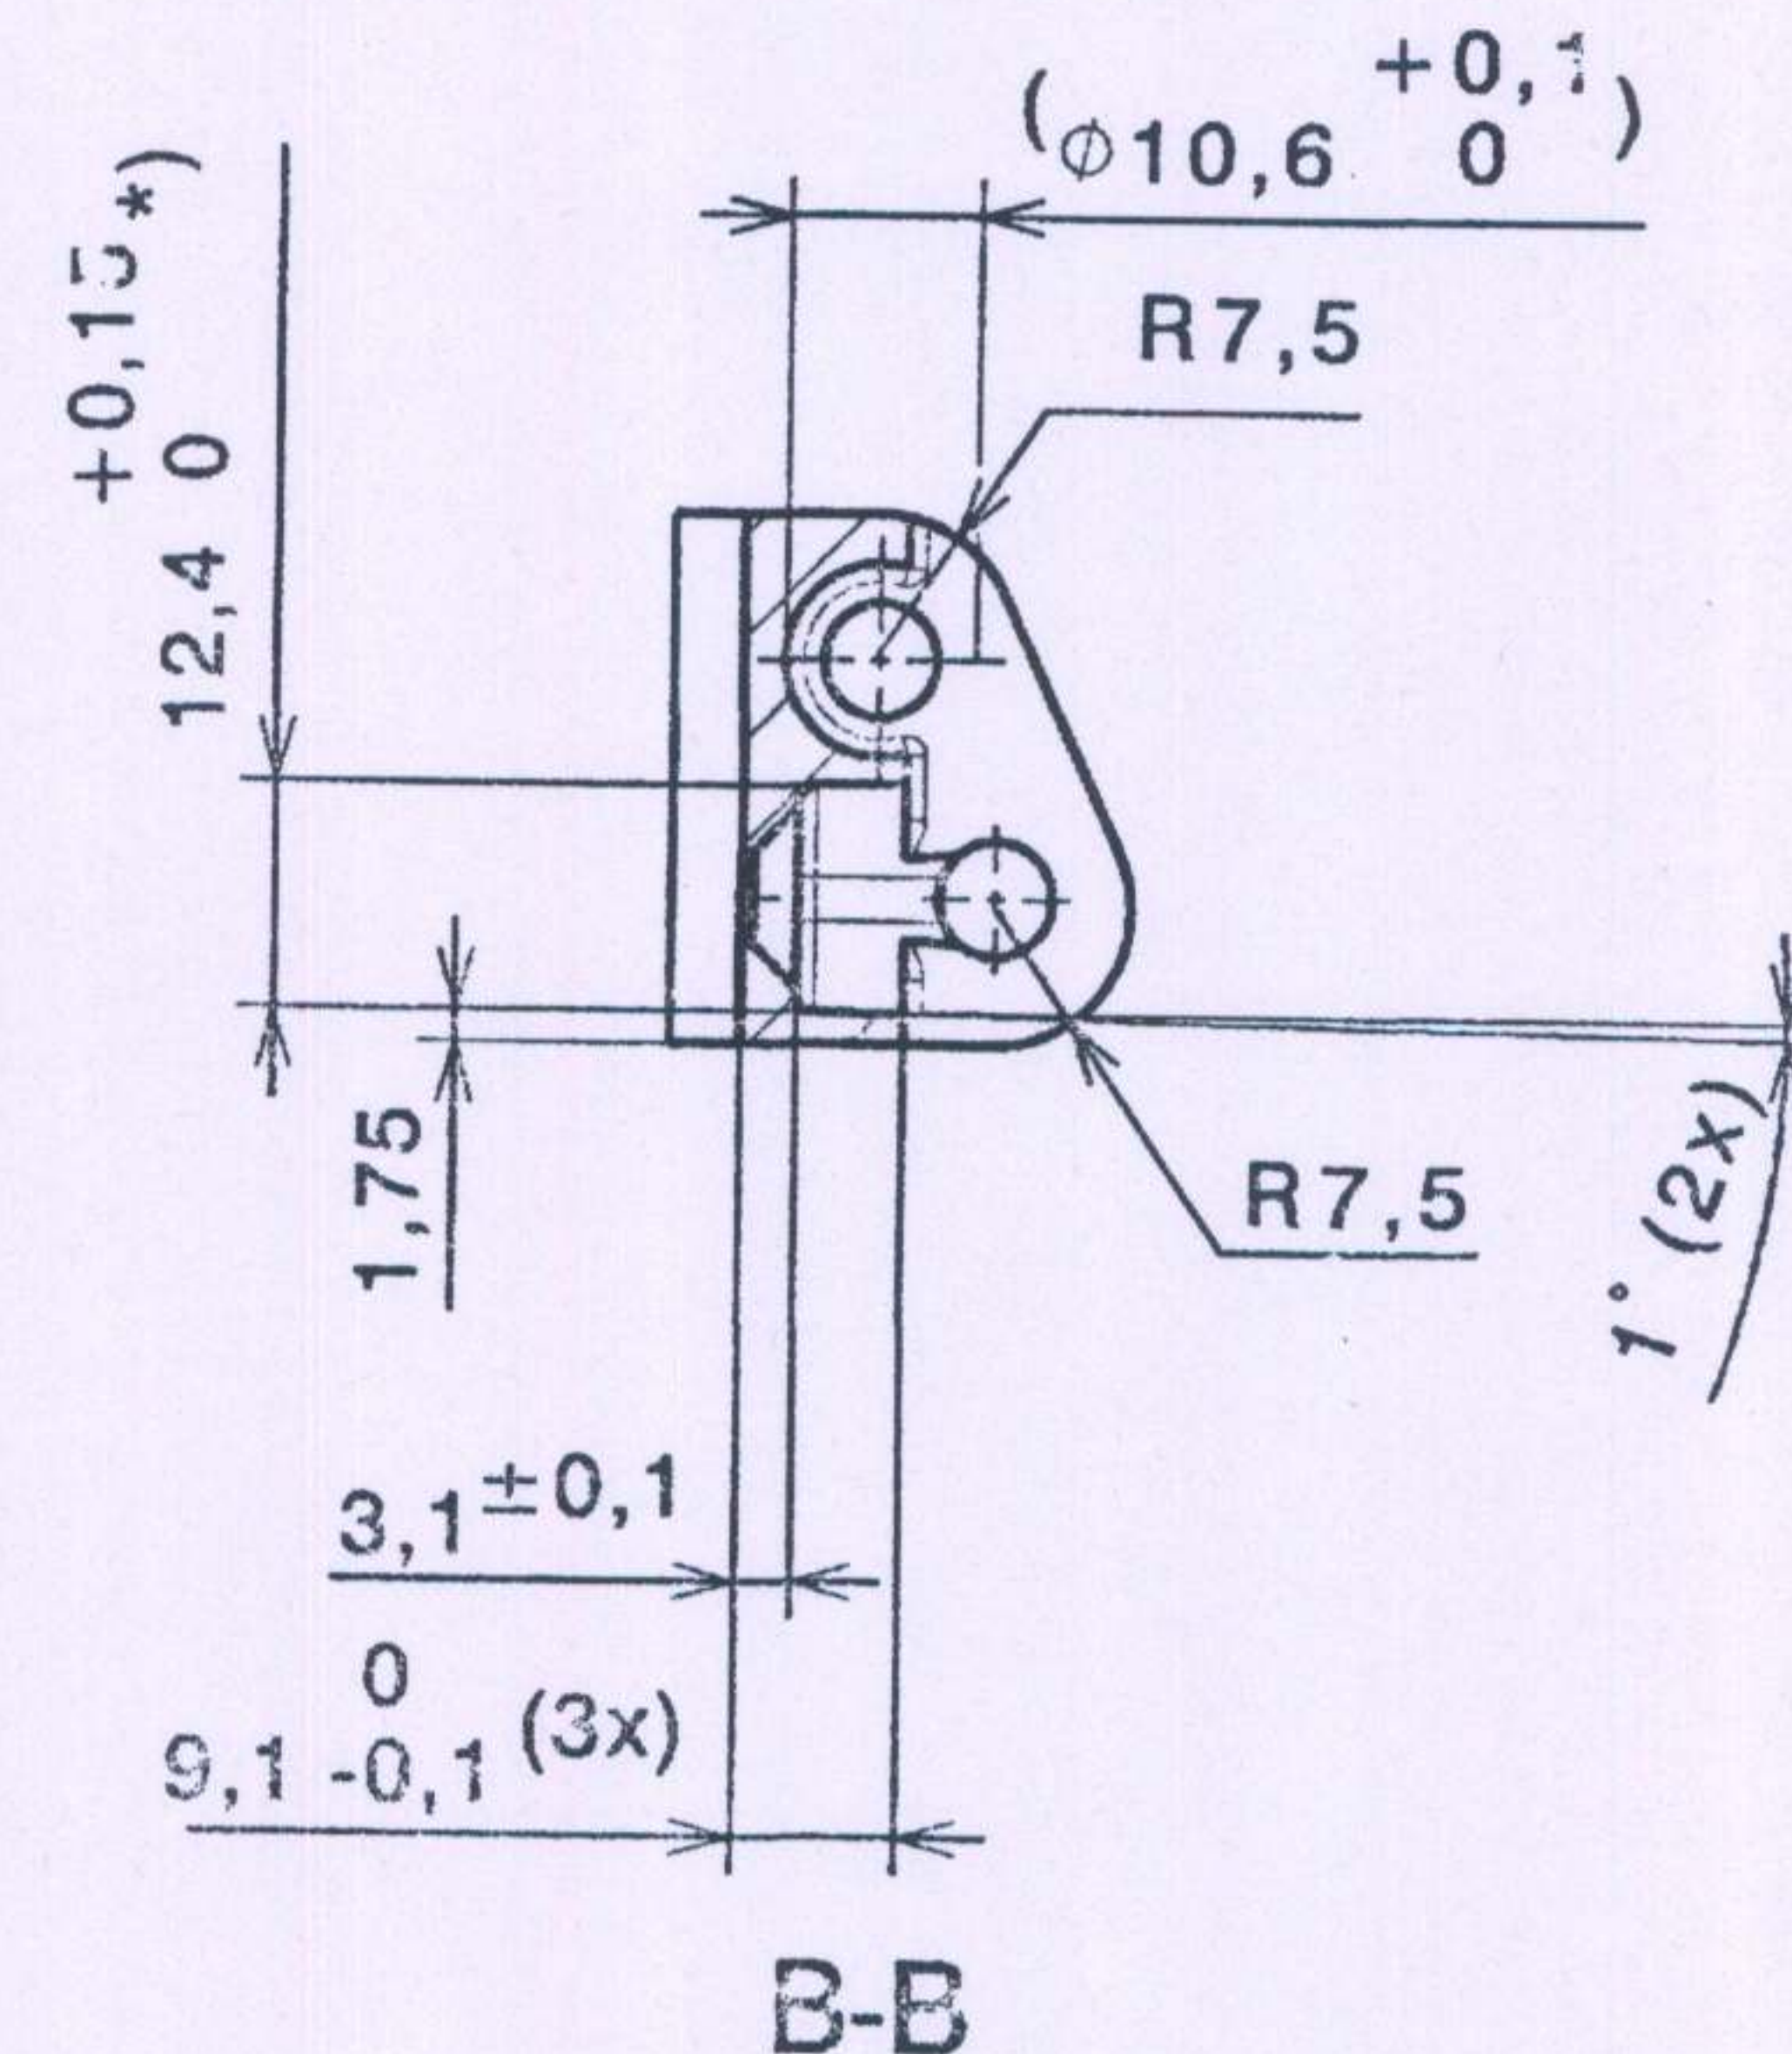


INDIG MATL:- IS: 617-1994 DESIGNATION 4628 CONDITION 'M'
CHILLED CAST.

*) Applies to min dimension

**) Anodized AA Class 20 Black according to Technical specification

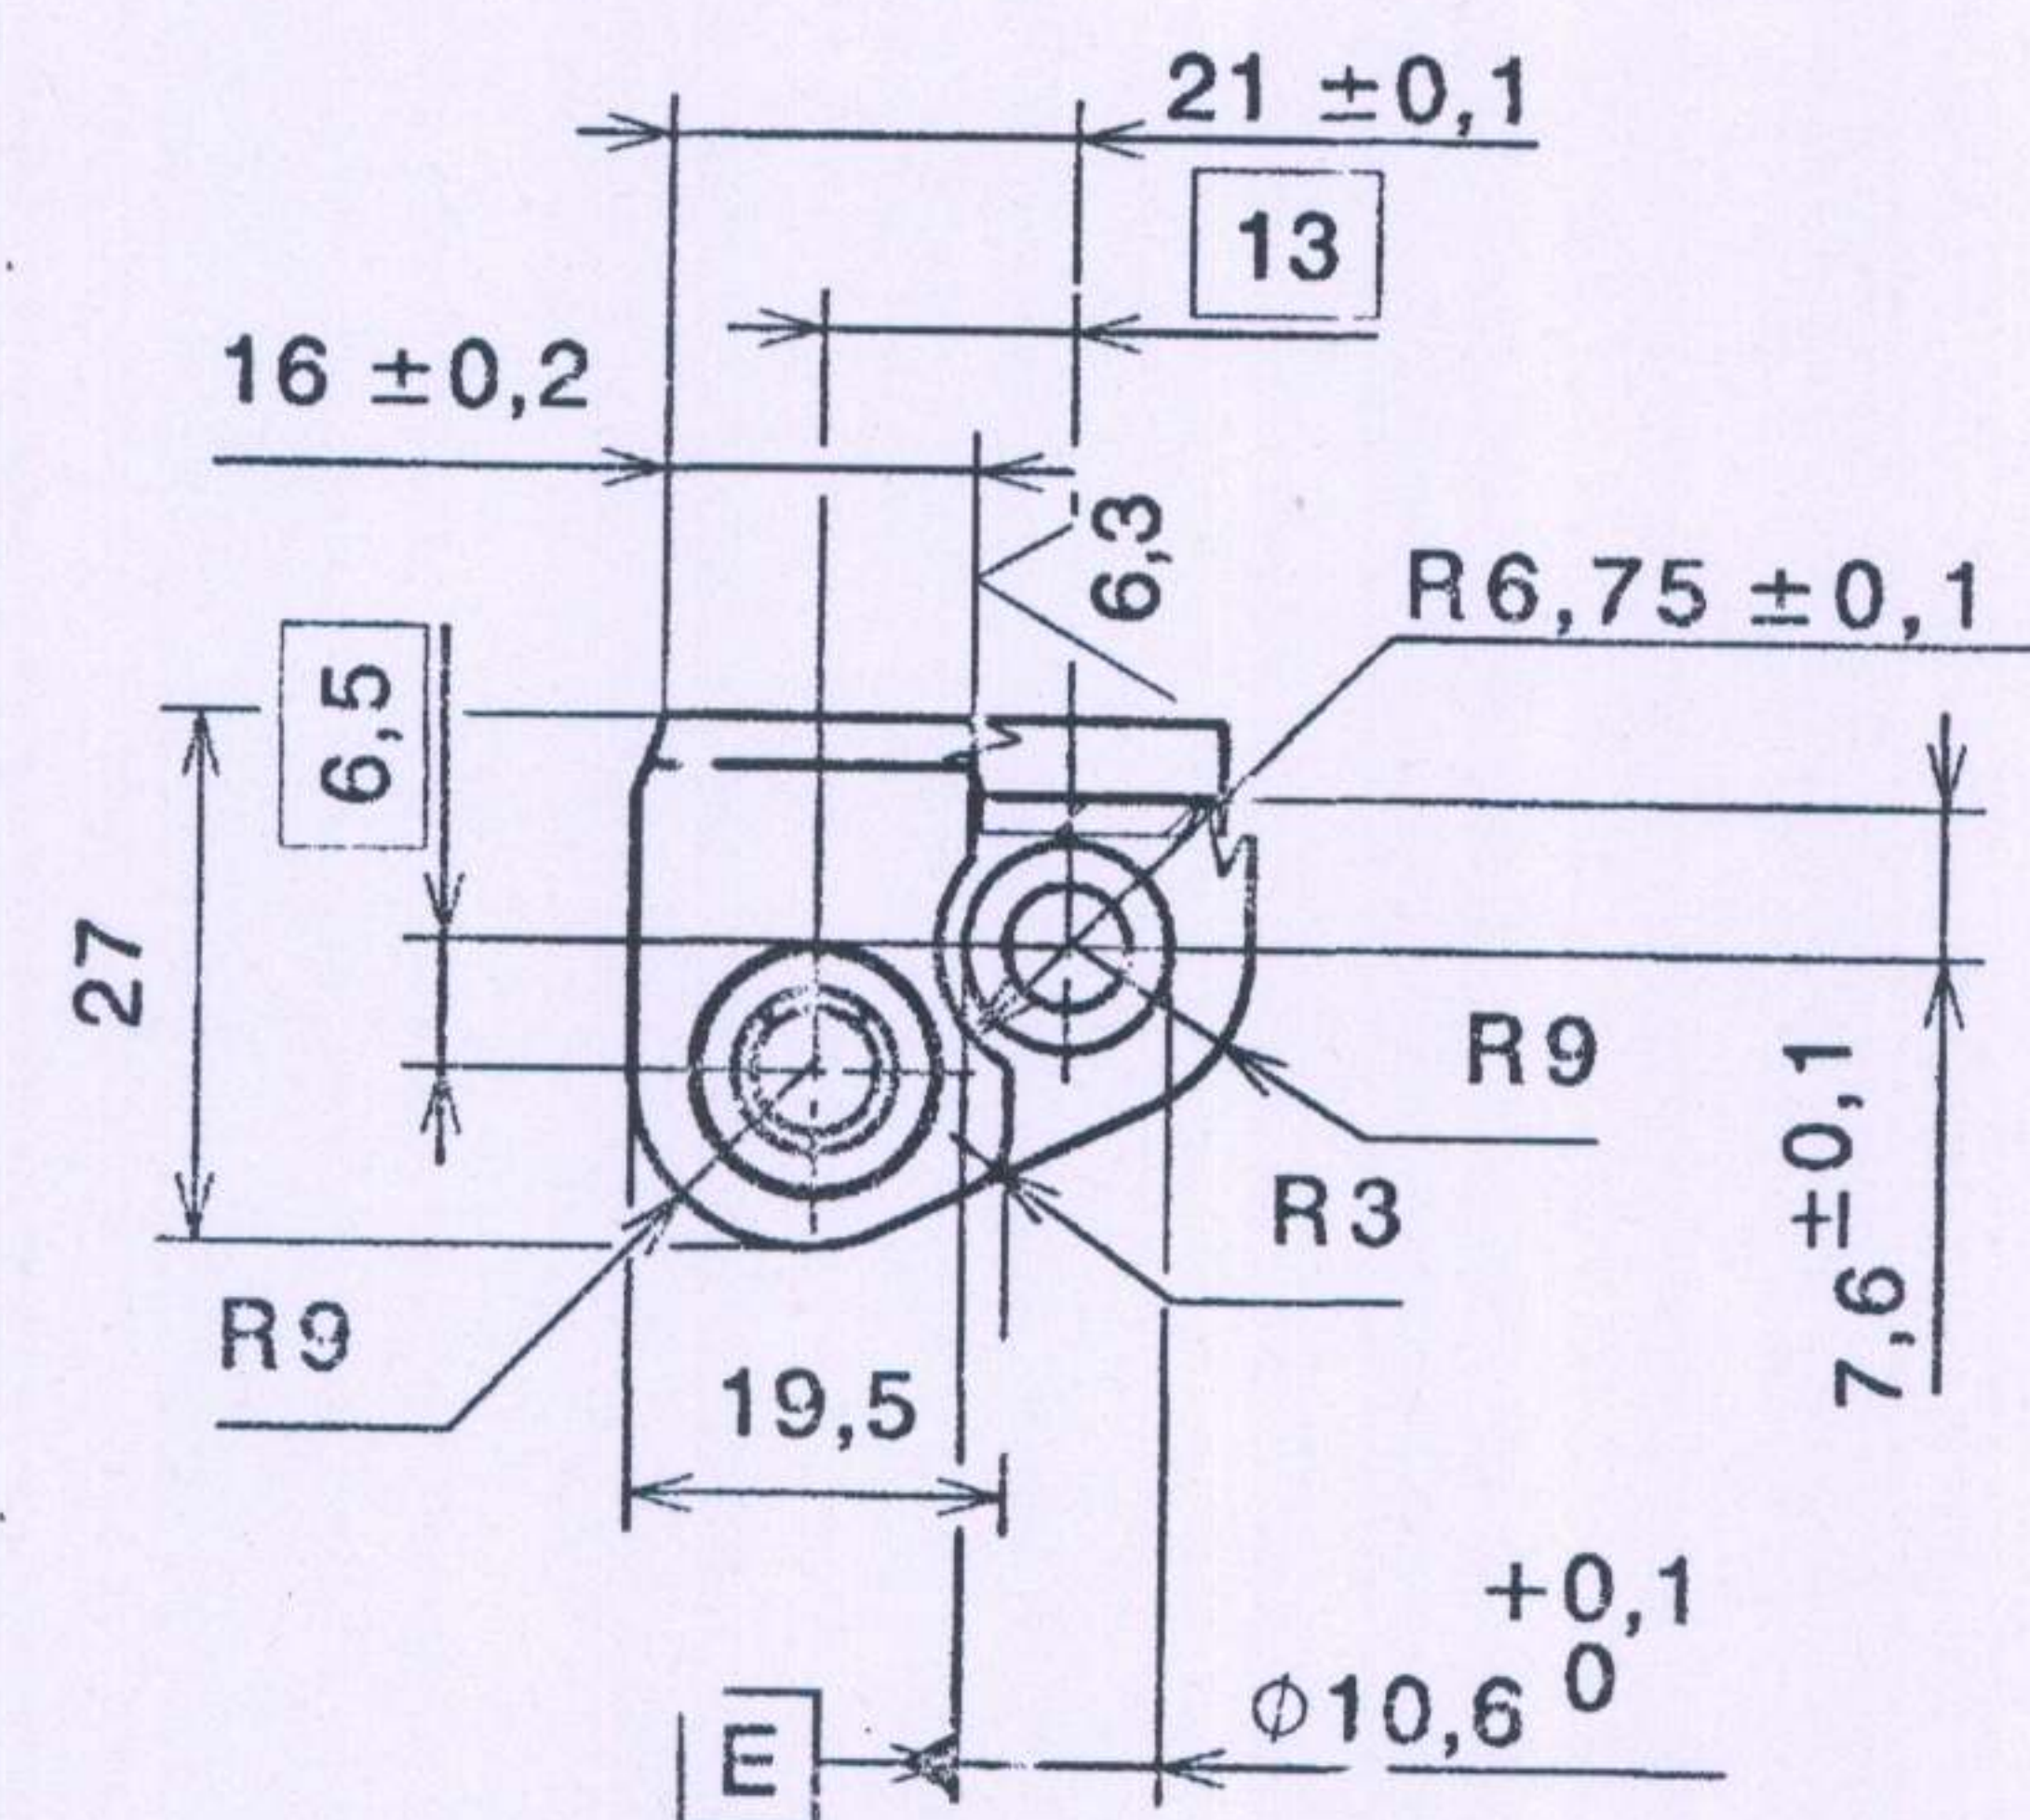

DATE		AUTHORITY		AMENDMENTS		SIG AHSP	SIG DO
PREV DC :-							
DRG SEALED :- 19540-W DT 14-11-2016				SCANNED :- MK		CHECKED :- <i>Shikhar</i>	
CQA (W) , JABALPUR							
Material SS Al 4250-10 It EN 1706, AC-46100 -DF							
Ytbehandling Surface treated **)						Artikelnummer Part number F1303-028081	
Generell ytmänhet General surface roughness Ra 6,3		Skala Scale 1:1		DIMENSIONS AFTER SURFACE TREATMENT			
Skarpa kanter brutna Sharp edges broken 0,3max							
Form- och lägetol enl. Form & pos tol acc. to ISO 1101		Hållfillet —		Generell tolerans General tolerance ISO 8062-CT5		Generell radiö General Radius —	
Utfärdad av Issued by Mikael Lindgren		Datum Date yyyy-mm-dd 2015-02-03		Dokumentstatus Document status AUTHORIZED		Change order number 601010555	
Godkänd av Approved by Anders Nyman		Datum Date yyyy-mm-dd 2015-02-06		Informationssystem företagssekretess COMPANY RESTRICTED		Classification Company Confidentiality COMPANY RESTRICTED	
Informationsklass exportkontroll Classification Export Control EXPORT CONTR LLED				Informationsklass försvarsekretess Classification Defence Secrecy UNCLASSIFIED			
Dokumenttitel Document title Rear Sight Base				Dokumentnummer Document number 301141575			
FFV Ordnance AB				Utgåva Issue 2		Sida Sheet 1/1	