
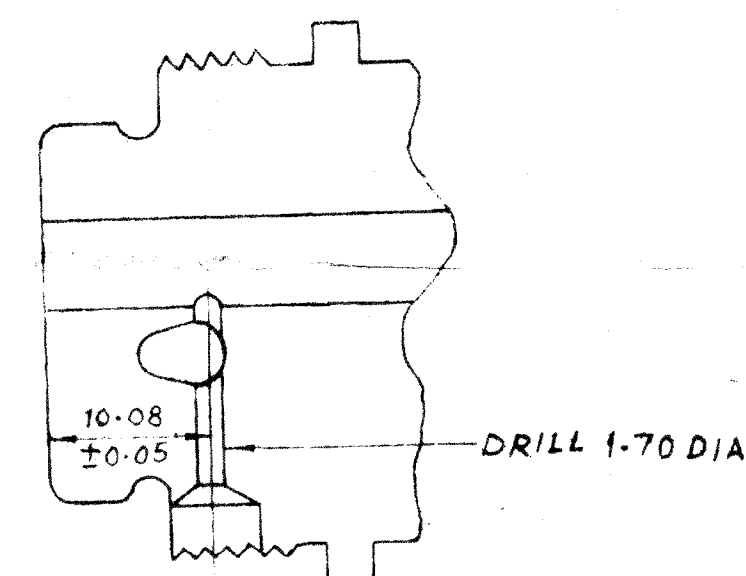
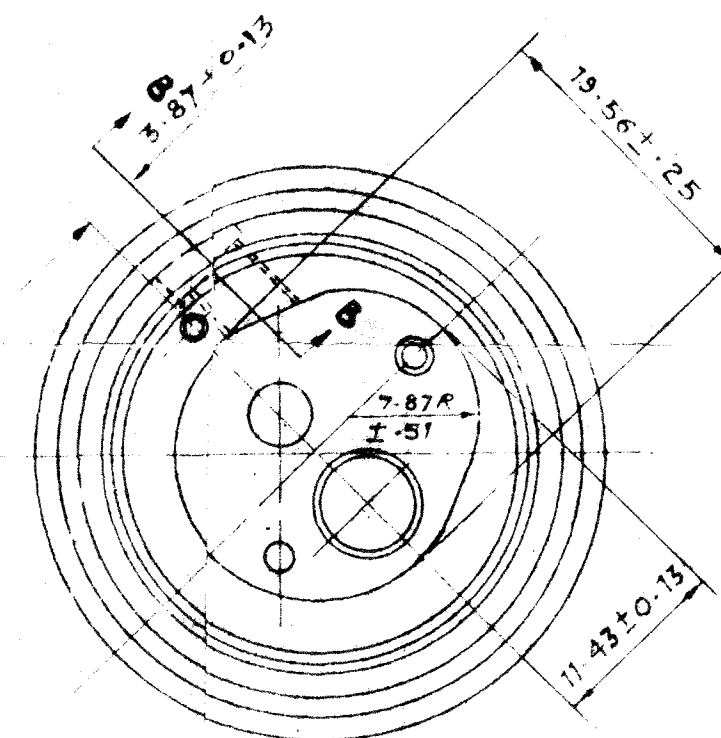


SECTION AA WITH PART SECTION BB

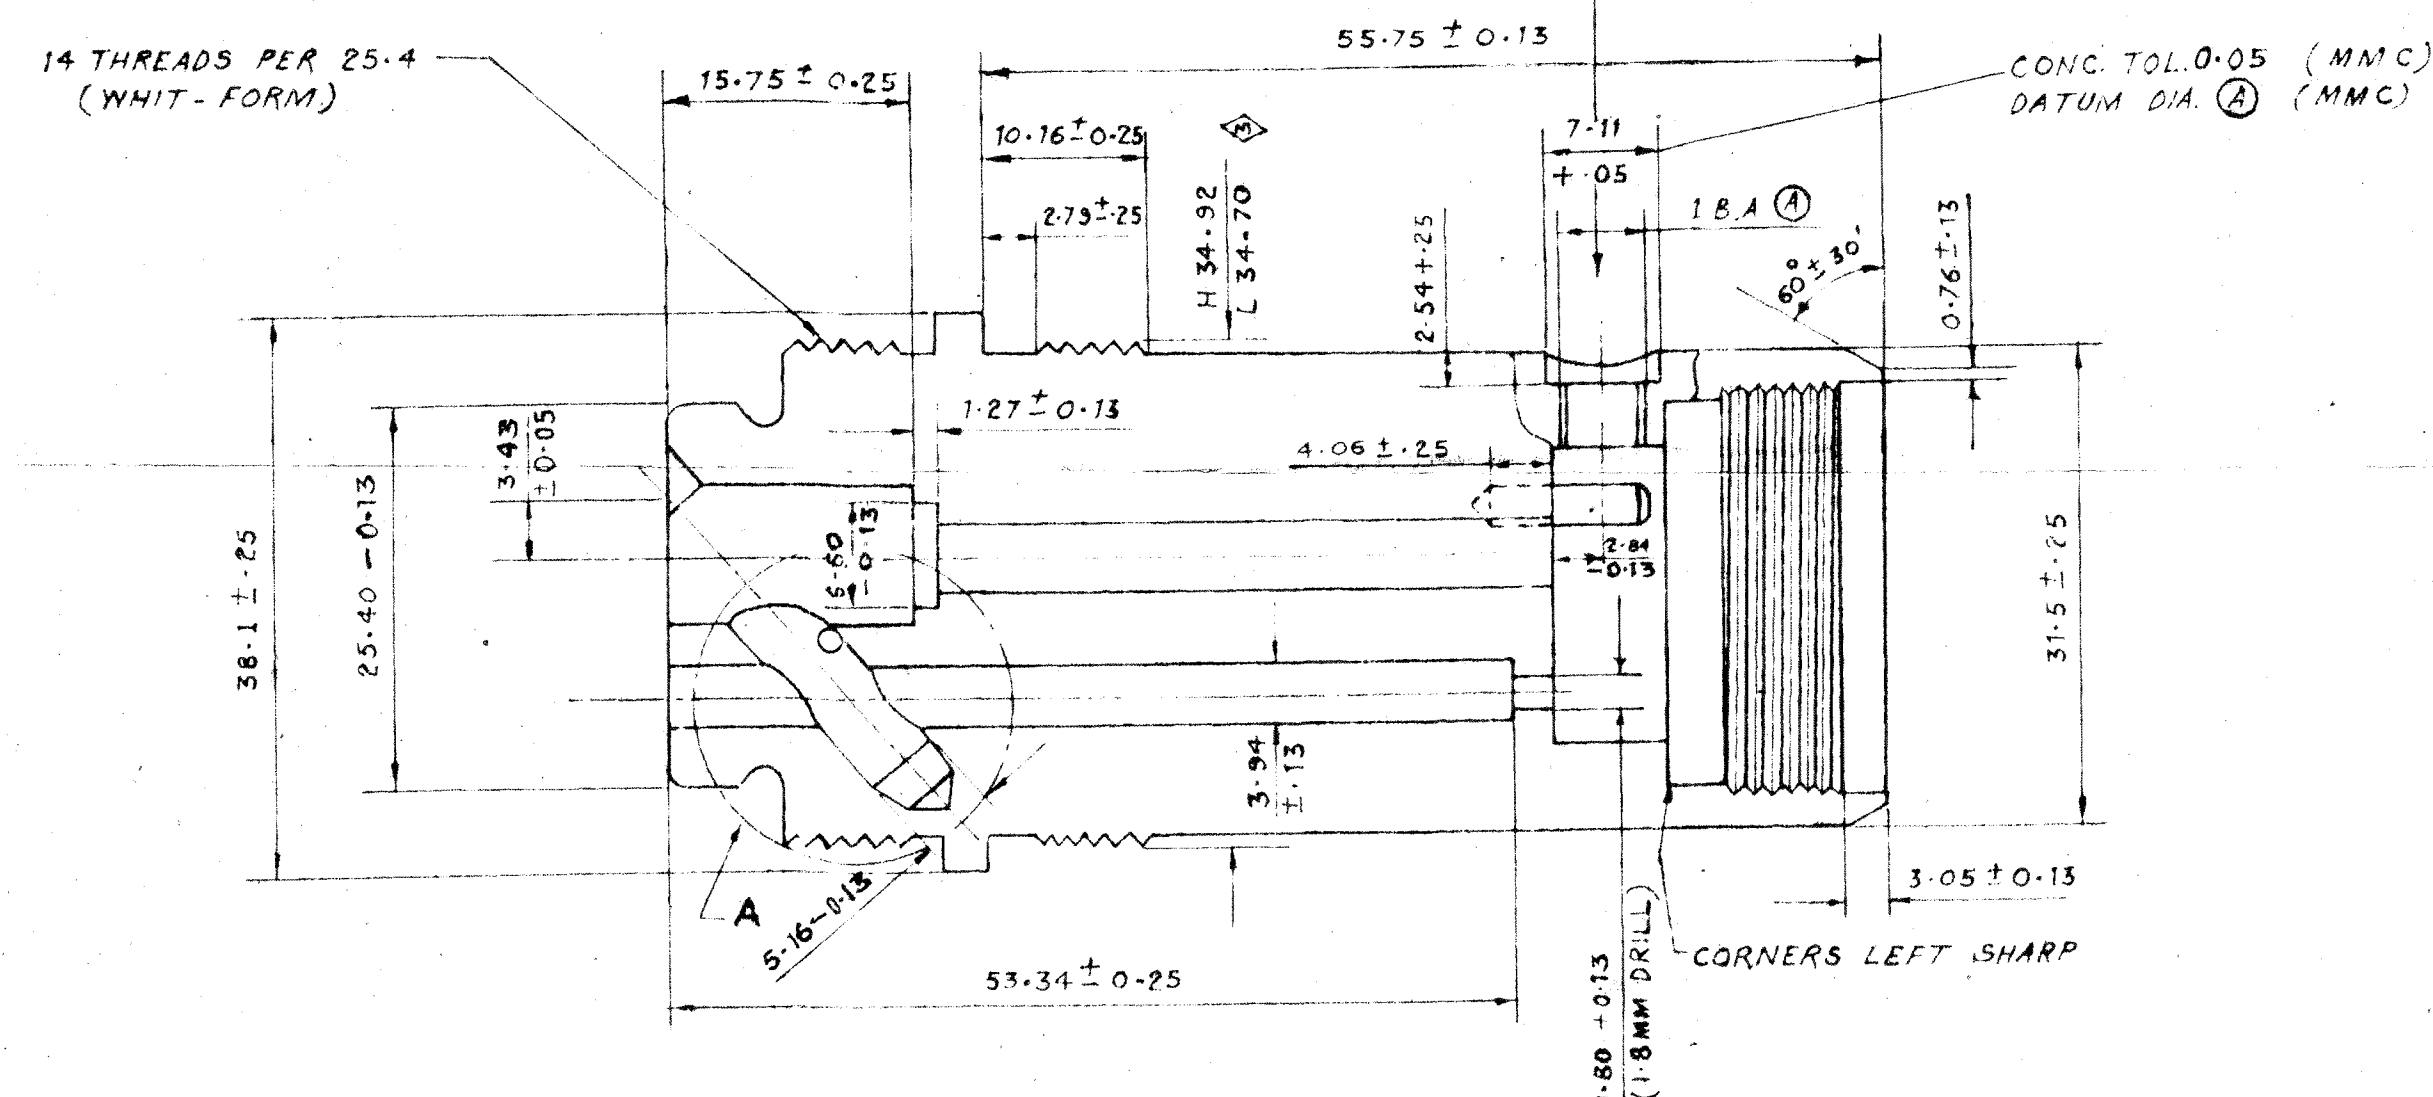

PART SECTION EE

a). TOLERANCE ON UNTOLERANCED DIMENSIONS
FOR ONE DECIMAL PLACE $\pm 1/3$
FOR TWO OR MORE DECIMAL PLACES ± 0.13

b). TOLERANCE ON UNTOLERANCED ANGLES.
GIVEN IN DEGREES $\pm 30'$ * GIVEN IN DEGREES AND MINUTE $\pm 5'$

THE PROVISION OF SHUTTER GAUGING HOLE IS OPTIONAL
TO BE PASIVATED TO SPECN L 10205 (LATEST ISSUE.)




ALL BURRS & SHARP EDGES TO BE REMOVED
A RADIUS OR CHAMFER OF .51 (MAX) IS PERMITTED IN THE CORNERS
OF BLIND HOLES, RECESSES & STEPS EXCEPT WHERE STATED

DIMENSIONS MARKED THUS (2) TO BE TRUNKATED UP TO 0.051
DIMENSIONS MARKED THUS (3) TO BE TRUNKATED UP TO 0.076

MATERIAL :-

BRASS B.S.2872 - CZ 122 OR BS 2874 - CZ 121 Pb3
IN 'M' CONDITION. (LATEST ISSUE)

PART SECTION CC

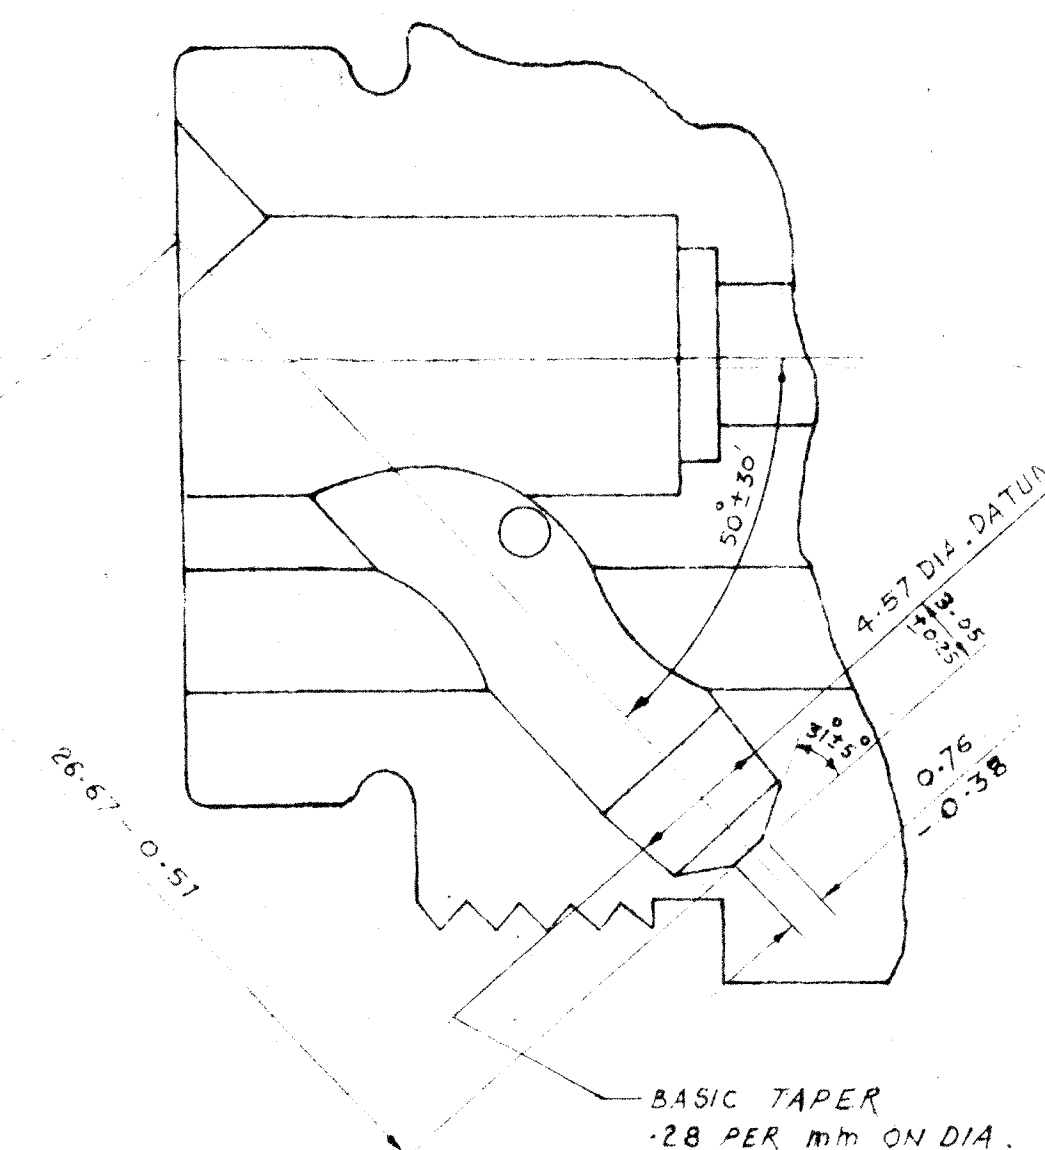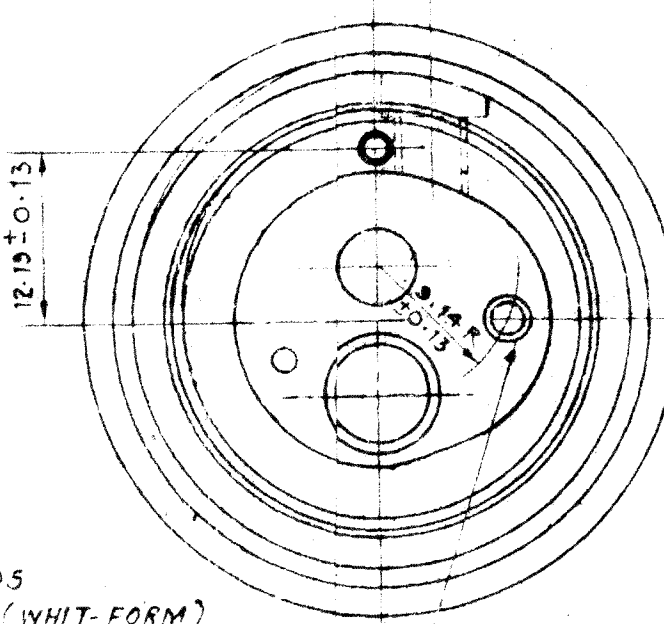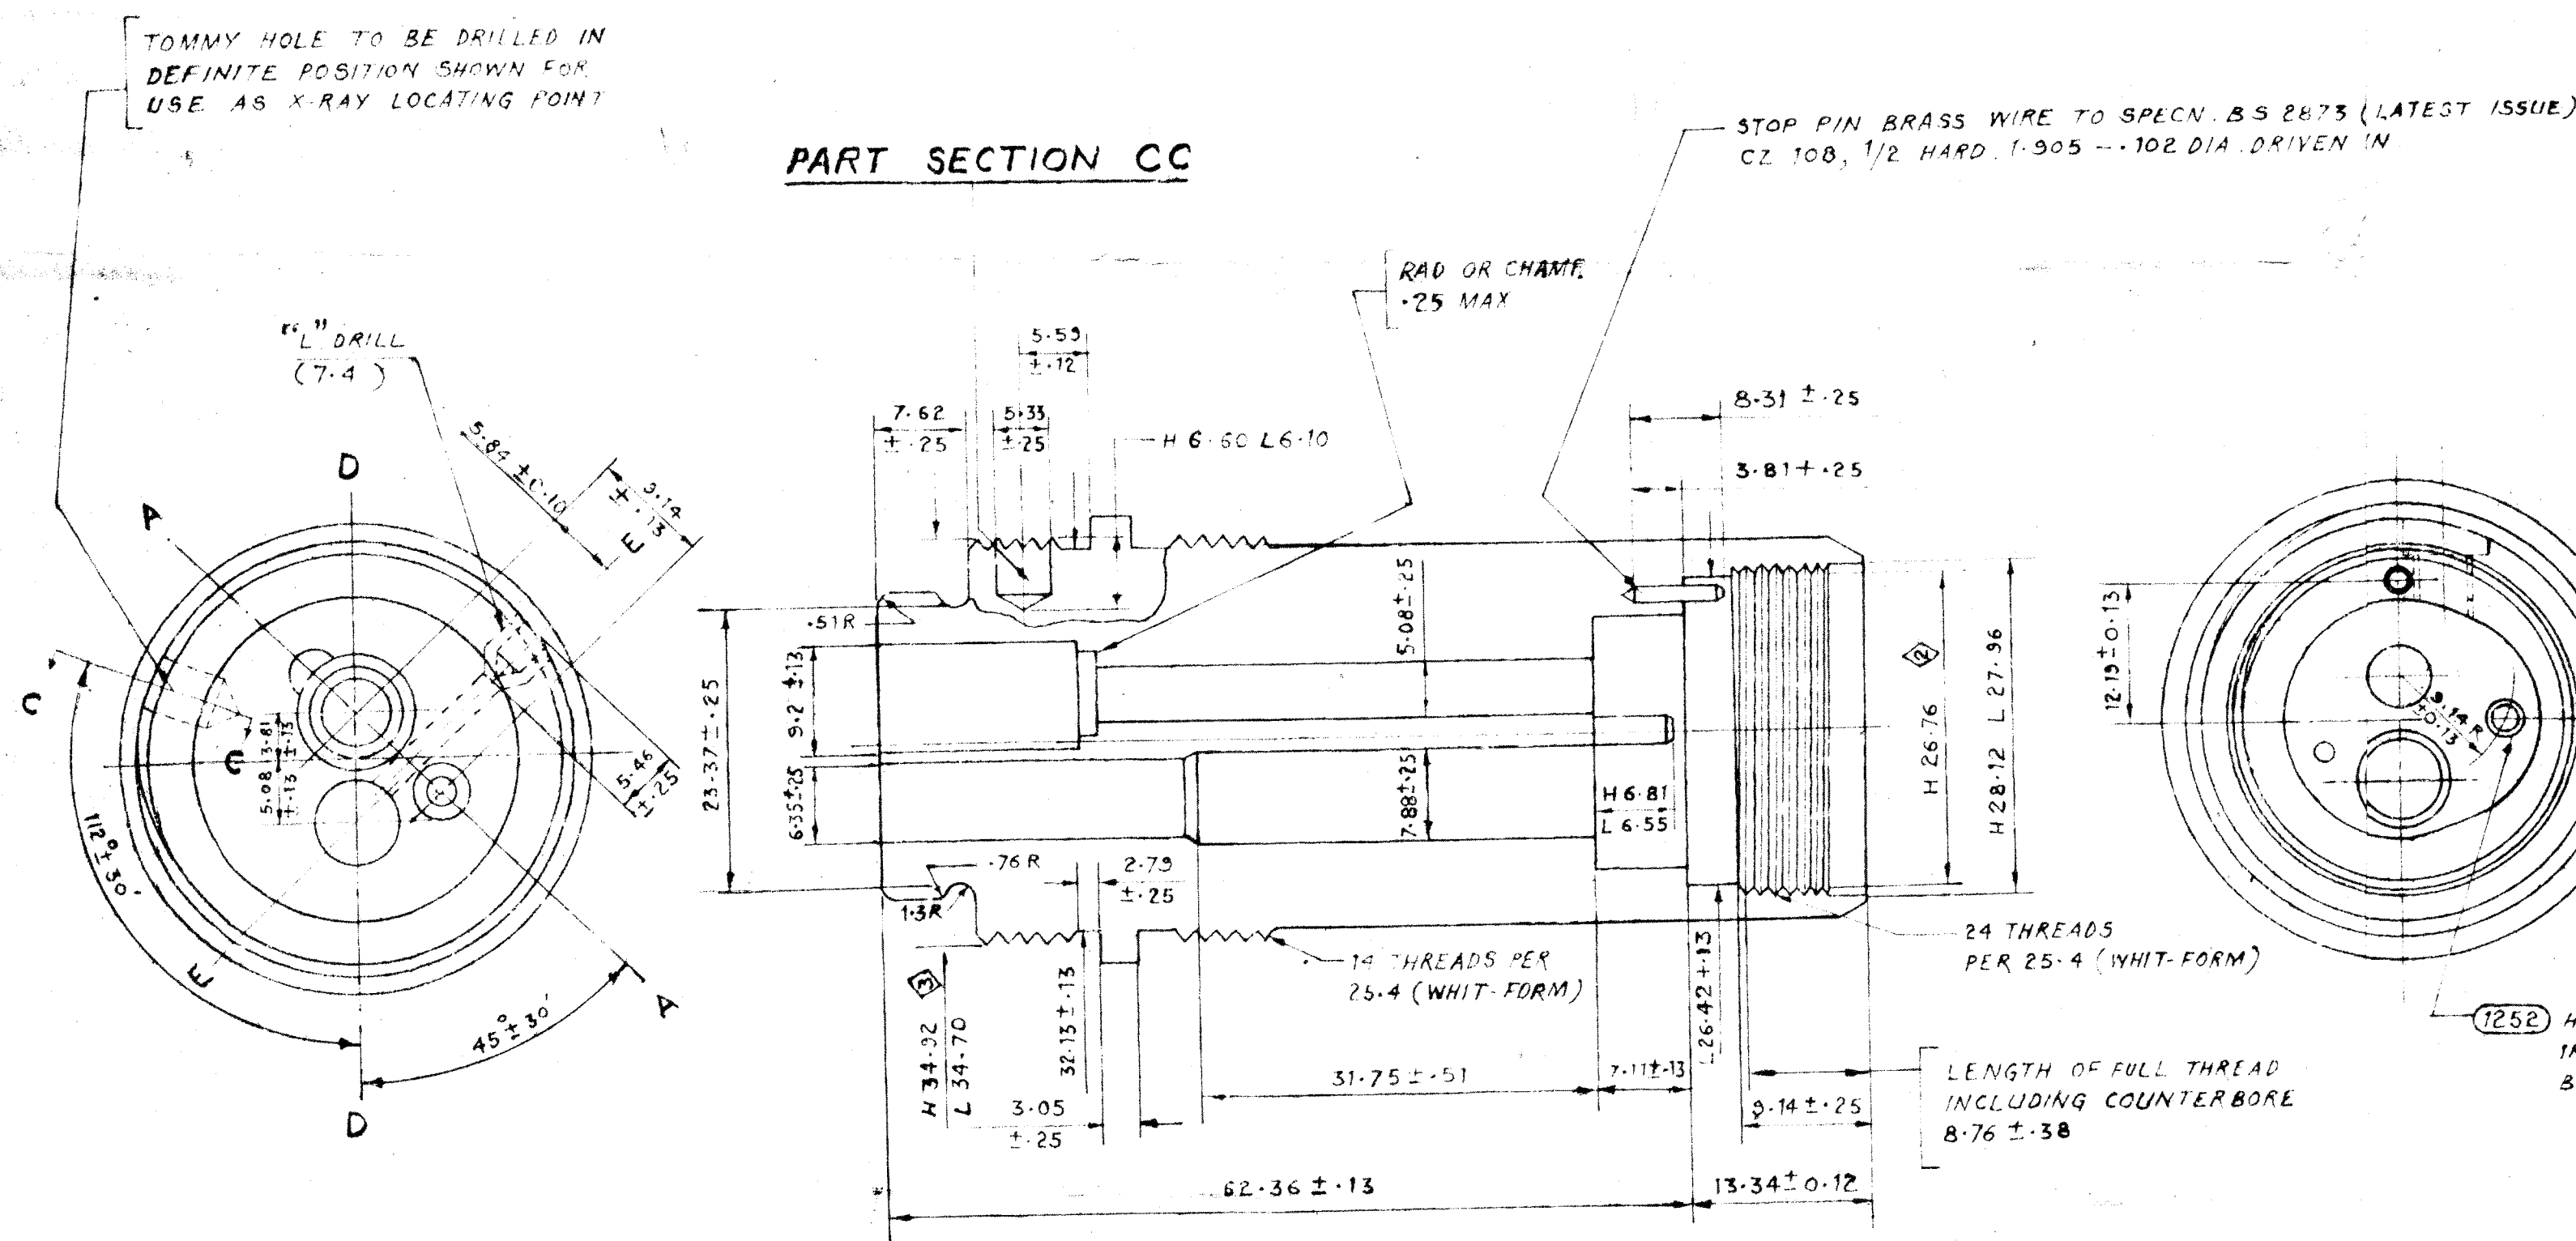

ENLARGED VIEW AT 'A'

SECTION DD WITH PART SECTION CC

10-10-03		SCANNED WITHOUT CHANGE	
30-12-92	D.C 35433-A	DRAMS AMENDED TO 22.25 CAL	1
28-3-99	D.C 34831-A	POINTS AND ASSP. DRB RE-ADDED	2
		MATH: PB3 WAS 5 PB4 LATEST ISSUE AT PED	
12-8-87	D.C1 341356-A	SECTION DD WITH PART SECTION CC SECT. DD LENGTH AMENDED	3
20-6-85	33778-A	DRILL 17021A WAS 1851 DRILL (1-71701A)	4
6-8-84		RETRACTED WITHOUT CHANGE	5
		PRECEDING 2-71010 WAS 2091A, 2095A, A, 21436A, 21502A, 22503A, 20229A, 30502A, 20609A, 20311A, 30508A, 31357A, 31507A, 32848A, 33058A, 33517A, 33601A	6
R 142	DATE AUTHORITY	REVISION	ZONE
			ANSP

DRG SEALED - 30-5-60

DRN F J D	CHD	TCD RDT	COMP R	ASSY DRG :-
C D MAN	O/E DO	SCALE - 21/		1QX35GE, 1QX41GE
APPD	sd-	EST MASS:-		
	FOR C1(A)	GAUGE SCHD:-		
MATE - AS ABOVE	DATE - 18-3-60			
PROTECTIVE FINISH -				

DESIGNER'S REF
I.A.F.D. 130

PART NO
IQX 239

OS-CAT No.

ANSP:- C.I.(A) KIRKEE

BODY