


AL5.803.004CB

-12-

17

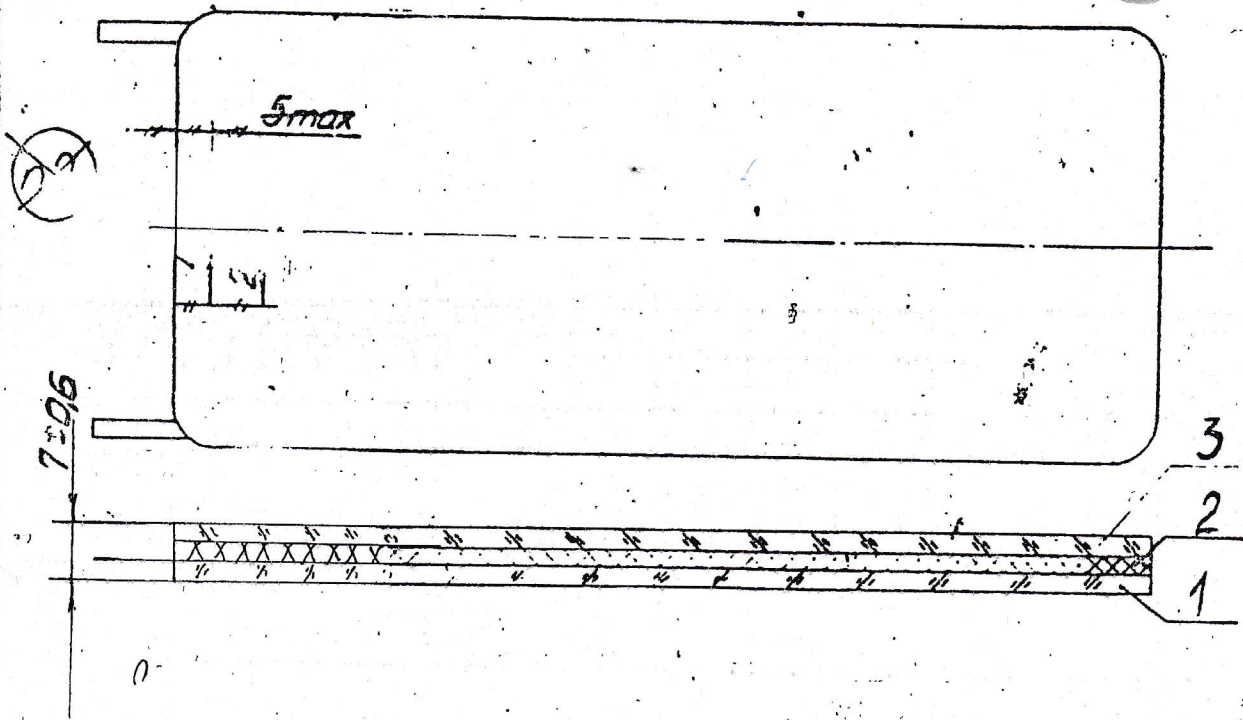

1. Resistance of current conducting coating should correspond to valve; specified in point 8 of drg. AU4.496.088 CB.
3. Displacement of contours of plates should not exceed 1 MM.
4. Projection adhesive film along contour of plates is not allowed.
5. Other technical requirements are as per Technical Specifications TY 3-3.834-78.

I 1454-12

UPDATED UP TO 20.10.88.DD (OLF)

AL5.803.004CB

A/3

D-C-11)-1312-I(P)	16	10.7.89
DRG. PROV. SEALED.		
SMO SHY DOC NO	SIGN	DATE
DRAWN P.R.BABU.		2.8.84.
EDT,CHKO D.K.JAIN		3.8.84
F/M,DC S.R.NAIR		3.8.84
DIV.OFFR T.K.BANERJEE		4.8.84
NAME	SIGN	DATE

PROTECTIVE GLASS  
(Assembly drawing).

SHEET WEIGHT SCALE		
A	0,15	1:1
ROYAL SHEETS		
ORDNANCE FACTORY PROJECT HYDERABAD		

8

Справочный № 115.803.004CB

ВЗМ. УН. № 15319-11 D.C. (D)-1312-I(P)

12913-11