
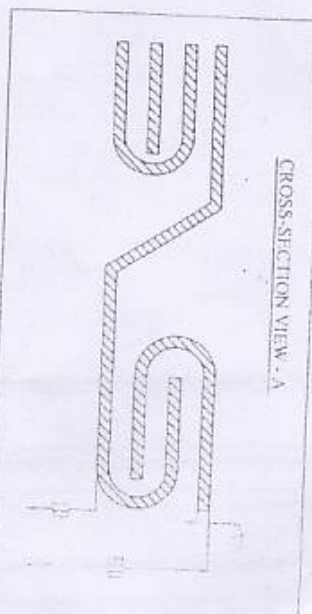


ALL DIMENSIONS ARE IN MM

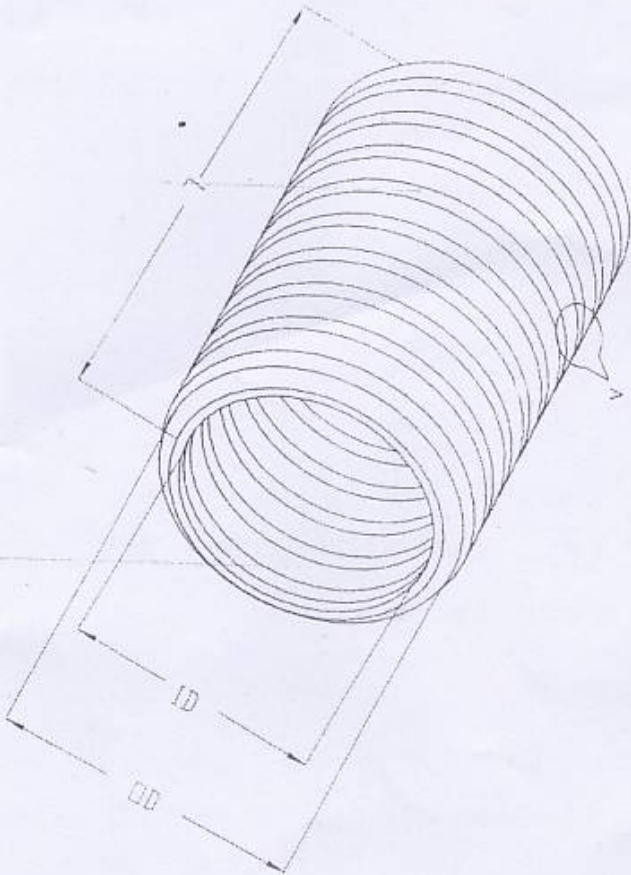

- NOTE:-
1. MATERIAL - STAINLESS STEEL AISI-304
 2. HOSE CONFORMS TO ISO-15465 (DOUBLE OVERLAP UNPACKED TYPE)
 3. RING TO BE WELDED AT THE ENDS
 4. APPLICATION - TO BE USED AS A SIEVE FOR PU HOSES OR SELF RECOVERY WINCH
 5. SAMPLE SHOULD BE APPROVED BEFORE BULK SUPPLY.

Sl. NO.	MINIMUM DIA (Ø) IN mm	MAX OUTER DIA SHEET THICK (Ø) IN mm	LENGTH (L) IN METER PER VEH
1.	48	59	3.7
2.	48	59	2.7
3.	75	89	1.7

AMENDMENT N°:- (i) ITEM NO. 1 LENGTH AMENDED FROM 1.5 m TO 1.7 m.

- (ii) ITEM NO. 2 LENGTH AMENDED FROM 2.5 m TO 2.7 m, Ø AMENDED FROM 31mm TO 48mm & OD 39mm TO 59mm.
- (iii) ITEM NO. 3 LENGTH AMENDED FROM 3.5 m TO 3.7m, Ø AMENDED FROM 31mm TO 48mm & OD 39mm TO 59mm.

ITEM	DESCRIPTION	NO. OF	MAT.	TREAT/SITE	REMARKS
INDEX	ALTERNATION	STDA	DATE	UPGRADE	DIR/DOC
DATE	NO.	NO.	NO.	NO.	NO.
0-30	40.1				
30-40	40.2				
40-50	40.3				
50-60	40.4				
60-70	40.5				
70-80	40.6				
80-90	40.7				
90-100	40.8				
100-110	40.9				
110-120	40.10				
120-130	40.11				
130-140	40.12				
140-150	40.13				
150-160	40.14				
160-170	40.15				
170-180	40.16				
180-190	40.17				
190-200	40.18				
200-210	40.19				
210-220	40.20				
220-230	40.21				
230-240	40.22				
240-250	40.23				
250-260	40.24				
260-270	40.25				
270-280	40.26				
280-290	40.27				
290-300	40.28				
300-310	40.29				
310-320	40.30				
320-330	40.31				
330-340	40.32				
340-350	40.33				
350-360	40.34				
360-370	40.35				
370-380	40.36				
380-390	40.37				
390-400	40.38				
400-410	40.39				
410-420	40.40				
420-430	40.41				
430-440	40.42				
440-450	40.43				
450-460	40.44				
460-470	40.45				
470-480	40.46				
480-490	40.47				
490-500	40.48				
500-510	40.49				
510-520	40.50				
520-530	40.51				
530-540	40.52				
540-550	40.53				
550-560	40.54				
560-570	40.55				
570-580	40.56				
580-590	40.57				
590-600	40.58				
600-610	40.59				
610-620	40.60				
620-630	40.61				
630-640	40.62				
640-650	40.63				
650-660	40.64				
660-670	40.65				
670-680	40.66				
680-690	40.67				
690-700	40.68				
700-710	40.69				
710-720	40.70				
720-730	40.71				
730-740	40.72				
740-750	40.73				
750-760	40.74				
760-770	40.75				
770-780	40.76				
780-790	40.77				
790-800	40.78				
800-810	40.79				
810-820	40.80				
820-830	40.81				
830-840	40.82				
840-850	40.83				
850-860	40.84				
860-870	40.85				
870-880	40.86				
880-890	40.87				
890-900	40.88				
900-910	40.89				
910-920	40.90				
920-930	40.91				
930-940	40.92				
940-950	40.93				
950-960	40.94				
960-970	40.95				
970-980	40.96				
980-990	40.97				
990-1000	40.98				

VEHICLE FACTORY JABALPUR

REFERENCE NO. 2756-57-3/A

DATE