


1 2 3 4
 D.S. CAT. 5315-001512 DIMS. ARE IN mm.

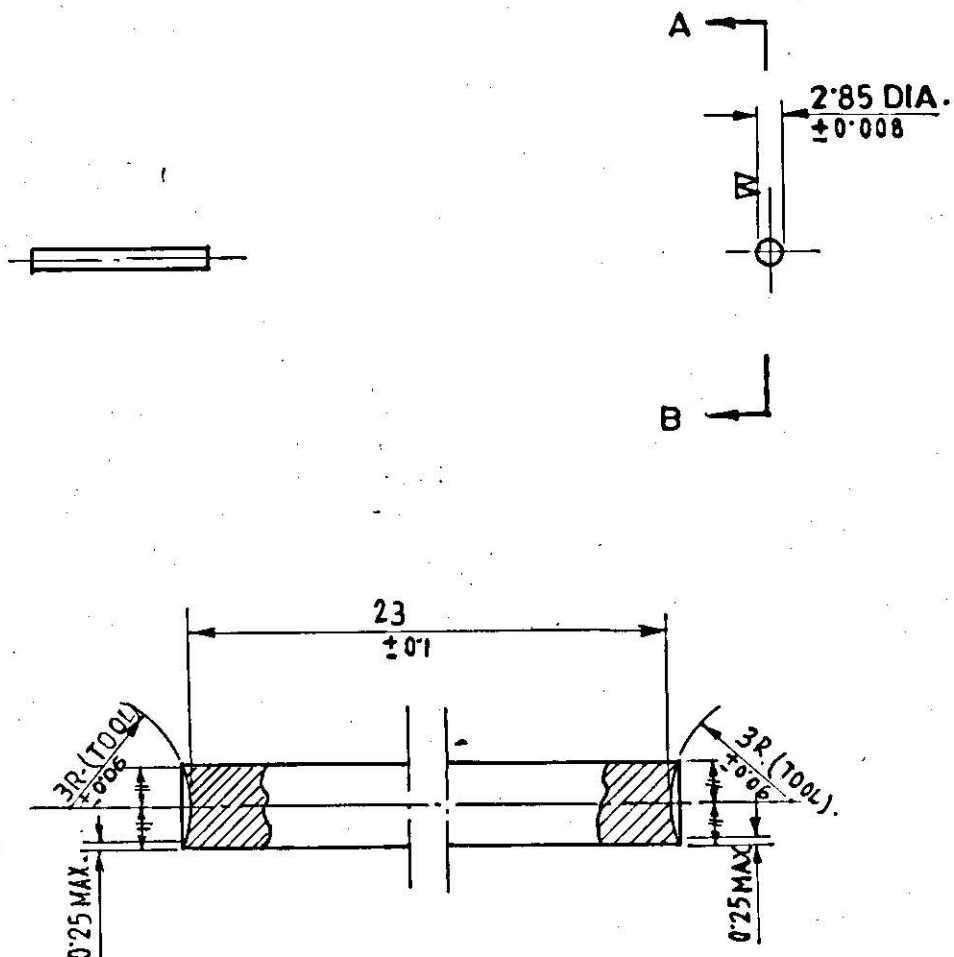

PARTIAL SECTION-AB
 SCALE:- 4:1

SURFACE FINISH:-
 AS PER IS:3073-1967 WHERE NOT
 SPECIFIED SHOULD BE ∇

DC No. 27015-SA, DT. 16-01-2017 :- MATERIAL AMENDED

28-10-04	26000-SA	PROFORMA CHANGED, PROTECTIVE FINISH & SURFACE FINISH AMENDED, NEG. RE-TRACED & DRG. RE-SEALED.		<i>for C.D.</i>	<i>for DAC</i>
		PREVIOUS D.C. NOS. 15550-SA, 16511-SA, 18131-SA, 21670-SA, 23268-SA & 25355-SA.		COPY	COPY
DATE	AUTHY.	BRIEF RECORD	ZONE	I/C; D.O.	G.O.
SEALED :- D.C.No. 25355-SA, DT. 07-5-02.					SIGN.

DRN. CHD. TRD. *Baruk* COMP. *slat* AHSP. CQA(SA), ICHAPUR
 SCALE :- 1:1, 4:1 EST. MASS.


DT. 28-10-04 *for I/C; D.O.* APPROVED. DT. (NEG. RE-TRACED) ASSY. 1005-006824

MATERIAL :- IS: 5517-1993 DESIGNATION 40C8

H.T./HARDNESS :- QUENCHED & TEMPERED 90-110KG/mm²

PROTECTIVE PHOSPHATE TO SPECN. JSS:0465:01-1994,
 FINISH :- CLASS II (ACCELERATED), OIL FINISH.

NOMENCLATURE :- CENTRAL PAWL AXIS



DGMR'S
 REF.

PART No 65 BE

DRG.No. A 1336

D.S. CAT. 5315-001512
 No.