


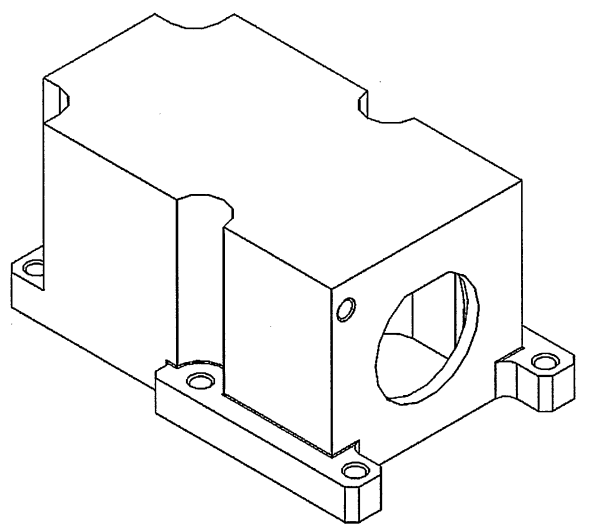

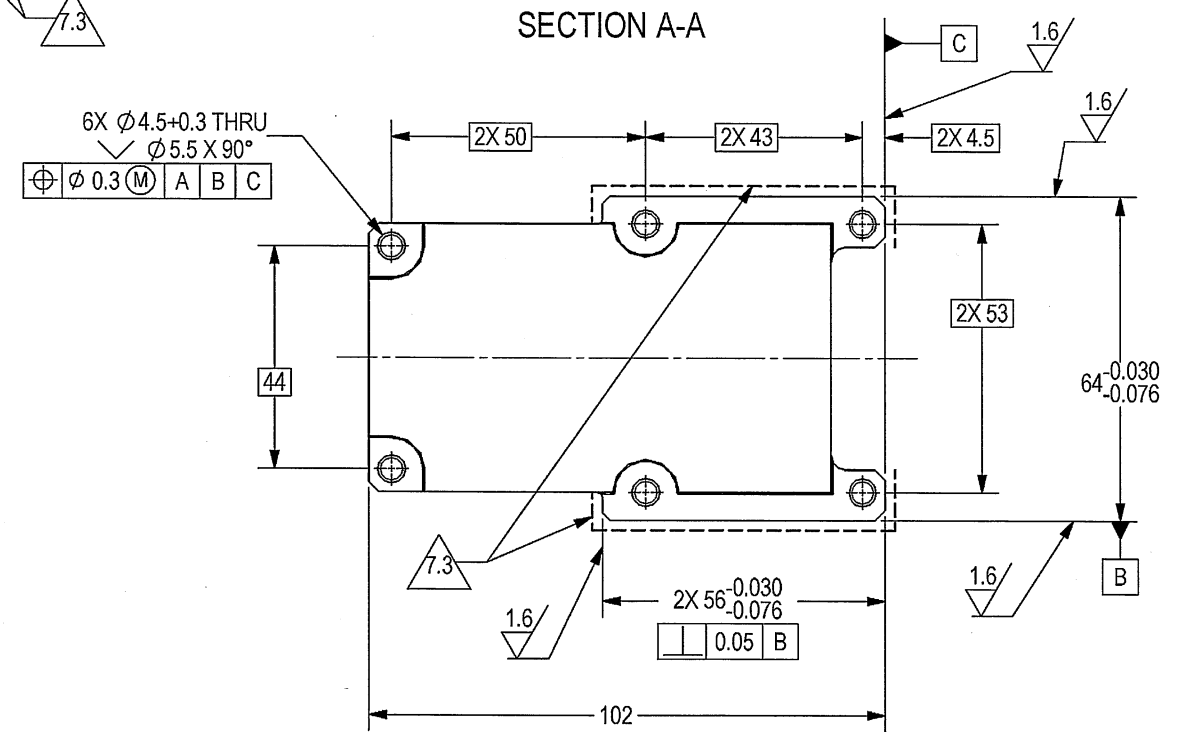
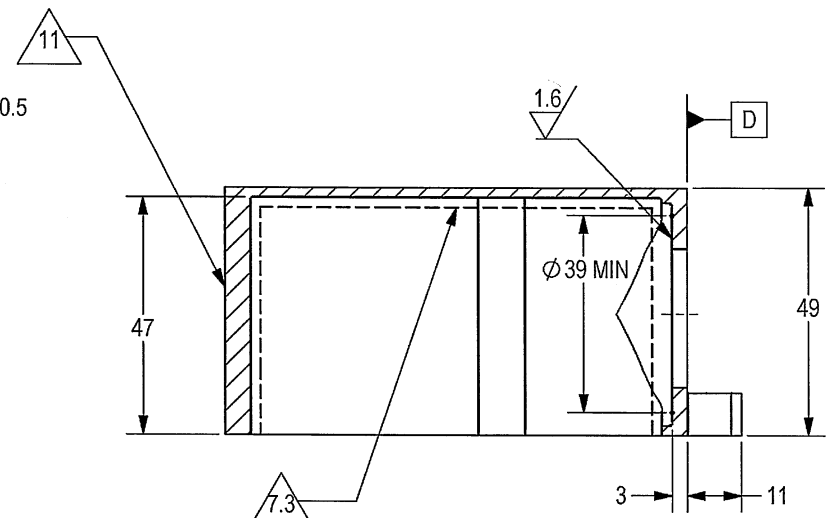
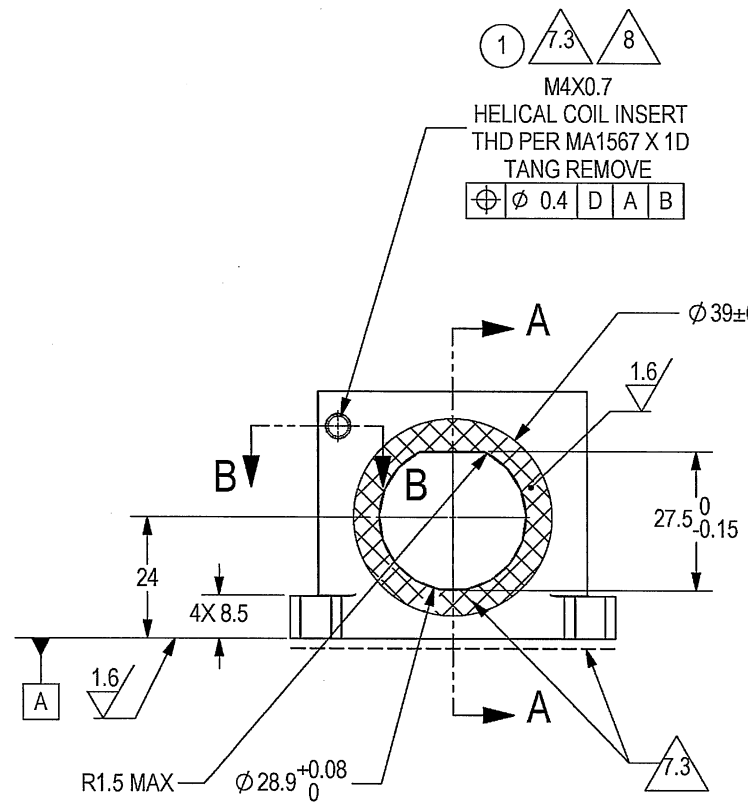
THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PROPRIETARY AND CONFIDENTIAL TO OFT. NO PERSON OR ENTITY IS ALLOWED TO COPY, REPRINT, REPRODUCE OR PUBLISH ANY PART OF THIS DOCUMENT, NOR DISCLOSE ITS CONTENTS TO OTHERS, NOR MAKE ANY USE OF IT, NOR ALLOW OR ASSIST OTHERS TO MAKE ANY USE OF IT UNLESS BY THE PRIOR WRITTEN EXPRESS AUTHORIZATION OF OFT AND THEN ONLY TO THE EXTENT AUTHORIZED.
COPYRIGHT-OFT.

SHEET REV STATUS
ALL SHEETS ARE THE SAME REVISION

REVISION RECORD				
REV	ECO	DESCRIPTION	DATE	APVD
01		Freeze	08-Aug-13	
02		Freeze	03-Dec-13	
03		Restricted	02-Sep-14	L. Goldshtein
--	T00065	Identical To Previous Released	09-Apr-18	L. Goldshtein


NOTES:

1. INTERPRET THIS DRAWING IAW ASME Y14.100M.
2. MATERIAL: ALLUMINUM ALLOY PLATE 6061-T651 PER AMS-QQ-A-250/11.
3. UNLESS OTHERWISE SPECIFIED, UNDEFINED MACHINED FILLET MAX RADII SHALL BE 0.2...0.3.
4. DEBURR AND REMOVE SHARP EDGES, APPROX. 0.3X45 Deg.
5. ALL DIMENSIONS ARE BEFORE COATING.
6. GENERAL TOLERANCES ACCORDING TO ISO 2768-m.
7. FINISH:
 - 7.1. CHEMICAL CONVERSION COATING PER MIL-DTL-5541F TYPE I CLASS 3.
 - 7.2. ANODIC COATING PER MIL-A-8625 TYPE II 20±5 MICRON THICK CLASS 2, COLOR BLACK # 37038 PER FED-STD-595.
- 7.3. PROTECT SPECIFIED THREADS AND MARKED AREA (---, ) AGAINST ANODIC COATING.
8. INSTALL INSERTS AFTER FINISH PER MS33537 USING PRIMER EPOXY PER MIL-P-53022.
9. QUALITY ASSURANCE PROVISIONS:
 - 9.1. QUALITY ASSURANCE PROVISIONS FOR THIS ITEM PER RDMQD00012P.
10. PARENTHETICAL FIGURES ARE FOR REFERENCE ONLY.
11. IDENTIFY PART PER MIL-STD-130 RUBBER STAMP WITH EPOXY INK PER A-A-56032 TYPE II IN CONTRASTING COLOR. CHARACTERS MINIMUM TEXT HEIGHT 1.25 MM. MEETING REQUIREMENTS OF MIL-STD-202F METHOD 215J. LOCATION APPROX. AS SHOWN.
12. PACKAGING AND PACKING: THE FINISHED PART SHALL BE PRESERVED AND PACKAGED IN ACCORDANCE WITH MANUFACTURER'S BEST COMMERCIAL PRACTICE.



(WEIGHT APPROX.: 0.19 Kg)

SEE SEPARATE PARTS LIST
SEE ATTACHED MEDIA

UNLESS OTHERWISE SPECIFIED		SIGNATURE	DATE	ORDNANCE FACTORY TIRUCHIRAPPALLI	
DIMENSIONS ARE IN MM PER ASME Y14.5 - 2009		DRAWN	11/21/18	FOR: COCKING MECHANISM ASSY	
TOLERANCES		CHECKED		TITLE	
LINEAR	ANGULAR	HOS/DDO		HOUSING CONNECTOR	
SEE NOTE 6	SEE NOTE 6	OFFICER/PRDN		OF: 12.7MM SRCG	
1st ANGLE PROJECTION		OFFICER/QC		SIZE	CAGE CODE
		OFFICER/DDO		C	2291A
SURFACE TEXTURE IN Micro Meter				DWG NO	074253A-00
				SCALE	1:1
				AUTOMATED DRAWING (SW)	SHEET 1 OF 1
				PLM CONTROL	STATUS
				074253A-00 HOUSING_CONNECTOR	WIP

DWG NO 074253A-00
SH 1

OFT

ASSEMBLY PARTS LIST

Assembly Parts List For: 074253A-00

Rev: -

Status: Released

Description: HOUSING CONNECTOR

FN	CMD	PART NUM	ECO	DESCRIPTION	MB	QTY	U/M	REF. DES./REMARKS	MFG. PN / CUSTOMER	LA	LI
1	HM	99662215M		INSERT HCOIL CRES M 4X1D	P	1	Each		60043-TNM4X0.7C-4(SEE NOTES)		





CUSTOMER SENSITIVE

REVISION HISTORY

REV	CHG NO	DESCRIPTION	DATE	APPROVED
01		Freeze	08-Aug-13	
02		Freeze	03-Dec-13	
03		Restricted	02-Sep-14	L. Goldshtein
--	T00065	Released - Identical To Previous	09-Apr-18	Y. Shapira

ALL SHEETS ARE THE SAME REVISION


 PROJECT OFFICER


	SIGNATURE	DATE	 ORDNANCE FACTORY TIRUCHIRAPPALLI	FOR: COCKING MECHANISM ASSY OF : 12.7MM SRCG	
DRAWN		5/3/20			
CHECKED			HOUSING CONNECTOR		DWG NO. 074253A-00
HOS/DDO		5/3/2020			
OFFICER/PRODN			SIZE	CAGE CODE	SHEET 1 OF 2
OFFICER/QC			A	2291A	
OFFICER/DDO		5/3/2020	SCALE NONE		

DESCRIPTION OF CHANGE: 074253A-00.

PART DISPOSITION: USE AS IS.

COMMENT: CHANGE INNER RADIUS IN MODEL.

FROM:

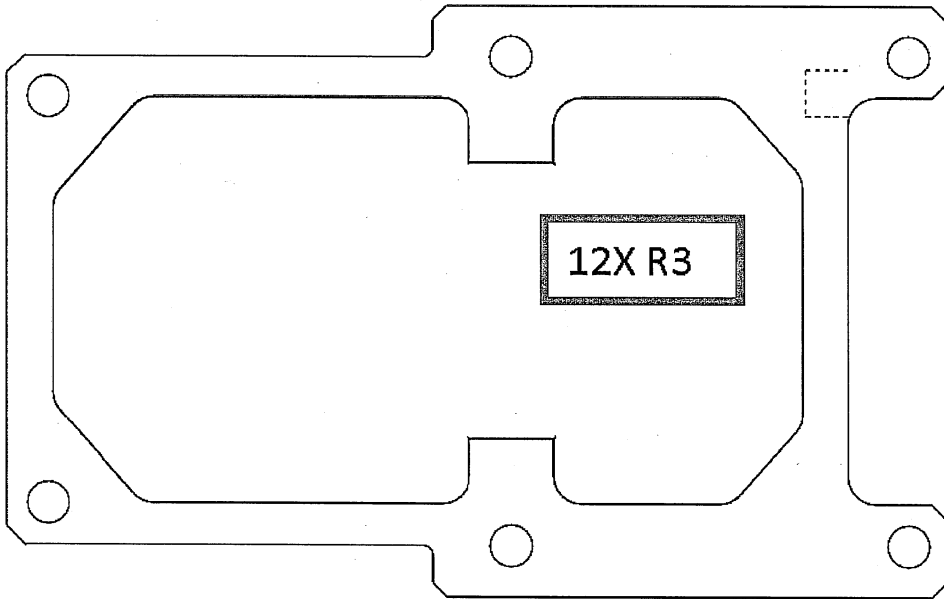

TO:

