
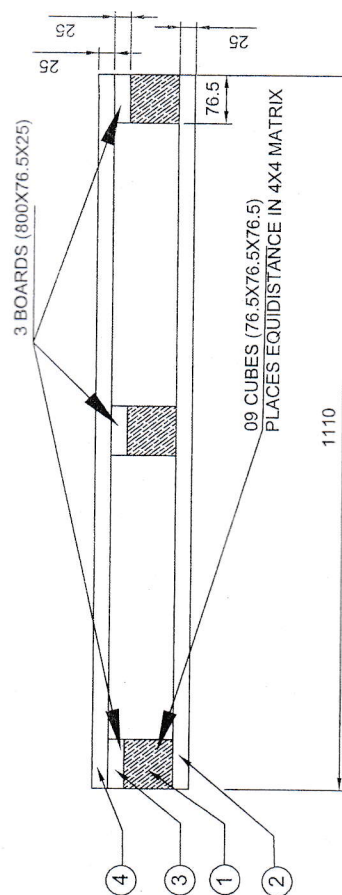


- A. LOWER BOARDS (ITEM 2) WILL BE ATTACHED TO EACH WOODEN CUBE (ITEM 1) WITH 3 NAILS.
- B. UPPER BOARD ITEM (ITEM 4) WILL BE ATTACHED TO THE INTERMEDIARY BOARDS (ITEM 3) ONLY, AND WILL BE CONNECTED BY 2 NAILS THE BOTTOM END OF THESE NAILS WILL BE BENT BACK AND PRESSED INTO THE WOODEN BOARDS THE UPPER BOARD WILL BE ATTACHED TO CUBES (THU, INTERMEDIARY BOARDS) WITH 3 THREAD NAILS.
- C. EQUAL DISTANCE MUST BE MAINTAINED BETWEEN EACH OF THE UPPER BOARDS. THE PALLET SHALL BE TREATED AS PER ISPM-15 & CERTIFIED AND MARKED BY PROPER IPPC MARKING.
- D. ALL WOODEN CUBES MUST BE EQUAL IN HEIGHT AND THE PALLET MUST BE COMPLETELY LEVELED TO THE GROUND AND STEADY, WHEN PLACE ON A STRAIGHT SURFACE.
- E. OVERALL LOAD CARRYING CAPACITY 2500KGS (MINIMUM)

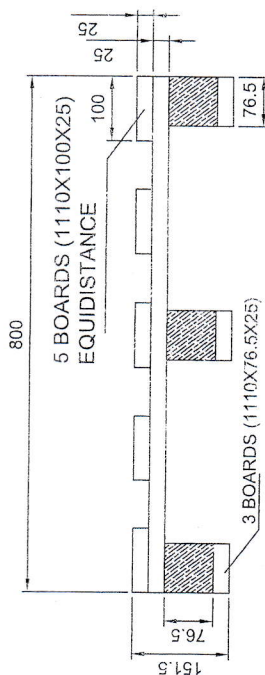

31/24	NOTE No. 'D' IS CHANGED	ITEM NO	MATERIAL PINE WOOD	NO.OFF	NOMENCLATURE	REMARKS
14.03.24		MASS: --				
18/24	WOODEN PALLET TYPE 'S' CHANGED			PALLET FOR PACKAGING		
07.02.24				BOMB 120MM MORTOR HE		
DATE	INTL.			ASSLY. & STORE DRG. NO.		
DATE	INTL.			DRG. NO.: -- PROP/SK-847-B		
DATE	INTL.			-14.03.24		