


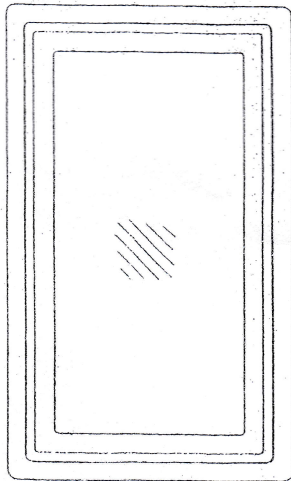


ASSEMBLY DRAWING OF

GLASS WITH RUBBER BEADING

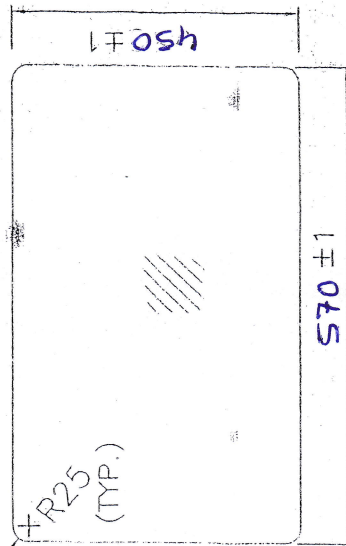


VIEW-A

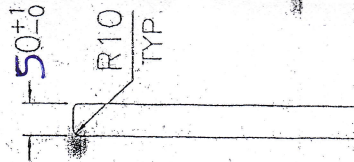

GLASS DRAWING

NOTE:

1. ALL DIMENSIONS ARE IN MM.
2. TOLERANCE ON UNSPECIFIED DIMENSIONS: ARE ± 1 mm.
3. REFER SPECIFICATION NO: **VFJ/R4D/LA/SP/BPV/GYA**
4. GLASS SHOULD GIVE NIJ LEVEL III PROTECTION AGAINST 7.62 SLR FROM 10 MTRS. -DISTANCE.
5. GLASS SHOULD BE SPLINTER PROOF TYPE.
6. GLASS TO BE SUPPLIED WITH MOULDED RUBBER BEADING FITTED WITH THE GLASS.

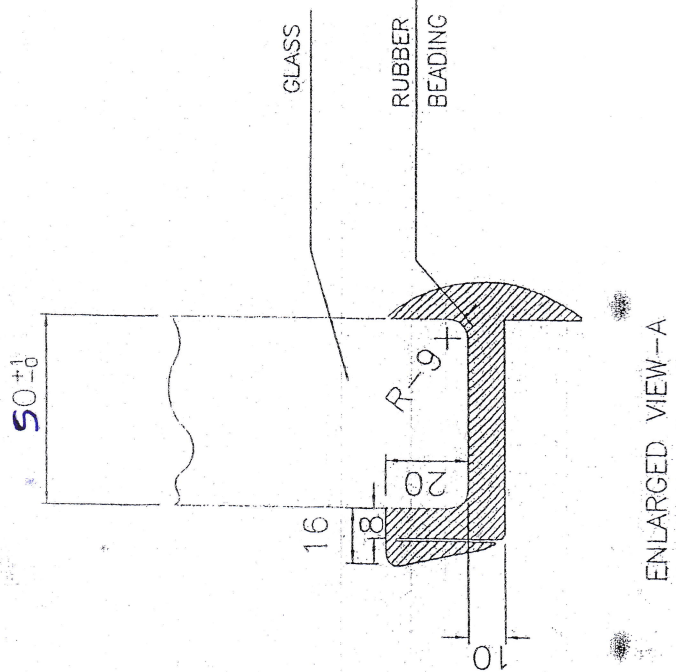

ENLARGED VIEW--A

[illegible]

DRG.NO:- LABDY/SM/Glass/002