


**NOTE:**

- 1. CHAMFERED 0.5x45°.

THIS DRAWING/DOCUMENT CONTAINS  
 COMPANY PROPRIETARY INFORMATION  
 USE OR DISCLOSURE IN WHOLE OR  
 IN PART SHALL NOT BE MADE  
 WITHOUT THE WRITTEN PERMISSION  
 OF OFB

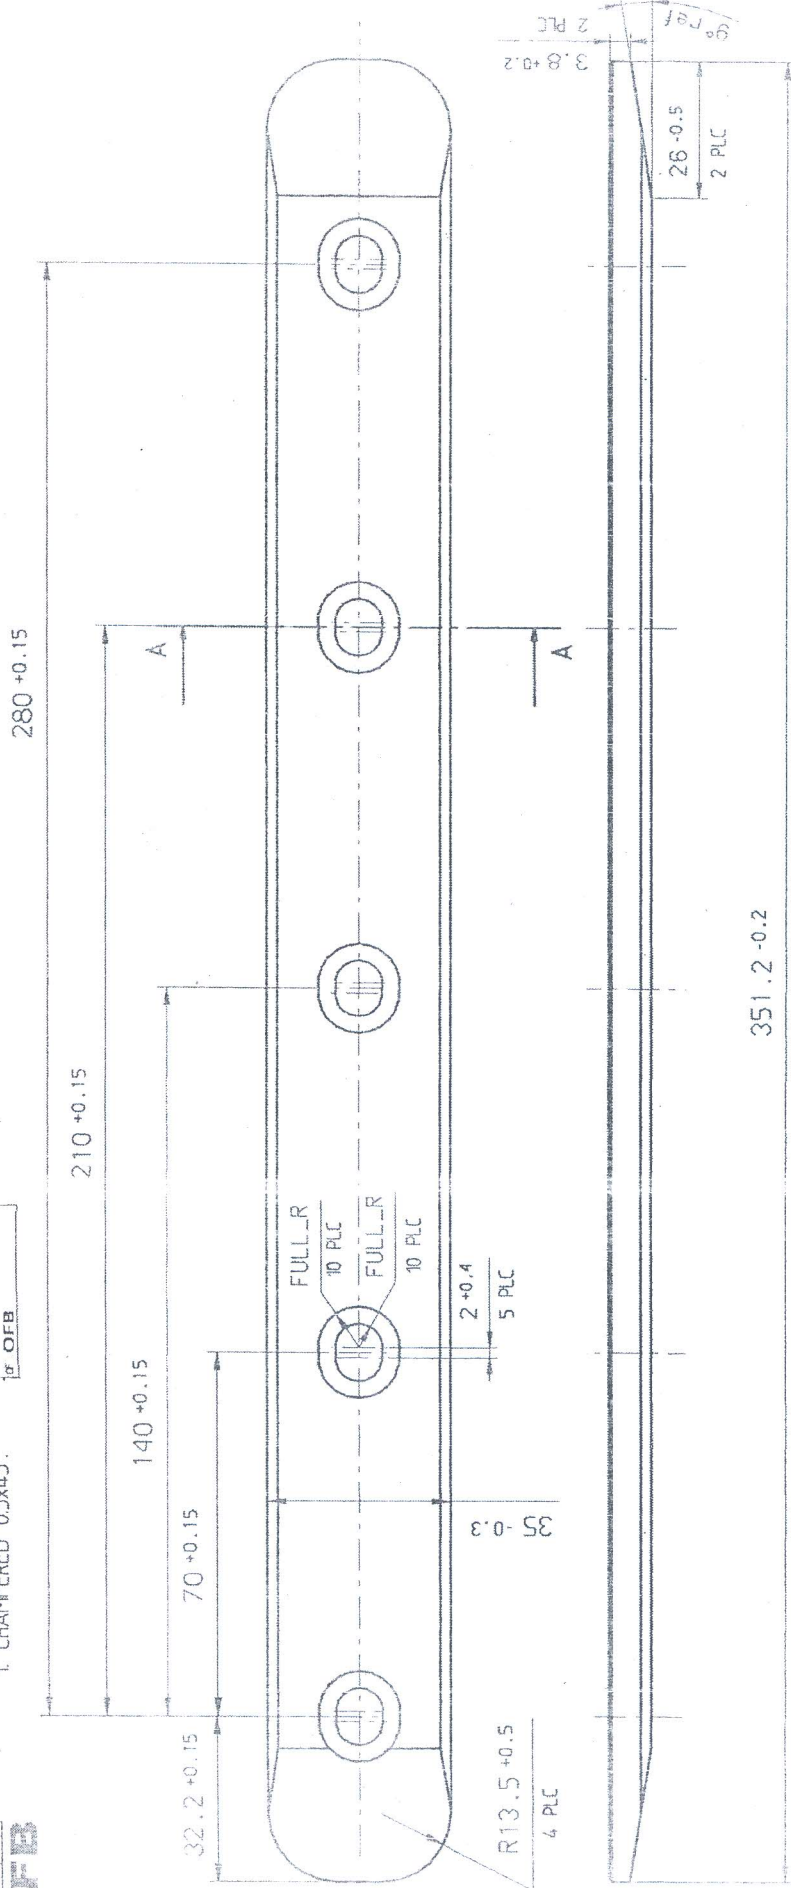


FIT TO BREACH RING BY LOCKSMITHY AT ASSY.

6.5 ± 0.2

3 ref

380285  
04-05-2018



6.3 MACHINING INSTRUCTIONS UNSPECIFIED TOLERANCES FOR DIMENSIONS AND ANGLES DIMENSIONS ANGLES HEAT TREATMENT FINISH PASSIVATION OF BRASS COATING ACCORDING TO SPECIFICATION No. L 10205 B. MATERIAL L=358 BAR 40x10 DINT759 CuZn39pb2 F37	SHARANG 130/155MM_UG_OFB_SIB PART NO.	SH: 1 OF: 1	176-1002 ASSEMBLY	11 A3 SCALE	176-1118 PART NO.
	DATE: 01.01.2007 ALTERNATE/INDIGENOUS MATERIAL SPEC: SS 2874/88 GDE CZ-122 (REF: COA(W) JABALPUR/No. 382402/COA(W) Dn 12 FEB 2005) ID. No. 1973 Location: 01/04/01.	18912-W DR:27-5 -2005 CQA (W), JABALPUR	DRAWING SEALED APPROVED DEVELOPMENT CENTRE, OFB, KANPUR	TOP SLIDE NAME	176-1118 PART NO.