

ISV 1782



PART No.

DRG. CONVENTIONS CONFORM TO IS 496 SPECIFICATIONS.


DIMS. ARE IN mm

DCI 34344-A.

TOL. - MED. 15:2192

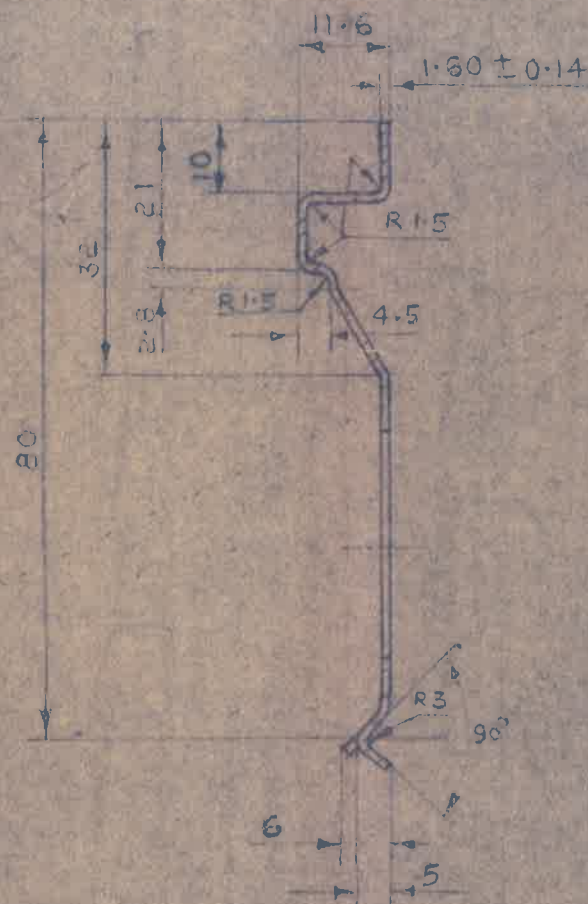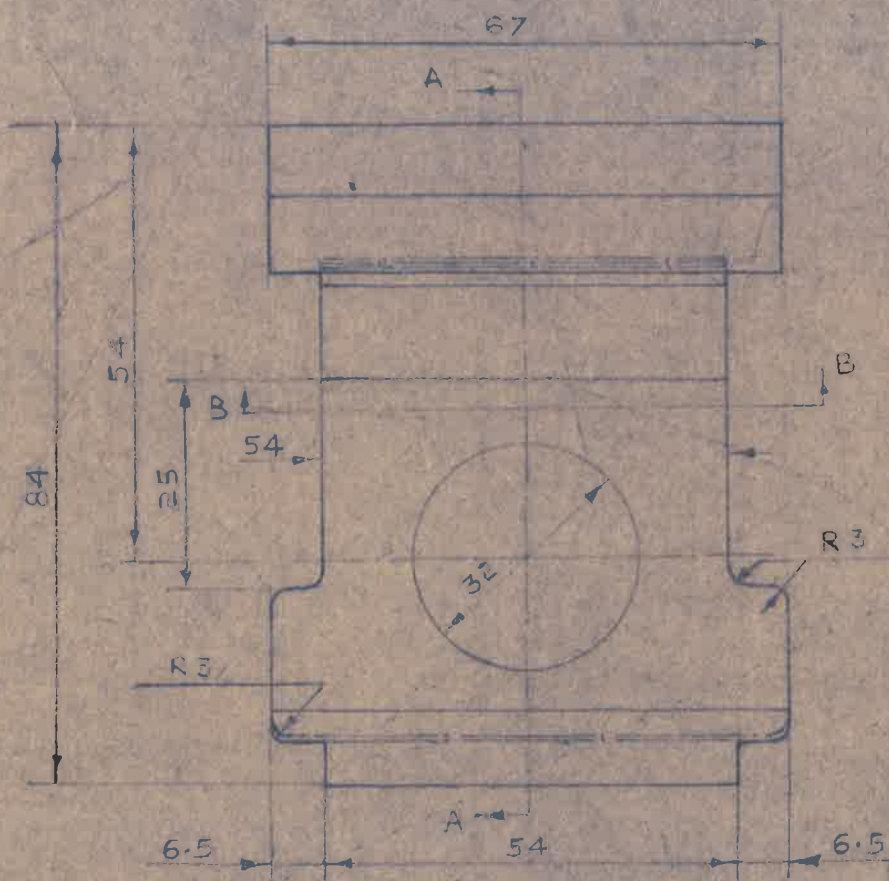

SECTION A-A



SECTION B-B

MATERIAL:-

STEEL TO ~~ANY ONE OF THE FOLLOWING~~ SPECIFICATION.

IS: 513-1958 COLD ROLLED AND ANNEALED TYPE 'D'

BEST SURFACE.

~~II) BS: 1449 DEL-1972 CS 4 SECTION C COLD ROLLED AND ANNEALED.~~

11-1-94	DC 35644-A	DRG. FORMAT BOX ENTRIES ADDED. IS SPECIFICATION WAS IS: 696. SPECIFICATION UPDATED. NOTE BS 1449 ---- ANNEALED DELETED.				10 2
16-3-88	DCI 34344-A	DRG. PROV. SEALED.				02
R. No.	DATE	AUTHORITY	REVISION	ZONE	AHSP	D.O.
					SIG.	
DRG. SEALED :— 16-3-88 (PROV)						

DRN:- VNL	CHD:- P.M.D.	TRD:-	COMP:-
APPD. C.D. MAN	Q.I.C. D.O.	SCALE:- 1:1	EST. MASS:- 63g.
MATERIAL:- AS ABOVE.		GAUGE SCHD. NOT APPLICABLE	DATE:- 9-1-87
PROTECTIVE FINISH:- NOT APPLICABLE.			

ASSY. DRG.	ISV 517 A
DESIGNER'S REF.	CIA/AMN/2476
PART No.	ISV 1782
D.S. CAT. No.	NOT APPLICABLE
AHSP	C.Q.A.(A.) KIRKEE

PLATE ENGAGING