

5360-007117

DS. CAT. No.

MARKING ON TAG
Yr. OF Mfg.
MANUFACTURER'S CODE
D.S. CAT. NO.

DRG. CONVENTIONS CONFORM TO JSG-0104
DIMNS. ARE IN mm.
DIMENSIONS FOR UNTOLERANCED DIMENSIONS ± 0.2
UNLESS OTHERWISE STATED




WIRE DIA. — 1.2
No. OF ACTIVE COILS — 9
WOUND — RH. OR LH.

STRESS RELIEVED. * SHOULD BE CONFIRMED AFTER THE
CRAMP TEST TO LENGTH 16'0 FOR 24 HOURS.
THE SPRING SHOULD PASS SMOOTHLY THROUGH A BLOCK
HAVING SLOT OF DIMENSIONS 48.3 X 17.05 X 160 HEIGHT.

1.15 Kg
± 10%

1.95 Kg
± 10%

CERTIFIED COPY OF THE
STORE DRG/GAUGE DRG/Sch/
SPECN/NOTE SHT.
DATE: 15.07.09 CD

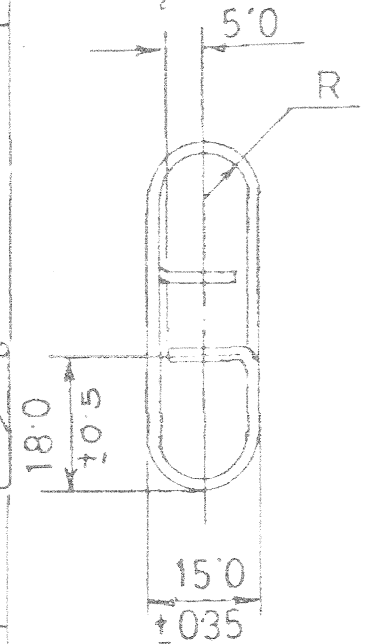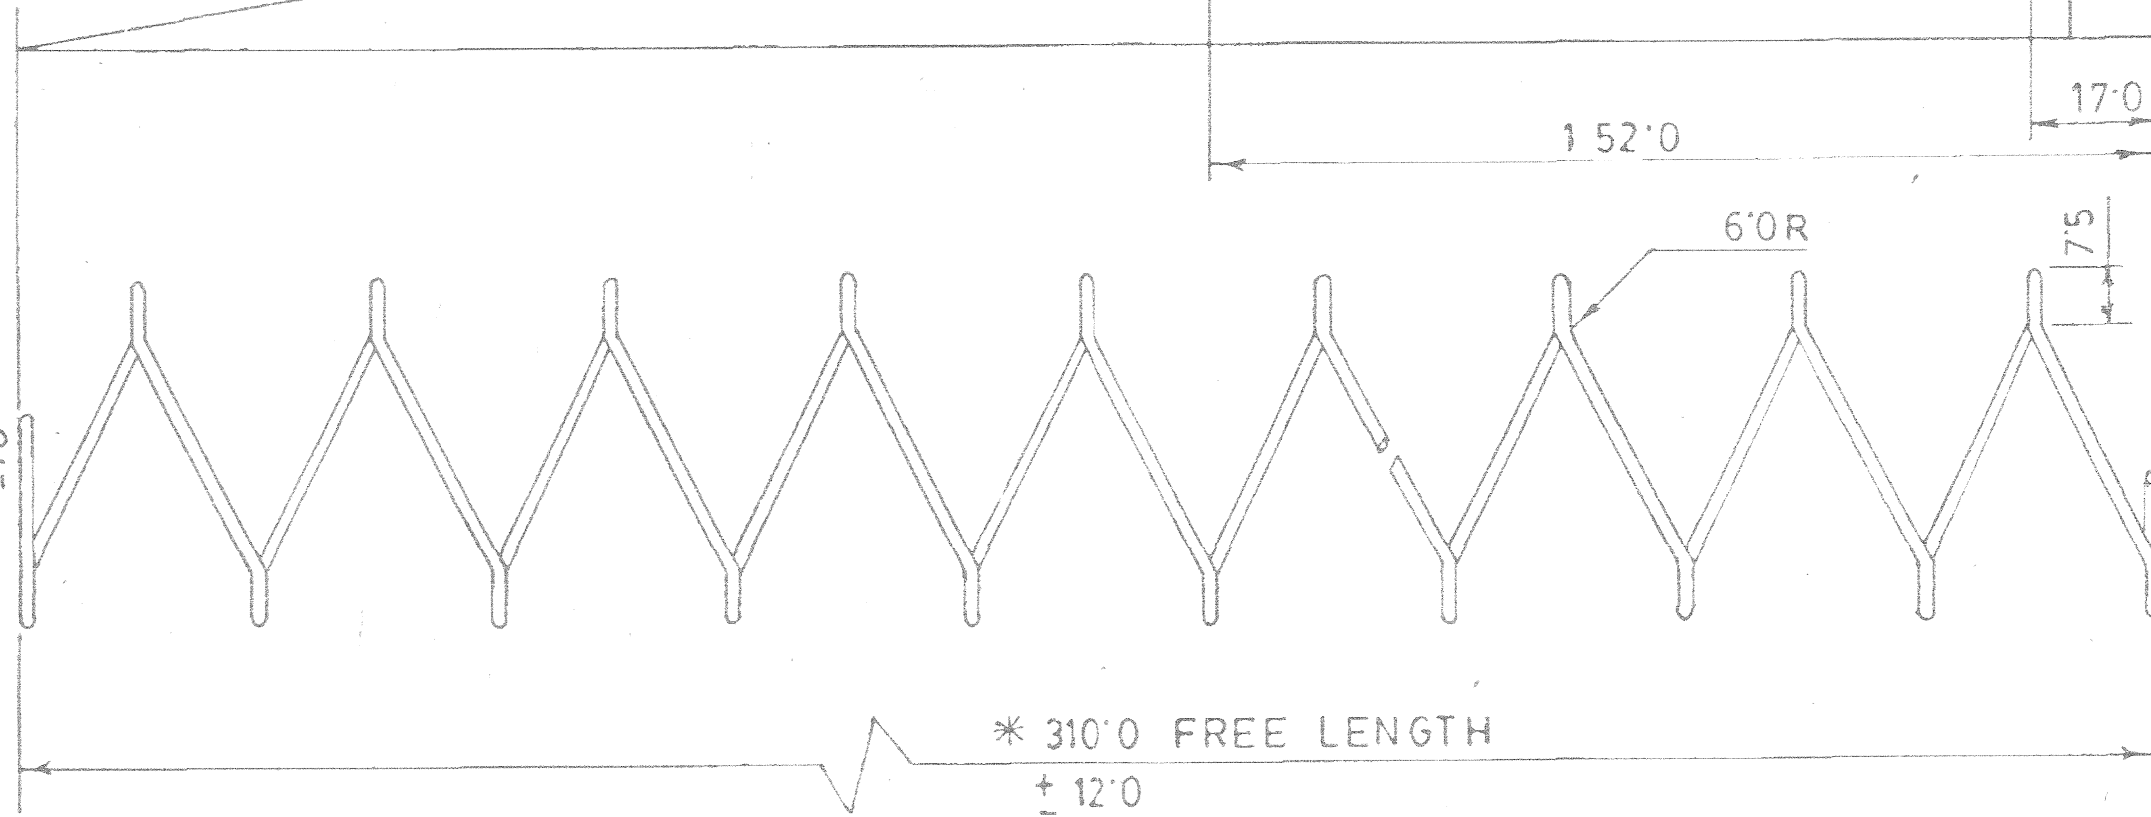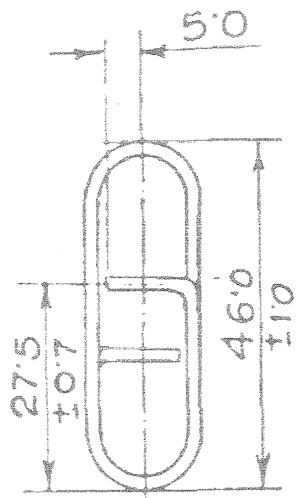

ALTERNATIVE MATERIAL:-
BS: 5216-91 SECTION FOUR CODE REFERENCE 'M' TENSILE
STRENGTH GRADE 5 & DIA. WILL BE CONSIDERED 1.18mm. FOR
THIS ALTERNATIVE MATERIAL ONLY.

20-2-08	26401-SA	ALTERNATIVE MATERIAL ADDED.			DRN.	CHD.	TRD. P. RAY.	COMP. <i>M. S. R. B. S.</i>	AHSP. CQA(SA) CHAPUR
18-5-07	26339-SA	MATERIAL AMENDED			SCALE:- 1:1		EST. MASS.		ASSY. 1005-007783
7-9-2001	25116-SA	MATERIAL AMENDED					APPROVED	DT. 15.5.87	
03.12.97	23967-SA	PROFORMA CHANGED, MARKING NOTE ADDED, NEG. RE-TRACED AND DRG. PROV. RE-SEALED			DT. 03.12.97	<i>Ande</i> I/C; D.O.	NEG. RE-TRACED		
		PREVIOUS D.C.No. 23754-SA.					MATERIAL:- STEEL; IS: 4454 Pt-1: 200! Gr. DH WITH UTS VALUE MIN 2340 N/mm ²		DGNRS REF. ARDE. SK.2689/274
DATE	AUTHY.	BRIEF RECORD	ZONE	I/C, D.O.	G.O		H.T./HARDNESS:-		PART NO.
SEALED:- PROV. D.C.No. 23754-SA, DT. 20.3.97				SIGN.			PROTECTIVE FINISH:-	PHOSPHATED TO SPECN JSS: 0465-01: 1039	DRG. NO.
NOMENCLATURE:- SPRING PLATFORM							CLASS II (ACCELERATED), OIL FINISH.		D.S. CAT. NO. 5360-007117