


92C010-593C5 ON DIMNS. ARE IN MM.

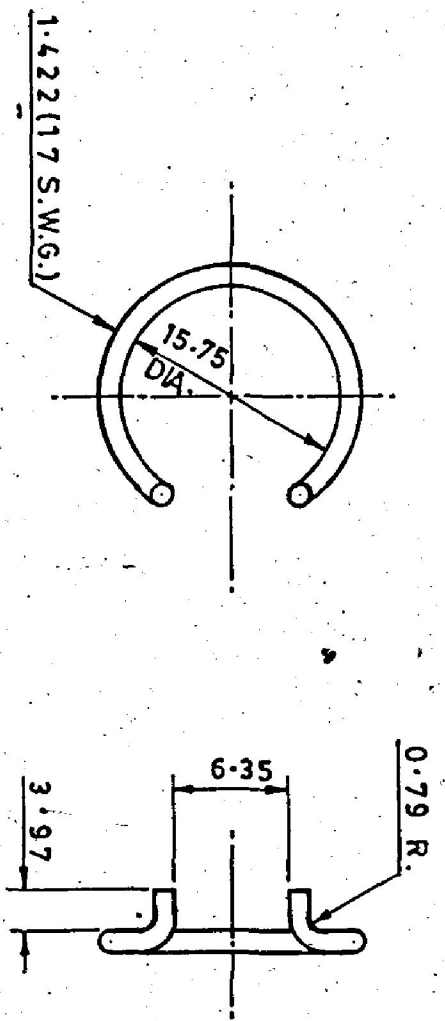

NOTES:-

STRESS TO RELIEVED AT 200°C FOR HALF HOUR.

FOR EXPLANATION OF DETAILS WHEREVER NOT SPECIFIED REFER D. D. NOTE SHEET NO.3 (LATEST ISSUE).

ALT. MAIL :-

STEEL BS: 1429 EN 42B OR EN 42C OR
IS: 4454-1967 Gr.3.

METRIC

16-03-99	24290-SA	PROFORMA CHANGED, CONVENTION NOTE DELETED, NEG. RE-TRACED & DRG. RE-SEALED.						
		PREVIOUS D. C. NOS. 14974-SA, 17596-SA & 22889-SA						
DATE	AUTHY.	BRIEF RECORD						
SEALED:- D. C. 14974-SA, DT. 7.1.77								
DRN.	CHD.	TRD. SHAWD	COMP. <i>Mambur</i>					
SCALE :- 2:1		EST. MASS :						
DT. 16-3-99	<i>Shawd</i> I/C: D.O.	APPROVED	DT. 19.6.67					
MATERIAL :- SPRING STEEL, BS: 5216-1975 ND 3.			NEG. RE-TRACED.					
H.T./HARDNESS :-								
PROTECTIVE PHOSPHATE TO SPECN. JSS-0465-01:								
FINISH :- 1988 CLASS-1, OIL FINISH.								
NOMENCLATURE :- RING, RETAINING GAS REGULATOR								

AHSP CQA(SA) CHAPUR

ASSY. 1005-001504

DGNR'S REF. ARDE 657/243

PART NO.

DRG. NO.

D.S. CAT. NO. 5365-010326

1 2 3 4