




962E10-9156  
D.S. CAT. No. 9515-013296

DRAWING CONVENTIONS CONFORM TO ISG: 0104  
DIMMS ARE IN mm. (GEN. TOL. 'MEDIUM' IS : 2T02)

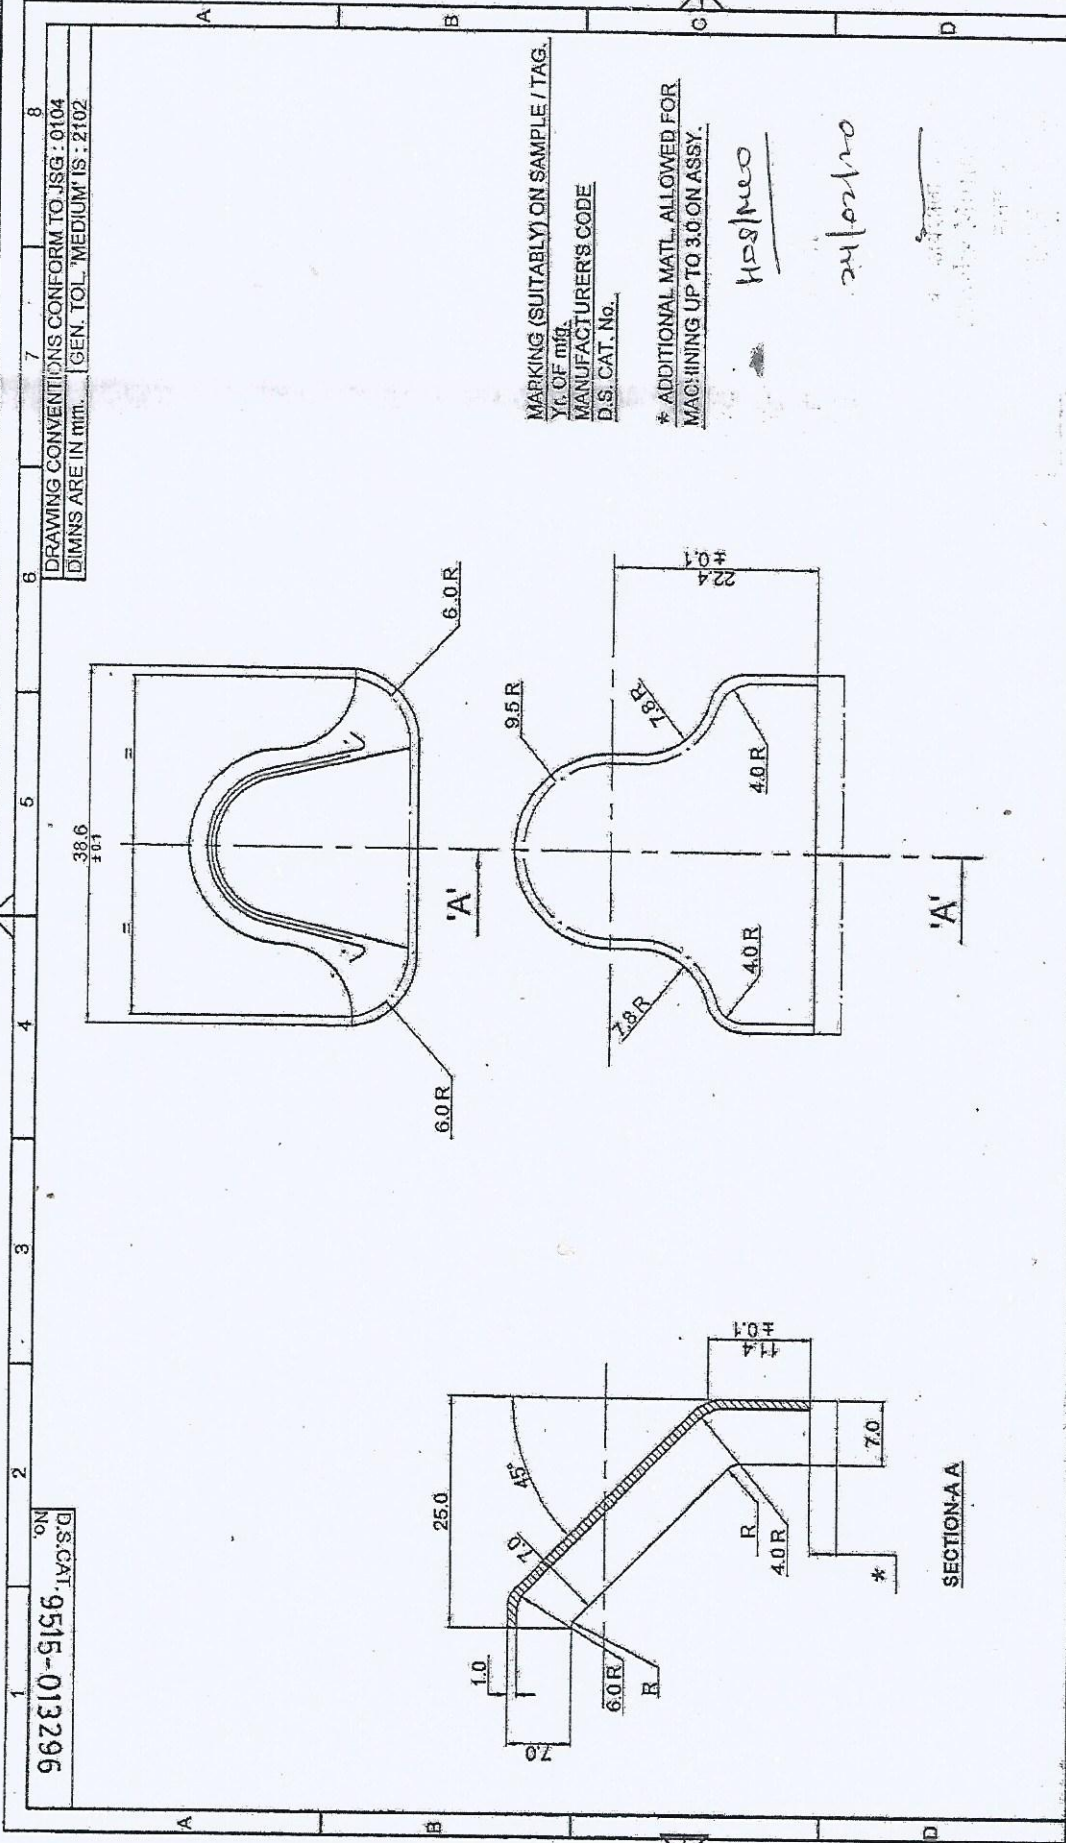

MARKING (SUITABLY) ON SAMPLE / TAG.  
Yr. OF mfg.  
MANUFACTURER'S CODE  
D.S. CAT. No.

\* ADDITIONAL MATL. ALLOWED FOR  
MACHINING UP TO 3.0 ON ASSY.

*Handwritten:* Hoshino  
24/02/20

18.11.10 269713	MATERIAL AMENDED.	DRN. No. 2:1	CHD. 26427-54	TRD. APPROVED	COMP.	AHSP. COA(SA) ICHAPUR
23.11.10 265535	IN ASSY. 1005-560621 WAS COA(SA) 5A-736	DI. 22-7-09	IC. DO. <i>Alfa</i>	DI. 22-7-09	FOR COA(SA) <i>R. JTO.</i>	ASSY. 1005-560621
25.9.09 26446-51	D.S. CAT. NO. R000	MATERIAL: IS: 7226-1974 DESIGNATION C40.		H.T. HARDNESS: 320-360 HV		DGNRS. ARDE SK 3746/121 3 SHTS. SHT. 2
22-7-09 26447-54	DRG. PROJ. SEALED.	DATE AUTHY. BRIEF RECORD		SIGN		PART No.
SEALED: PROJ. SEALED, 26427-54, DT. 22-7-09.		ZONE IC/DO. G.O.				DRG. No. COA(SA) SK737
NOMENCLATURE: <b>PLATE REAR COVER</b>						D.S. CAT. No. 9515-013296

129095-5001  
D.S.CAT. No.

0219179140  
HOSLMCO

DRAWING CONVENTIONS CONFORM TO JSG-0104.  
DIMNS. ARE IN mm GEN. TOL. MEDIUM IS: 210Z.

OPERATION TO BE DONE IN CONJUNCTION WITH  
COVER 9515-013296 &  
PLATE REAR COVER 1005-560561  
AFTER BRAZING



9515-013296  
TO BE SILVER BRAZED

1005-560661

THIS FACE TO BE MACHINED FLUSH WITH THE COVER  
AFTER BRAZING

11.5 (NOMINAL) MACHINE TO SUIT  
SPECIAL RECOIL ASSEMBLY  
D.S.CAT. NO. 1005-560703 (ON ASSY.)

NOTE:- 1.2mm ENGRAVING/STAMPING  
AT THE BASE OF THE COVER BODY  
(LETTER SIZE 3x2x0.5 DEEP)

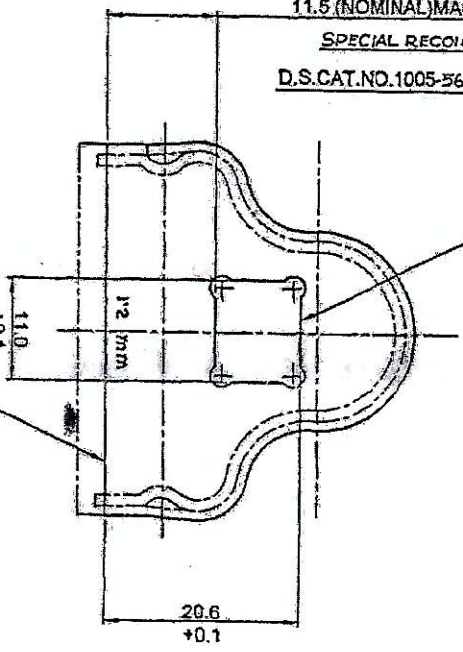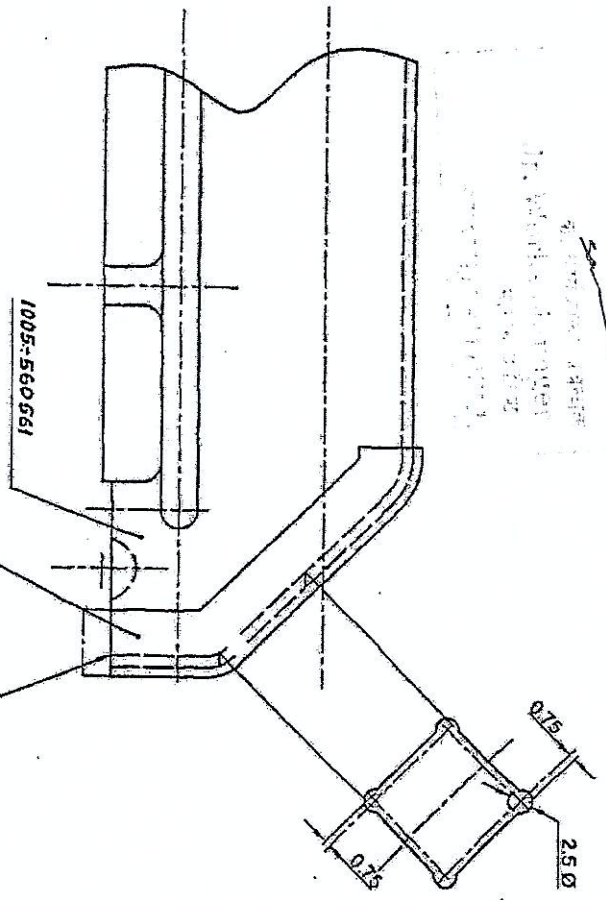

07-02-12 266608-3 1005-560661 IN ASSY 1005-560662 WAS COA(SA)SK-761	19-02-09 266933-3 O.S. CAT. NO. ADDED.	02-01-10 264838 COA(SA)SK-781 WAS 1005-567810	20-5-09 264451 1005-560561 29515-013296 WAS COA(SA)SK 737, COA(SA)SK-738 RESPECTIVELY AND MARKING 1.2 mm ADDED IN ZONE 7IC	24-5-08 264222 ORG. SEALCD.	DATE AUTH	ZONE	IC/D.O	SIGN.	DRN.	SKP	CHD	TRD	COMP.	AHSP	COA(SA) ICHAPUR
SEALCD. PROV. D.C. No - 26420-5A, PRT. 24-09-08	BRIEF RECORD														
NOMENCLATURE: COVER AND PLATE BRAZING									PROTECTIVE FINISH PHOSPHATED TO SPECN. JSG-0465-01-1894 CLASS-II (ACCELERATED) OIL FINISH.						
H.T. HARDNESS:-									FOR COA(SA)						
MATERIAL:-									DGN'S ARDE SK 3145/121 3 SRTS. SRT. 3						
PART No.									DRG. No. COA(SA)SK-736						
D.S.CAT. No.									D.S.CAT. 1005-560621						