


REFERENCE

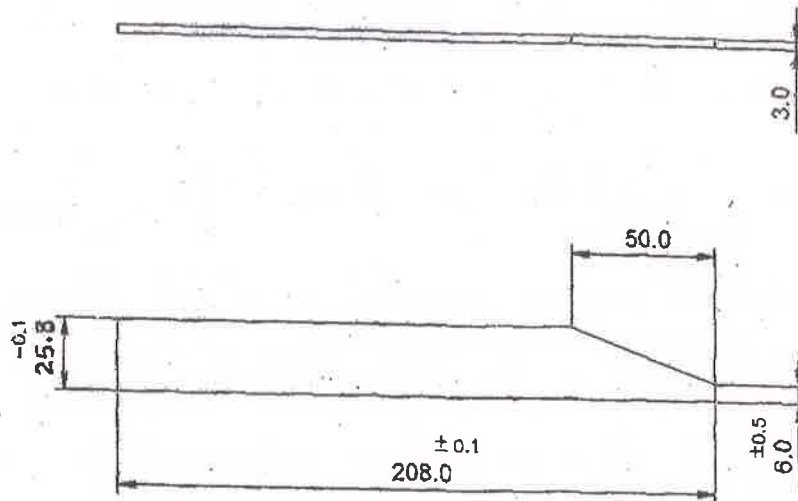


NOTE :-

ENSURE TIGHT FITMENT BETWEEN OUTER AND
INNER CYLINDERS PRIOR TO WELDING

13-02-14	C-1&2	DIMENSIONS AMENDED	ARD 2453	<i>P. Srin</i>
14.3.11	B-4	DIM. 26.0-0.1 AMENDED	ARD 2413	<i>g</i>
08-09-09		DCA No ADDED	ARD 2396	<i>g</i>
02-06-09		APPROVED	DGNAL	
R.No	DATE	ZONE	BRIEF RECORD	AUTHORITY INITIALS
SCALE:-1:2	TOL.		DIMENSIONS ARE IN mm	ASSY DRG No. NASK 1072
DGN	DRN <i>YV</i>	TCD	COMP <i>L</i>	CHD <i>g</i>
PASSED <i>g</i>	APPD. <i>g</i>			ASSY DRG LIST.
	CTO(D)	DGNAL	GEN SPEC :- IS:2102	DTE GEN OF NAVAL
MATL:-STEEL			STORE SPEC :-	ARMAMENT INSPECTION
MATL SPEC:- BS:970(Pl.)-83			STORE REF No.	IHQ,MOD (NAVY) N. DELHI
Gde 080 m40			GAUGE SCH No.	
PROTECTIVE FINISH:- SEE ASSY DRG.			DCA No 9535015732	

STRIP



DRG No.
NASK 1072/3
(PROVISIONAL)

TRIM ON THIS LINE WHEN SUPPLIED TO TRADE

A-4
USED ON:ROCKET RGB-60

BASED ON:-CNAI(V) DRG No. NAI(V) 8011/3.DT.21-02-08