8	7	6	5	4	3	2	1

PART No. ISX 393

DRG. CONVENTIONS CONFORM TO IS:696

DIMS. ARE IN mm

D.C. 34543-A.

F

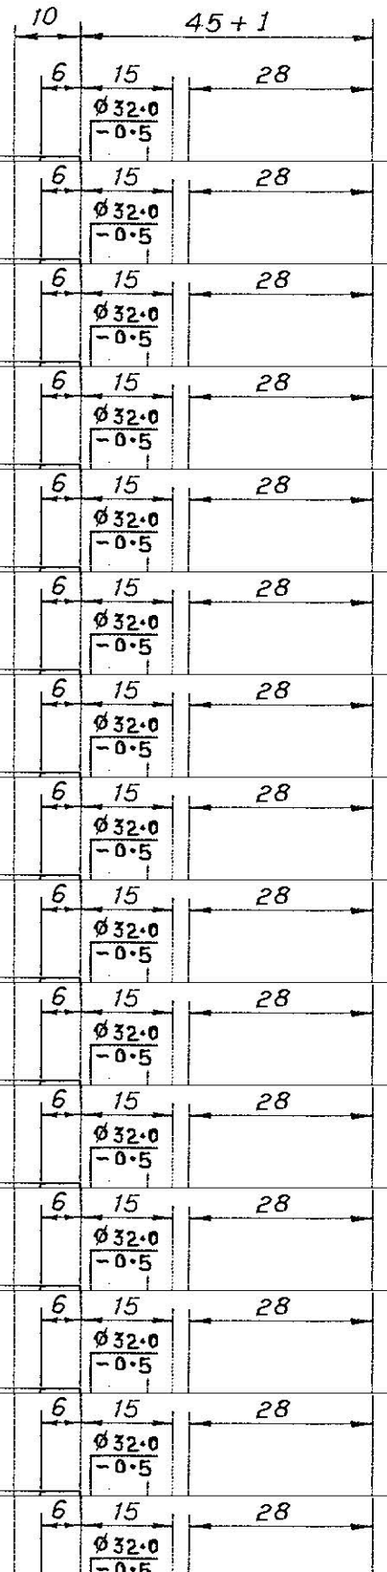

NOTES:-

1) TOLERANCE ON UNTOLERANCED DIMENSIONS AS PER IS: 2102 MEDIUM CLASS.

2) SURFACE OF PLUGS SHOULD BE SMOOTH WITHOUT CRACKS, BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.

BUCKLING AND FOREIGN INCLUSIONS.

3) THREADS OF PLUG WILL BE CHECKED WITH GO THREAD RING AND NO GO PLATE SNAP GAUGE.